



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION

Part No. : **TLS.20.1F21**

Description : Shockwave 450-470MHz
Permanent Mount External Antenna
N Type(F) connector

Features : CDMA 450-470MHz with 46% efficiency
Mechanically robust for indoor/outdoor applications
Height: 79.45mm(3.13") ; Diameter : 42mm(1.65")
IP67 and IP69K Waterproof
N type(F) connector
RoHS compliant



1. Introduction

The Shockwave TLS.20.1F21 is a mechanically robust, waterproof, external antenna operating at 450-470MHz with 1 meter of low loss CFD-200 and SMA(M) connector. It has been designed to be used on a Ground Plane. Common applications are, for instance :

- Public safety
- Smart meters
- Mesh networks
- Transportation

The antenna has greater than 46% efficiency and -2.6dBi peak gain within the application band on a 30x30 cm ground plane. Stable radiation patterns over low angles provides consistent gain in the horizontal plane, meaning that it is especially suitable for mesh networks or hot spots.

A unique indent tab on the base of the antenna allows a wrench to be used to solidly lock the antenna on top of its mounting location while tightening up the nut beneath the metal panel. Waterproof O-rings around the bottom base prevent water from leaking under the antenna.


The TLS.20 antenna is IP67 waterproof and IP69K resistant against high pressure water jets in commercial cleaning environments, which makes the antenna ideal for 450-470MHz applications in harsh outdoor environments.

2. Specification


| ELECTRICAL | | | |
|--------------------------|---|-------|-------|
| Operation Band | CDMA450 | | |
| Operation Frequency(MHz) | 450 | 460 | 470 |
| | On 30 x 30 cm ground plane | | |
| Efficiency (%) | 51.17 | 54.59 | 46.78 |
| Peak Gain (dBi) | -1.50 | -1.14 | -1.80 |
| Average Gain (dBi) | -2.90 | -2.62 | -3.29 |
| Return Loss (dB) | < -3 | | |
| Impedance | 50 Ω | | |
| Polarization | Vertical | | |
| Radiation Property | Omni-Directional | | |
| Max Input Power | 100 W | | |
| MECHANICAL | | | |
| Dimension (mm) | Height: 79.45mm(3.13") ; Diameter : 42mm(1.65") | | |
| Connector | N type (F) | | |
| Material | Housing : UV Resistant ABS , Base : Nickel Plated Zinc Alloy | | |
| Weight (g) | 169 | | |
| Rec. Torque for Mounting | 4.018 N.m | | |
| Max. Torque for Mounting | 9.8 N.m | | |
| ENVIRONMENTAL | | | |
| Waterproof Rating | IP67 and IP69K | | |
| Operation Temperature | -40°C to 85°C | | |
| Humidity | Non-condensing 65°C 95% RH | | |

3. Antenna Characteristics


3.1. Return Loss

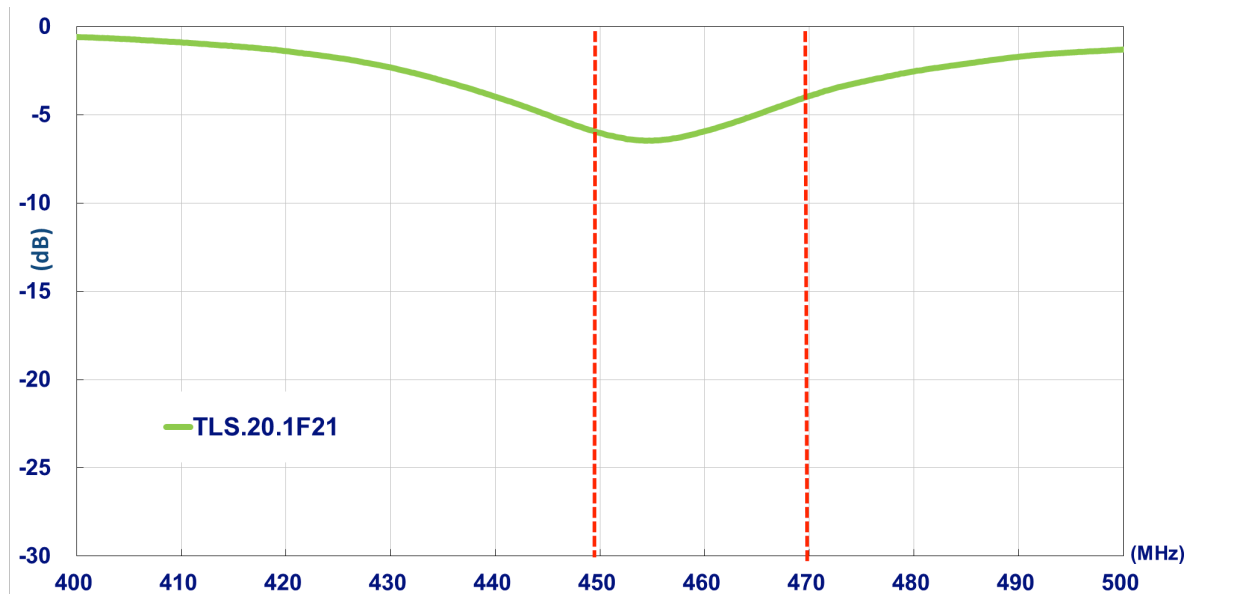


3.2. Efficiency

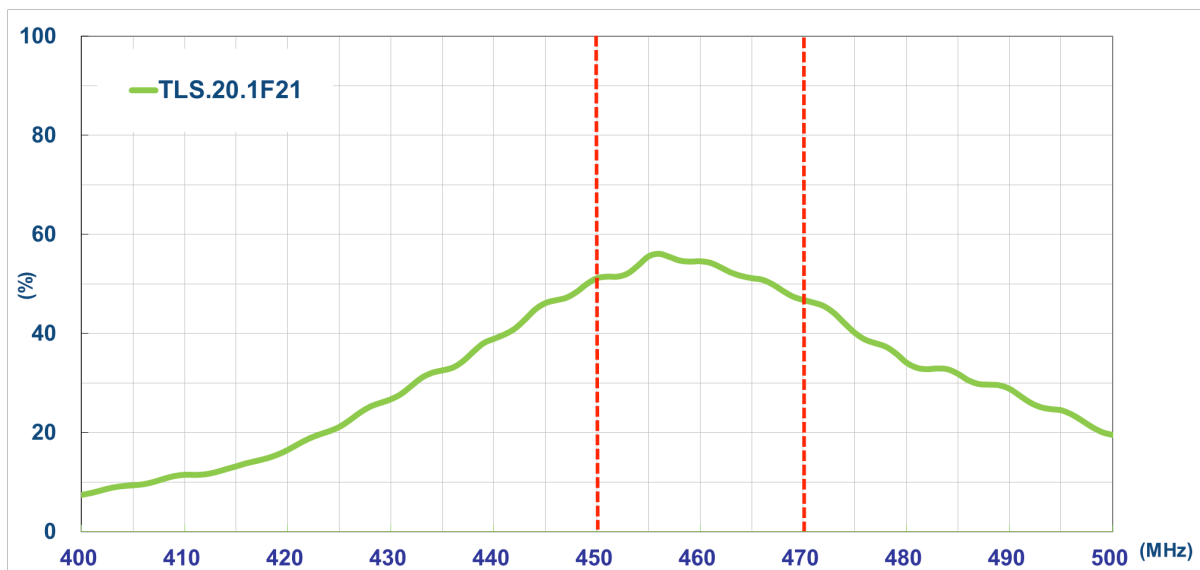

3.3. Average Gain

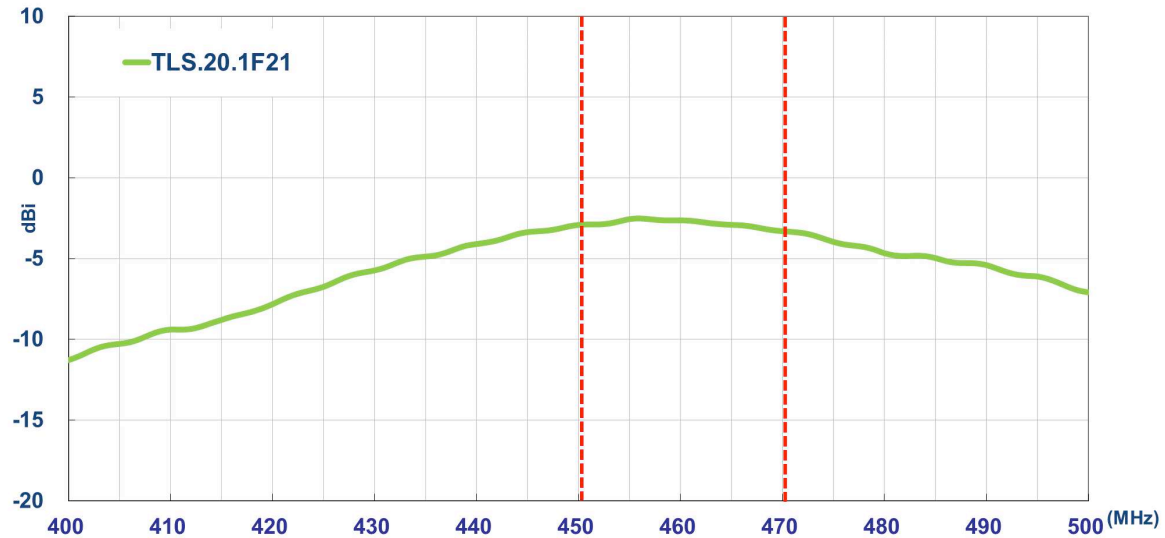


3.4. Peak Gain

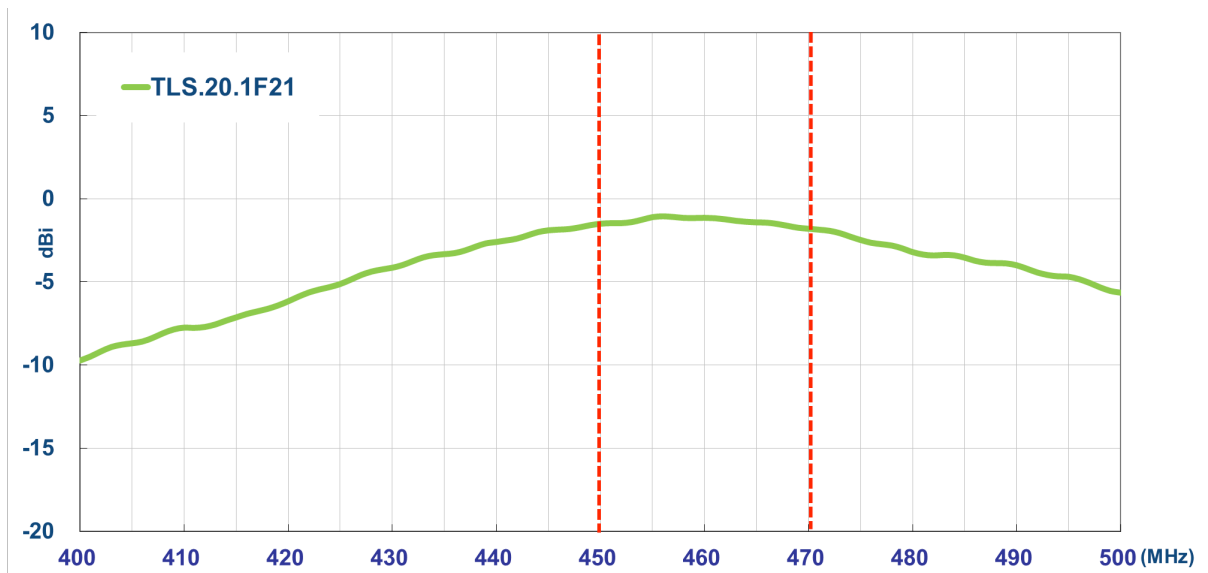

4. Antenna Radiation Pattern


4.1. Measurement Setup

The TLS.20 antenna is tested in a CTIA certified ETS-Lindgren Anechoic Chamber. The test setup is shown below.

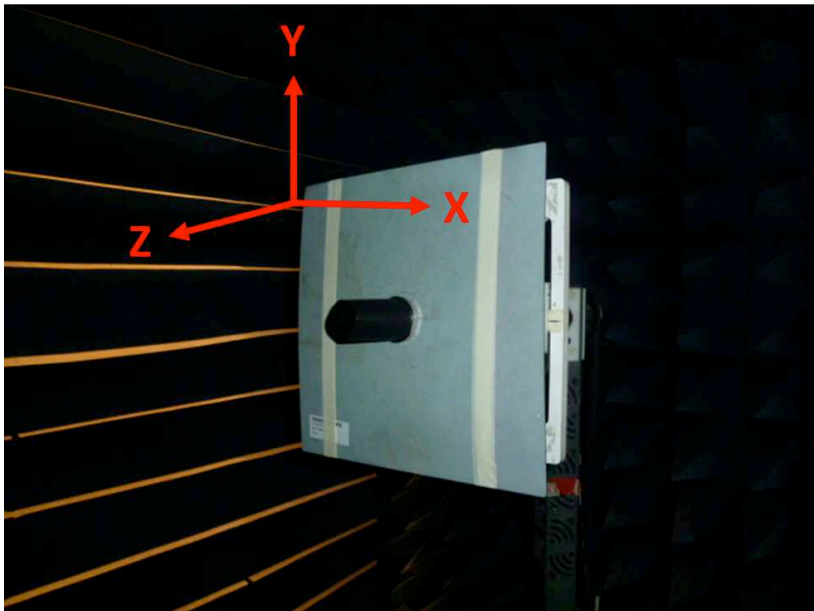


4.2. 2D Radiation Pattern


XY Plane

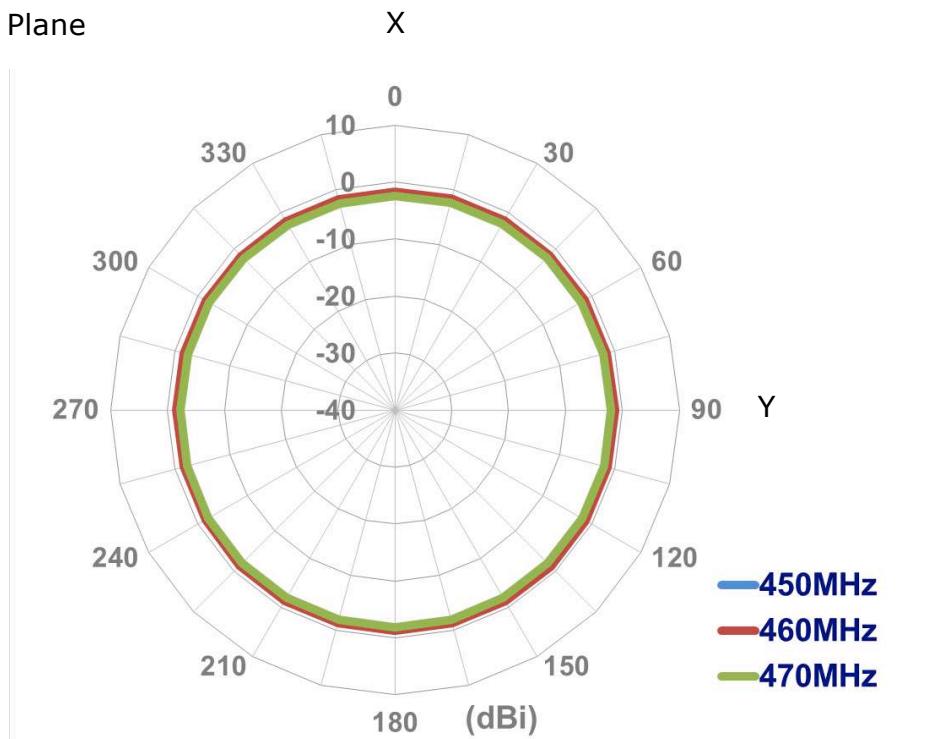

XZ Plane

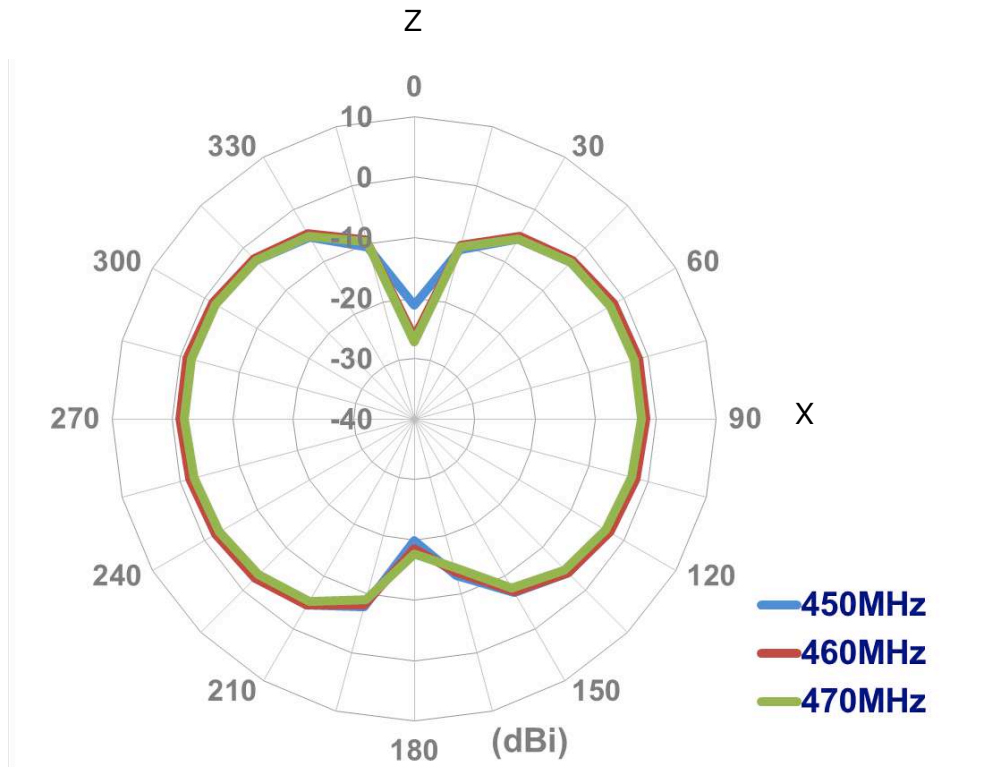


YZ Plane

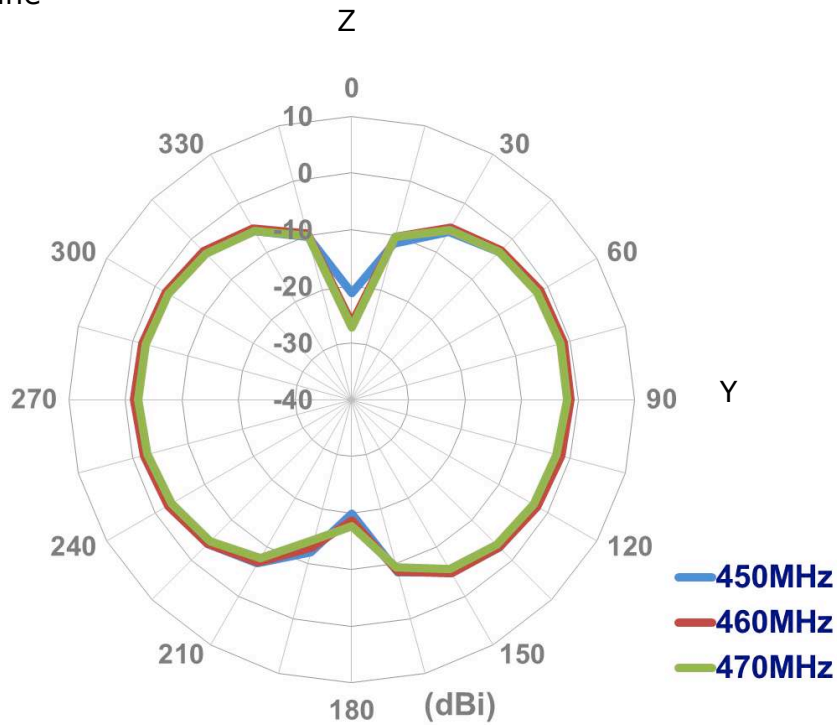


4.3. 3D Radiation Pattern


@450MHz

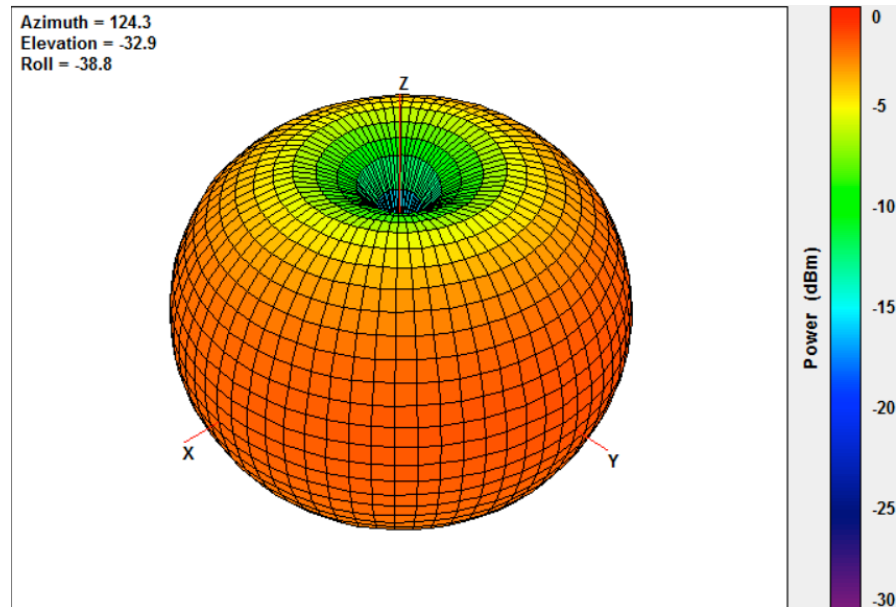


@460MHz

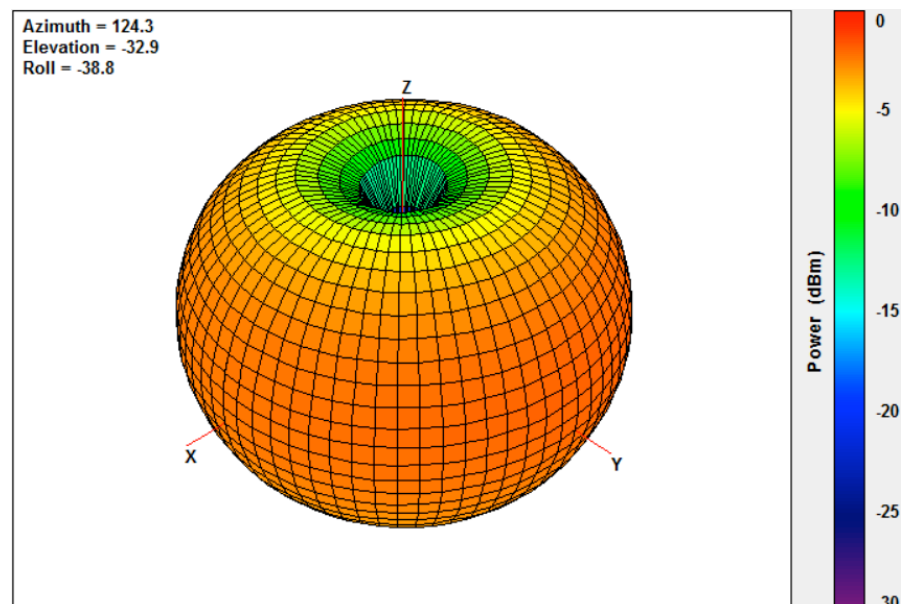

@470MHz

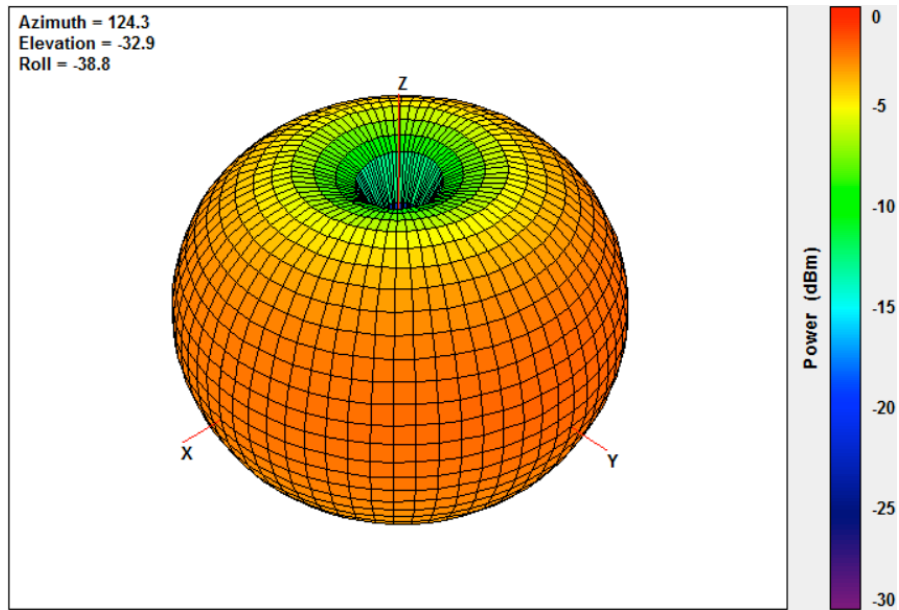


5. Mechanical Drawing

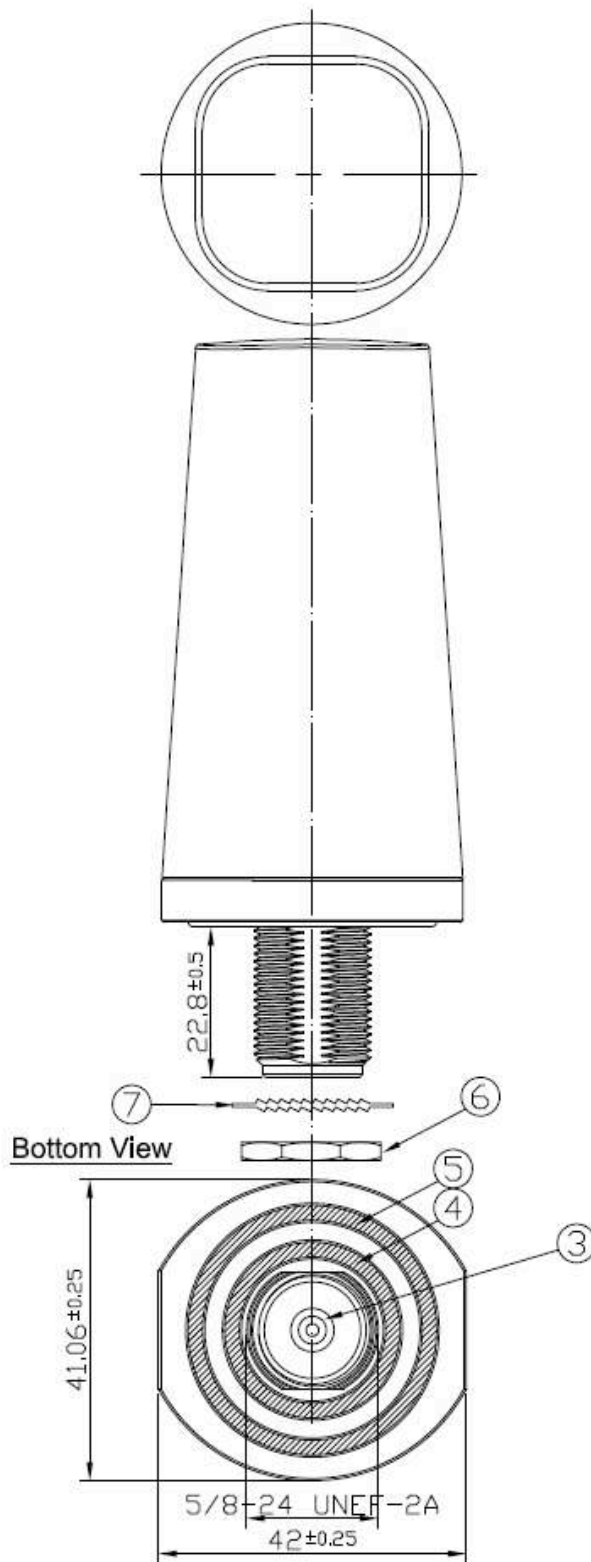

| | Name | Material | Finish | QTY |
|---|----------------|------------|-----------|-----|
| 1 | Antenna Top | ABS | Black | 1 |
| 2 | Antenna Bottom | Zinc Alloy | NI Plated | 1 |
| 3 | N Type F | Brass | NI Plated | 1 |
| 4 | O Ring 1 | NBR | Black | 1 |
| 5 | O Ring 2 | NBR | Black | 1 |
| 6 | Nut | Brass | NI Plated | 1 |
| 7 | Washer | Brass | NI Plated | 1 |

Unit : mm

6. Installation

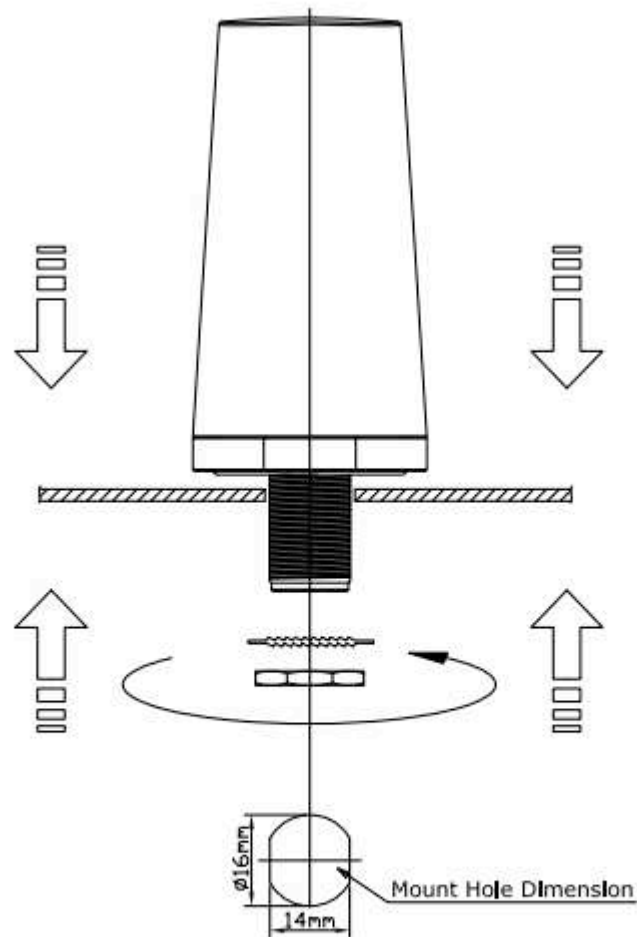

Recommended torque for mounting is 4.018 N.m or 41 kgf.cm


Maximum torque for mounting is 9.8 N.m or 100 kgf.cm

7. Packaging


TLS.20.1F21

Packaging Specifications

1 No. TLS.20.1F21 per small box
Box Dimensions - 66 x 66 x 115mm
Weight - 210g

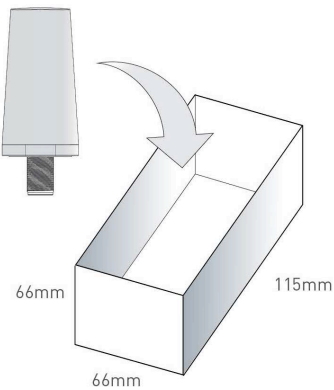

1 Outer Carton
Carton Dimensions - 430 x 380 x 280mm
60 pcs TLS.20.1F21 per carton
Weight - 13.02Kg

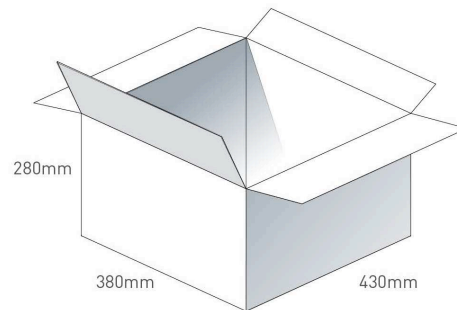

Pallet Dimensions 1100*1100*1250mm
30 Cartons per Pallet
10 Cartons per layer
3 Layers

