



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				

APPLICABLE STANDARD									
RATING	OPERATING TEMPERATURE RANGE	-25 °C TO 80 °C			STORAGE TEMPERATURE RANGE	°C TO °C			
	VOLTAGE	125 V AC			CURRENT	500 mA			

SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
------	-------------	--------------	----	----

CONSTRUCTION				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	○	○
MARKING	CONFIRMED VISUALLY.		○	○

ELECTRIC CHARACTERISTICS

CONTACT RESISTANCE	100 mA DC (OR 1000 Hz AC). MEASUREMENT POINTS SHALL BE AS FOLLOWS. (ONE EXAMPLE OF CONNECTOR CONFIGURATION IS SHOWN.)	230 mΩ MAX.	○	○
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.	○	○
VOLTAGE PROOF	500 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	○	○

MECHANICAL CHARACTERISTICS

MECHANICAL OPERATION	200 TIMES INSERTIONS AND EXTRACTIONS.	① CONTACT RESISTANCE: 250 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	○	—
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, — m/s ² AT 2 h, FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 5 μs.	○	—
SHOCK	490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIME FOR 3 DIRECTION.	② CONTACT RESISTANCE: 250 mΩ MAX. ③ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	○	—

ENVIRONMENTAL CHARACTERISTICS

DAMP HEAT (STEADY STATE)	EXPOSED AT 40 °C, 90 TO 95 %, 500 h.	① CONTACT RESISTANCE: 250 mΩ MAX. ② INSULATION RESISTANCE: 1 MΩ MIN. (AT HIGH HUMIDITY) ③ INSULATION RESISTANCE: 10 MΩ MIN. (AT DRY) ④ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	○	—
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55±3 → 5 TO 35 → 85±2 → 5 TO 35°C TIME 30 TO 35→5 MAX→30 TO 35→5 MAX min UNDER 5 CYCLES.	① CONTACT RESISTANCE: 250 mΩ MAX. ② INSULATION RESISTANCE: 100 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	○	—
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	① CONTACT RESISTANCE: 250 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS.	○	—

REMARKS FOR REFERENCE ONLY Subject to change without notice Unless otherwise specified, refer to JIS C 5402.	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	<i>J. Kamarya</i>	<i>J. Kamarya</i>	<i>J. Watanabe</i>	<i>H. Miura</i>	
	99.1.13	99.1.13	99.1.14	99.1.14	


Note QT:Qualification Test AT:Assurance Test ○:Applicable Test		PART NO.	
HRS HIROSE ELECTRIC CO., LTD.	SPECIFICATION SHEET		TM18R - 88
CODE NO.(OLD) CL	DRAWING NO. ELC4 - 121627	CODE NO. CL 222 - 2867 - 2	1/1

TO
Q2
CHN



NO.	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

RECOMMENDED PCB PATTERN, MOUNTING SIDE (4:1)
t=1


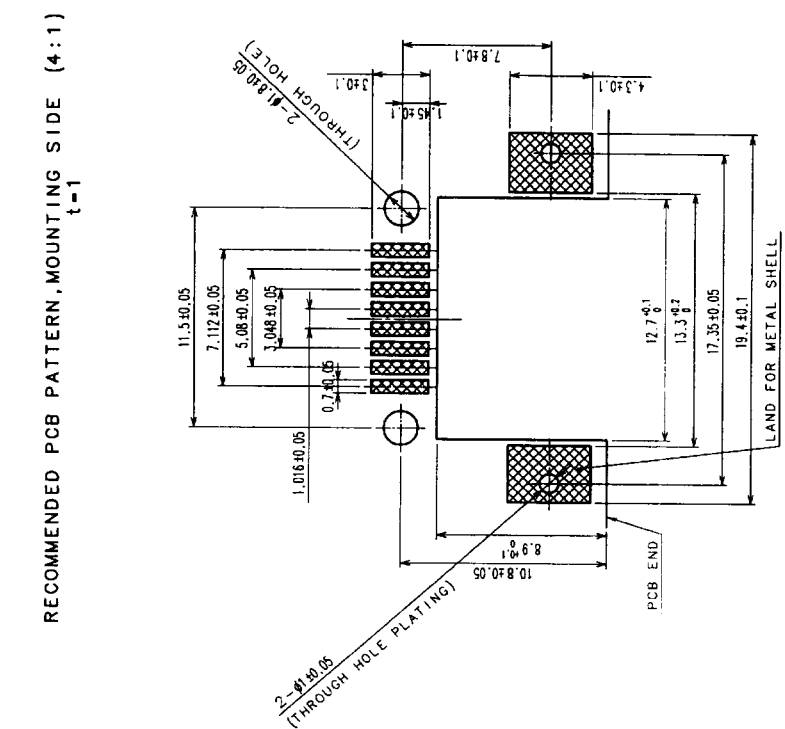


NOTE 1 THE CO-PLANARITY OF LEADS AND METAL SHELLS SHALL BE 0.38mm.

2	PHOSPHOR BRONZE	SOCKET CONTACTS	1.27mm	3	COPPER ALLOY	TIN-LEAD	PLATING
1	PPS	BLACK	UL94V-0	NO.	MATERIAL	FINISH	REMARKS
CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
		J. Kamegaya	S. Kamegaya	T. Matsuda	K. Muro	5.6.88	USA
		99.1.13	99.1.13	99.1.14	99.1.14		
DRAWING NO.		PART NO.					
EDC3-121627		TM18R-88					
SCALE		CODE NO.					
2:1		CL222-2867-2					
UNITS		FORM NO.					
mm		8 FORM NO. 229					

FOR REFERENCE ONLY
Subject to change without notice

PLUG MATED

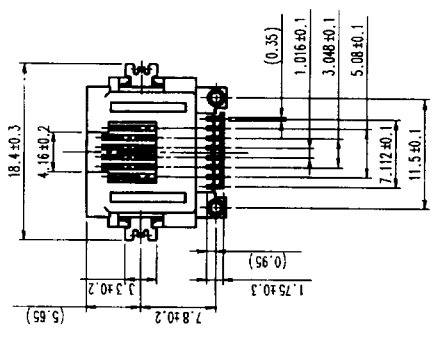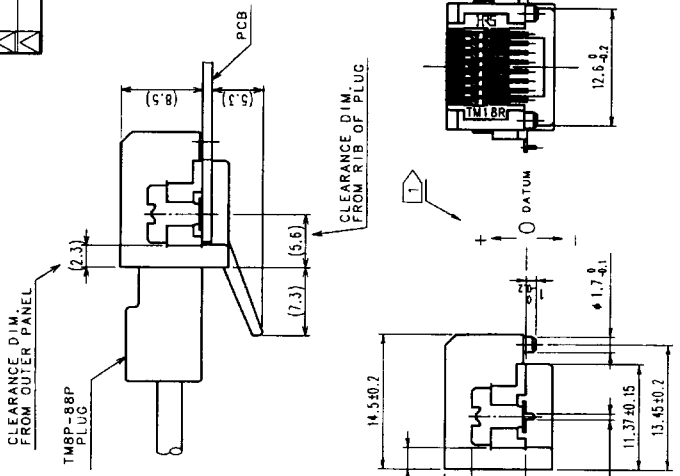

TO	
Q2	