



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Solid Tantalum Surface Mount Chip Capacitors TANTAMOUNT™, Molded Case, for Medical Instruments



PERFORMANCE / ELECTRICAL CHARACTERISTICS

www.vishay.com/doc?40209

Operating Temperature: -55 °C to +125 °C
(above 85 °C, voltage derating is required)

Capacitance Range: 1 µF to 220 µF

Capacitance Tolerance: ± 10 %, ± 20 % standard

Voltage Rating: 4 V_{DC} to 20 V_{DC}

FEATURES

- **For non-life support medical applications**
- High reliability
- Weibull grading options
- DC leakage at 0.005 CV
- 100 % surge current tested (B, C, D, E cases)
- Terminations: 100 % matte tin and tin / lead
- Standard EIA 535BAAC case sizes (A through E)
- Manufacturing location is certified to medical standard ISO 13485
- Compliant terminations
- Dry pack as per IPC / JEDEC® J-STD-033 standard
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS*
Available

HALOGEN FREE
GREEN
(5-2008)
Available


Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details.

| ORDERING INFORMATION | | | | | | | |
|----------------------|-----------------------------------|--|--------------------------|--|---|--|---|
| TM3 | C | 226 | K | 6R3 | C | B | A |
| TYPE | CASE CODE | CAPACITANCE | CAPACITANCE TOLERANCE | DC VOLTAGE RATING AT +85 °C | TERMINATION AND PACKAGING | RELIABILITY LEVEL | SURGE CURRENT |
| | See Ratings and Case Codes table. | This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow. | K = ± 10 % M = ± 20 % | This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V). | Matte tin C = 7" (178 mm) reel H = 7" (178 mm) ½ reel V = 7" (178 mm) reel, dry pack Tin / lead E = 7" (178 mm) reel L = 7" (178 mm) ½ reel T = 7" (178 mm) reel, dry pack | B = 0.1 % Weibull FRL S = hi-rel std. (40 h burn-in) Z = non-established reliability | A = 10 cycles at +25 °C, 1.1 RV Z = no surge (for A case only) |

Note

- Dry pack as specified in J-STD-033 for MSL3. Applicable for D and E cases only.

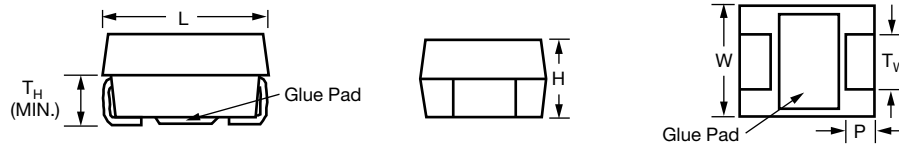DIMENSIONS in inches (millimeters)


| CASE CODE | EIA SIZE | L | W | H | P | T _W | T _H (MIN.) |
|-----------|----------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|-------------------------------|-----------------------|
| A | 3216-18 | 0.126 ± 0.008 [3.2 ± 0.20] | 0.063 ± 0.008 [1.6 ± 0.20] | 0.063 ± 0.008 [1.6 ± 0.20] | 0.031 ± 0.012 [0.80 ± 0.30] | 0.047 ± 0.004 [1.2 ± 0.10] | 0.028 [0.70] |
| B | 3528-21 | 0.138 ± 0.008 [3.5 ± 0.20] | 0.110 ± 0.008 [2.8 ± 0.20] | 0.075 ± 0.008 [1.9 ± 0.20] | 0.031 ± 0.012 [0.80 ± 0.30] | 0.087 ± 0.004 [2.2 ± 0.10] | 0.028 [0.70] |
| C | 6032-28 | 0.236 ± 0.012 [6.0 ± 0.30] | 0.126 ± 0.012 [3.2 ± 0.30] | 0.098 ± 0.012 [2.5 ± 0.30] | 0.051 ± 0.012 [1.3 ± 0.30] | 0.087 ± 0.004 [2.2 ± 0.10] | 0.039 [1.0] |
| D | 7343-31 | 0.287 ± 0.012 [7.3 ± 0.30] | 0.169 ± 0.012 [4.3 ± 0.30] | 0.110 ± 0.012 [2.8 ± 0.30] | 0.051 ± 0.012 [1.3 ± 0.30] | 0.094 ± 0.004 [2.4 ± 0.10] | 0.039 [1.0] |
| E | 7343-43 | 0.287 ± 0.012 [7.3 ± 0.30] | 0.169 ± 0.012 [4.3 ± 0.30] | 0.157 ± 0.012 [4.0 ± 0.30] | 0.051 ± 0.012 [1.3 ± 0.30] | 0.094 ± 0.004 [2.4 ± 0.10] | 0.039 [1.0] |

Note

- Glue pad (non-conductive, part of molded case) is dedicated for glue attachment (as user option).

RATINGS AND CASE CODES

| μF | 4 V | 6.3 V | 10 V | 16 V | 20 V |
|-----|-----|-------|-------|-------|------|
| 1.0 | | | | A | |
| 1.5 | | | A | A | |
| 2.2 | | A | A | A/B | B |
| 3.3 | | A | A | A/B | B |
| 4.7 | | | A/B | A/B | C |
| 6.8 | | B | B | B | B/C |
| 10 | | A/B | A/B | B/C | C |
| 15 | | | B/C | B/C | |
| 22 | | A/B/C | B/C | B/C/D | C/D |
| 33 | | B | B/C/D | D | D |
| 47 | | B/C/D | C/D | C/D | E |
| 68 | B | D | D | D | |
| 100 | D | D | D | D/E | |
| 150 | D | D | | | |
| 220 | D/E | D/E | E | | |

MARKING

| <p>A Case</p> | "A" CASE VOLTAGE CODE | | <p>B, C, D, E Cases</p> |
|----------------------|-----------------------|------|--------------------------------|
| | VOLTS | CODE | |
| | 4.0 | G | |
| | 6.3 | J | |
| | 10 | A | |
| | 16 | C | |
| | 20 | D | |
| | 25 | E | |
| | 35 | V | |
| | 50 | T | |

Marking

Capacitor marking includes an anode (+) polarity band, capacitance in microfarads and the voltage rating. "A" case capacitors use a letter code for the voltage and EIA capacitance code.

The Vishay identification is included if space permits. Capacitors rated at 6.3 V are marked 6 V.

A manufacturing date code is marked on all capacitors, for details see FAQ: www.vishay.com/doc?40110.

Call the factory for further explanation.



| STANDARD RATINGS | | | | | | |
|--|-----------|----------------------|-------------------------------------|---------------------------------------|--|--|
| CAPACITANCE (μ F) | CASE CODE | PART NUMBER | MAX. DCL AT +25 °C (μ A) | MAX. DF AT +25 °C 120 Hz (%) | MAX. ESR AT +25 °C 100 kHz (Ω) | MAX. RIPPLE 100 kHz I_{RMS} (A) |
| 4 V_{DC} AT +85 °C; 2.7 V_{DC} AT +125 °C | | | | | | |
| 68 | B | TM3B686(1)004(2)(3)A | 1.36 | 6 | 1.90 | 0.21 |
| 100 | D | TM3D107(1)004(4)(3)A | 2.00 | 6 | 0.70 | 0.46 |
| 150 | D | TM3D157(1)004(4)(3)A | 3.00 | 8 | 0.60 | 0.50 |
| 220 | D | TM3D227(1)004(4)(3)A | 4.40 | 8 | 0.60 | 0.50 |
| 220 | E | TM3E227(1)004(4)(3)A | 4.40 | 8 | 0.50 | 0.57 |
| 6.3 V_{DC} AT +85 °C; 4 V_{DC} AT +125 °C | | | | | | |
| 2.2 | A | TM3A225(1)6R3(2)(3)Z | 0.25 | 6 | 7.60 | 0.10 |
| 3.3 | A | TM3A335(1)6R3(2)(3)Z | 0.25 | 6 | 6.30 | 0.11 |
| 6.8 | B | TM3B685(1)6R3(2)(3)A | 0.25 | 6 | 3.40 | 0.16 |
| 10 | A | TM3A106(1)6R3(2)(3)Z | 0.32 | 6 | 3.40 | 0.15 |
| 10 | B | TM3B106(1)6R3(2)(3)A | 0.30 | 6 | 2.90 | 0.17 |
| 22 | A | TM3A226(1)6R3(2)(3)Z | 0.66 | 6 | 2.90 | 0.16 |
| 22 | B | TM3B226(1)6R3(2)(3)A | 0.69 | 6 | 2.00 | 0.21 |
| 22 | C | TM3C226(1)6R3(2)(3)A | 0.66 | 6 | 1.80 | 0.25 |
| 33 | B | TM3B336(1)6R3(2)(3)A | 0.99 | 6 | 1.90 | 0.21 |
| 47 | B | TM3B476(1)6R3(2)(3)A | 1.41 | 6 | 1.90 | 0.21 |
| 47 | C | TM3C476(1)6R3(2)(3)A | 1.41 | 6 | 1.40 | 0.28 |
| 47 | D | TM3D476(1)6R3(4)(3)A | 1.41 | 6 | 0.80 | 0.43 |
| 68 | D | TM3D686(1)6R3(4)(3)A | 2.04 | 6 | 0.70 | 0.46 |
| 100 | D | TM3D107(1)6R3(4)(3)A | 3.00 | 6 | 0.14 | 1.04 |
| 150 | D | TM3D157(1)6R3(4)(3)A | 4.50 | 8 | 0.60 | 0.50 |
| 220 | D | TM3D227(1)6R3(4)(3)A | 6.60 | 8 | 0.60 | 0.50 |
| 220 | E | TM3E227(1)6R3(4)(3)A | 6.60 | 8 | 0.50 | 0.57 |
| 10 V_{DC} AT +85 °C; 7 V_{DC} AT +125 °C | | | | | | |
| 1.5 | A | TM3A155(1)010(2)(3)Z | 0.25 | 6 | 8.00 | 0.10 |
| 2.2 | A | TM3A225(1)010(2)(3)Z | 0.25 | 6 | 6.30 | 0.11 |
| 3.3 | A | TM3A335(1)010(2)(3)Z | 0.25 | 6 | 5.50 | 0.12 |
| 4.7 | A | TM3A475(1)010(2)(3)Z | 0.25 | 6 | 5.00 | 0.12 |
| 4.7 | B | TM3B475(1)010(2)(3)A | 0.25 | 6 | 3.40 | 0.16 |
| 6.8 | B | TM3B685(1)010(2)(3)A | 0.34 | 6 | 2.90 | 0.17 |
| 10 | A | TM3A106(1)010(2)(3)Z | 0.50 | 6 | 3.40 | 0.15 |
| 10 | B | TM3B106(1)010(2)(3)A | 0.50 | 6 | 2.50 | 0.18 |
| 15 | B | TM3B156(1)010(2)(3)A | 0.75 | 6 | 2.00 | 0.21 |
| 15 | C | TM3C156(1)010(2)(3)A | 0.75 | 6 | 1.80 | 0.25 |
| 22 | B | TM3B226(1)010(2)(3)A | 1.10 | 6 | 1.90 | 0.21 |
| 22 | C | TM3C226(1)010(2)(3)A | 1.10 | 6 | 0.35 | 0.56 |
| 33 | B | TM3B336(1)010(2)(3)A | 1.65 | 6 | 1.90 | 0.21 |
| 33 | C | TM3C336(1)010(2)(3)A | 1.65 | 6 | 1.40 | 0.28 |
| 33 | D | TM3D336(1)010(4)(3)A | 1.65 | 6 | 0.80 | 0.43 |
| 47 | C | TM3C476(1)010(2)(3)A | 2.35 | 6 | 1.10 | 0.32 |
| 47 | D | TM3D476(1)010(4)(3)A | 2.35 | 6 | 0.70 | 0.46 |
| 68 | D | TM3D686(1)010(4)(3)A | 3.40 | 6 | 0.70 | 0.46 |
| 100 | D | TM3D107(1)010(4)(3)A | 5.00 | 6 | 0.60 | 0.50 |
| 220 | E | TM3E227(1)010(4)(3)A | 11.00 | 8 | 0.50 | 0.57 |

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, H, L
 - Reliability level: B, S, Z
 - Termination and packaging: C, E, H, L, V, T



| STANDARD RATINGS | | | | | | |
|--|-----------|----------------------|-------------------------------------|---------------------------------------|--|--|
| CAPACITANCE (μ F) | CASE CODE | PART NUMBER | MAX. DCL AT +25 °C (μ A) | MAX. DF AT +25 °C 120 Hz (%) | MAX. ESR AT +25 °C 100 kHz (Ω) | MAX. RIPPLE 100 kHz I_{RMS} (A) |
| 16 V_{DC} AT +85 °C; 10 V_{DC} AT +125 °C | | | | | | |
| 1.0 | A | TM3A105(1)016(2)(3)Z | 0.25 | 4 | 9.30 | 0.09 |
| 1.5 | A | TM3A155(1)016(2)(3)Z | 0.25 | 6 | 6.70 | 0.11 |
| 2.2 | A | TM3A225(1)016(2)(3)Z | 0.25 | 6 | 4.00 | 11.00 |
| 2.2 | B | TM3B225(1)016(2)(3)A | 0.25 | 6 | 4.60 | 0.14 |
| 3.3 | A | TM3A335(1)016(2)(3)Z | 0.26 | 6 | 3.50 | 0.15 |
| 3.3 | B | TM3B335(1)016(2)(3)A | 0.26 | 6 | 3.50 | 0.16 |
| 4.7 | A | TM3A475(1)016(2)(3)Z | 0.38 | 6 | 5.00 | 0.12 |
| 4.7 | B | TM3B475(1)016(2)(3)A | 0.38 | 6 | 2.90 | 0.17 |
| 6.8 | B | TM3B685(1)016(2)(3)A | 0.54 | 6 | 2.50 | 0.18 |
| 10 | B | TM3B106(1)016(2)(3)A | 0.80 | 6 | 2.00 | 0.21 |
| 10 | C | TM3C106(1)016(2)(3)A | 0.80 | 6 | 1.80 | 0.25 |
| 15 | B | TM3B156(1)016(2)(3)A | 1.20 | 6 | 2.00 | 0.21 |
| 15 | C | TM3C156(1)016(2)(3)A | 1.20 | 6 | 0.40 | 0.52 |
| 22 | B | TM3B226(1)016(2)(3)A | 1.76 | 6 | 1.90 | 0.21 |
| 22 | C | TM3C226(1)016(2)(3)A | 1.76 | 6 | 1.40 | 0.28 |
| 22 | D | TM3D226(1)016(4)(3)A | 1.76 | 6 | 0.80 | 0.43 |
| 33 | D | TM3D336(1)016(4)(3)A | 2.64 | 6 | 0.70 | 0.46 |
| 47 | C | TM3C476(1)016(2)(3)A | 3.76 | 6 | 1.00 | 0.33 |
| 47 | D | TM3D476(1)016(4)(3)A | 3.76 | 6 | 0.70 | 0.46 |
| 68 | D | TM3D686(1)016(4)(3)A | 5.44 | 6 | 0.60 | 0.50 |
| 100 | D | TM3D107(1)016(4)(3)A | 8.00 | 8 | 0.60 | 0.50 |
| 100 | E | TM3E107(1)016(4)(3)A | 8.00 | 8 | 0.60 | 0.52 |
| 20 V_{DC} AT +85 °C; 13 V_{DC} AT +125 °C | | | | | | |
| 2.2 | B | TM3B225(1)020(2)(3)A | 0.25 | 6 | 3.50 | 0.16 |
| 3.3 | B | TM3B335(1)020(2)(3)A | 0.33 | 6 | 3.00 | 0.17 |
| 4.7 | C | TM3C475(1)020(2)(3)A | 0.47 | 6 | 2.30 | 0.22 |
| 6.8 | B | TM3B685(1)020(2)(3)A | 0.68 | 6 | 2.50 | 0.18 |
| 6.8 | C | TM3C685(1)020(2)(3)A | 0.68 | 6 | 1.90 | 0.24 |
| 10 | C | TM3C106(1)020(2)(3)A | 1.00 | 6 | 1.70 | 0.25 |
| 22 | C | TM3C226(1)020(2)(3)A | 2.20 | 6 | 1.10 | 0.32 |
| 22 | D | TM3D226(1)020(4)(3)A | 2.20 | 6 | 0.70 | 0.46 |
| 33 | D | TM3D336(1)020(4)(3)A | 3.30 | 6 | 0.70 | 0.46 |
| 47 | E | TM3E476(1)020(4)(3)A | 4.70 | 6 | 0.60 | 0.52 |

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, H, L
 - Reliability level: B, S, Z
 - Termination and packaging: C, E, H, L, V, T



| RECOMMENDED VOLTAGE DERATING GUIDELINES (for temperatures below +85 °C) | |
|--|-------------------|
| STANDARD CONDITIONS. FOR EXAMPLE: OUTPUT FILTERS | |
| Capacitor Voltage Rating | Operating Voltage |
| 4.0 | 2.5 |
| 6.3 | 3.3 |
| 10 | 5.0 |
| 16 | 8.0 |
| 20 | 10 |
| SEVERE CONDITIONS. FOR EXAMPLE: INPUT FILTERS | |
| Capacitor Voltage Rating | Operating Voltage |
| 4.0 | 2.5 |
| 6.3 | 3.6 |
| 10 | 6.0 |
| 16 | 10 |
| 20 | 12 |

| POWER DISSIPATION | |
|--------------------------|---|
| CASE CODE | MAXIMUM PERMISSIBLE POWER DISSIPATION AT +25 °C (W) IN FREE AIR |
| A | 0.075 |
| B | 0.085 |
| C | 0.110 |
| D | 0.150 |
| E | 0.165 |

| STANDARD PACKAGING QUANTITY | | |
|------------------------------------|----------------|--------------|
| CASE CODE | UNITS PER REEL | |
| | 7" FULL REEL | 7" HALF REEL |
| A | 2000 | 1000 |
| B | 2000 | 1000 |
| C | 500 | 250 |
| D | 500 | 250 |
| E | 400 | 200 |

| PRODUCT INFORMATION | |
|--------------------------------------|--|
| Guide for Molded Tantalum Capacitors | www.vishay.com/doc?40074 |
| Pad Dimensions | |
| Packaging Dimensions | |
| Moisture Sensitivity | www.vishay.com/doc?40135 |
| SELECTOR GUIDES | |
| Solid Tantalum Selector Guide | www.vishay.com/doc?49053 |
| Solid Tantalum Chip Capacitors | www.vishay.com/doc?40091 |
| FAQ | |
| Frequently Asked Questions | www.vishay.com/doc?40110 |



COTS Tantalum Capacitors


| ELECTRICAL PERFORMANCE CHARACTERISTICS | | | | |
|--|---|--------------------------|-----------------------------|--------------------------|
| ITEM | PERFORMANCE CHARACTERISTICS | | | |
| Category temperature range | -55 °C to +85 °C (to +125 °C with voltage derating) | | | |
| Capacitance tolerance | ± 20 %, ± 10 %, tested via bridge method, at 25 °C, 120 Hz | | | |
| Dissipation factor | Limit per Standard Ratings table. Tested via bridge method, at 25 °C, 120 Hz | | | |
| ESR | Limit per Standard Ratings table. Tested via bridge method, at 25 °C, 100 kHz | | | |
| Leakage current | After application of rated voltage applied to capacitors for 5 min using a steady source of power with 1 kΩ resistor in series with the capacitor under test, leakage current at 25 °C is not more than 0.01 CV or 0.5 μA, whichever is greater. <i>Note that the leakage current varies with temperature and applied voltage. See graph below for the appropriate adjustment factor.</i> | | | |
| Capacitance change by temperature | +15 % max. (at +125 °C) +10 % max. (at +85 °C) -10 % max. (at -55 °C) | | | |
| Reverse voltage | Capacitors are capable of withstanding peak voltages in the reverse direction equal to: 10 % of the DC rating at +25 °C 5 % of the DC rating at +85 °C 1 % of the DC rating at +125 °C Vishay does not recommend intentional or repetitive application of reverse voltage. | | | |
| Ripple current | For maximum ripple current values (at 25 °C) refer to relevant datasheet. If capacitors are to be used at temperatures above +25 °C, the permissible RMS ripple current (or voltage) shall be calculated using the derating factors: 1.0 at +25 °C 0.9 at +85 °C 0.4 at +125 °C | | | |
| Maximum operating and surge voltages vs. temperature | +85 °C | | +125 °C | |
| | RATED VOLTAGE (V) | SURGE VOLTAGE (V) | CATEGORY VOLTAGE (V) | SURGE VOLTAGE (V) |
| | 4.0 | 5.2 | 2.7 | 3.4 |
| | 6.3 | 8.0 | 4.0 | 5.0 |
| | 10 | 13 | 7.0 | 8.0 |
| | 16 | 20 | 10 | 12 |
| | 20 | 26 | 13 | 16 |
| | 25 | 32 | 17 | 20 |
| | 35 | 46 | 23 | 28 |
| | 40 | 52 | 26 | 31 |
| | 50 | 65 | 33 | 40 |
| | 50 ⁽¹⁾ | 60 | 33 | 40 |
| | 63 | 75 | 42 | 50 |
| 75 | 75 | 50 | 50 | |

Notes

- All information presented in this document reflects typical performance characteristics
- ⁽¹⁾ Capacitance value 15 μF and higher



TYPICAL LEAKAGE CURRENT - TEMPERATURE FACTOR

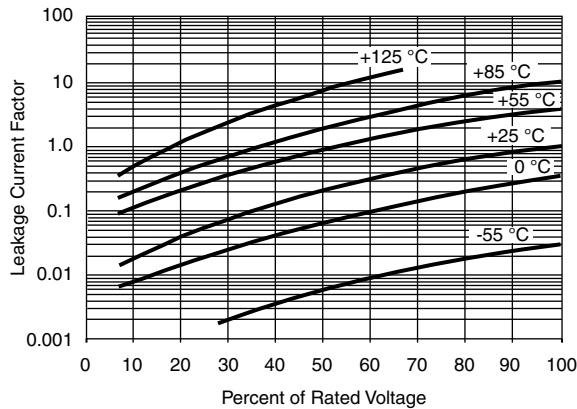

Notes

- At +25 °C, the leakage current shall not exceed the value listed in the Standard Ratings table.
- At +85 °C, the leakage current shall not exceed 10 times the value listed in the Standard Ratings table.
- At +125 °C, the leakage current shall not exceed 12 times the value listed in the Standard Ratings table.

ENVIRONMENTAL PERFORMANCE CHARACTERISTICS

| ITEM | CONDITION | POST TEST PERFORMANCE | |
|--|---|---|--|
| Surge voltage | MIL-PRF-55365 1000 successive test cycles at 85 °C of surge voltage (as specified in the table above), in series with a 33 Ω resistor at the rate of 30 s ON, 30 s OFF | Capacitance change Dissipation factor Leakage current | Within ± 10 % of initial value Initial specified limit Initial specified limit |
| Life test at +85 °C | MIL-STD-202, method 108 1000 h application of rated voltage at 85 °C | Capacitance change Dissipation factor Leakage current | Within ± 10 % of initial value Initial specified limit Shall not exceed 125 % of initial limit |
| Life test at +125 °C | MIL-STD-202, method 108 1000 h application 2/3 of rated voltage at 125 °C | Capacitance change Dissipation factor Leakage current | Within ± 10 % of initial value Initial specified limit Shall not exceed 125 % of initial limit |
| Moisture resistance | MIL-STD-202, method 106 at rated voltage, 20 cycles | Capacitance change Dissipation factor Leakage current | Within ± 15 % of initial value Shall not exceed 150 % of initial limit Shall not exceed 200 % of initial limit |
| Stability at low and high temperatures | MIL-PRF-55365 | Delta cap limit at -55 °C, 85 °C is ± 10 % of initial value Delta cap limit at 125 °C is ± 15 % of initial value Delta cap at step 3 and final step 25 °C is ± 10 % DCL at 85 °C: 10 x initial specified value DCL at 125 °C: 12 x initial specified value DCL at 25 °C: initial specified value at RV | |
| Thermal shock | MIL-STD-202, method 107 At -55 °C / +125 °C, for 5 cycles, 30 min at each temperature | Capacitance change Dissipation factor Leakage current | Within ± 10 % of initial value Initial specified limit Initial specified limit |



| MECHANICAL PERFORMANCE CHARACTERISTICS | | |
|--|---|---|
| ITEM | CONDITION | POST TEST PERFORMANCE |
| Terminal strength / Shear force test | Apply a pressure load of 5 N for 10 s ± 1 s horizontally to the center of capacitor side body | Capacitance change Within ± 10 % of initial value Dissipation factor Initial specified limit Leakage current Initial specified limit There shall be no mechanical or visual damage to capacitors post-conditioning. |
| Vibration | MIL-STD-202, method 204, condition D, 10 Hz to 2000 Hz, 20 g peak, 8 h, at rated voltage | Electrical measurements are not applicable, since the same parts are used for shock (specified pulse) test. There shall be no mechanical or visual damage to capacitors post-conditioning. |
| Shock (specified pulse) | MIL-STD-202, method 213, condition I, 100 g peak | Capacitance change Within ± 10 % of initial value Dissipation factor Initial specified limit Leakage current Initial specified limit There shall be no mechanical or visual damage to capacitors post-conditioning. |
| Resistance to soldering heat | MIL-STD-202, method 210, condition J (leadbearing capacitors) and K (lead (Pb)-free capacitors), one heat cycle | Capacitance change Within ± 10 % of initial value Dissipation factor Initial specified limit Leakage current Initial specified limit |
| Solderability | MIL-STD-202, method 208, ANSI/J-STD-002, test B (leadbearing) and B1 (lead (Pb)-free). Preconditioning per category C (category E - optional). Does not apply to gold terminations. Lead (Pb)-free and leadbearing capacitors are backward and forward compatible | Solder coating of all capacitors shall meet specified requirements. There shall be no mechanical or visual damage to capacitors post-conditioning. |
| Resistance to solvents | MIL-STD-202, method 215 | There shall be no mechanical or visual damage to capacitors post-conditioning. Body marking shall remain legible. |
| Flammability | Encapsulation materials meet UL 94 V-0 with an oxygen index of 32 % | |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.