

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











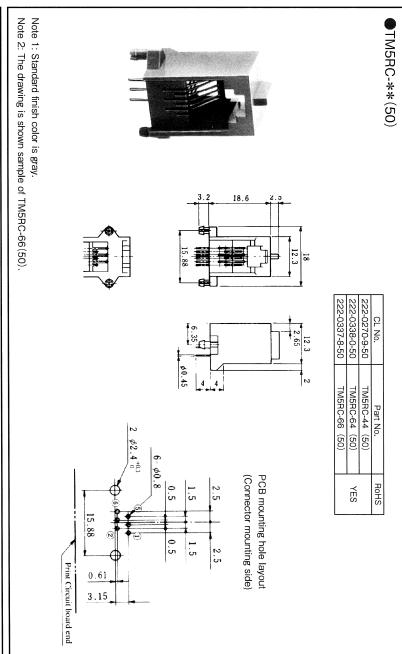

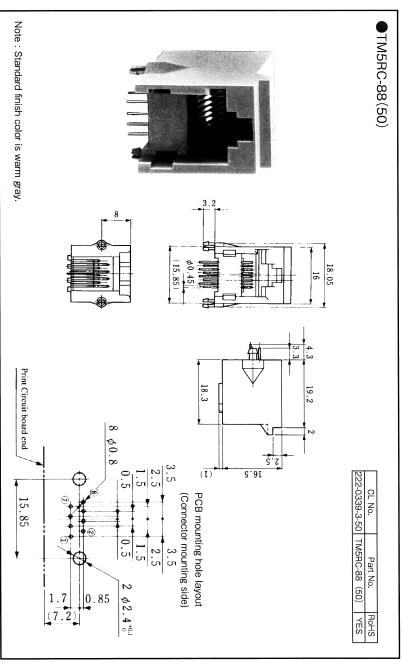


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information. All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

222

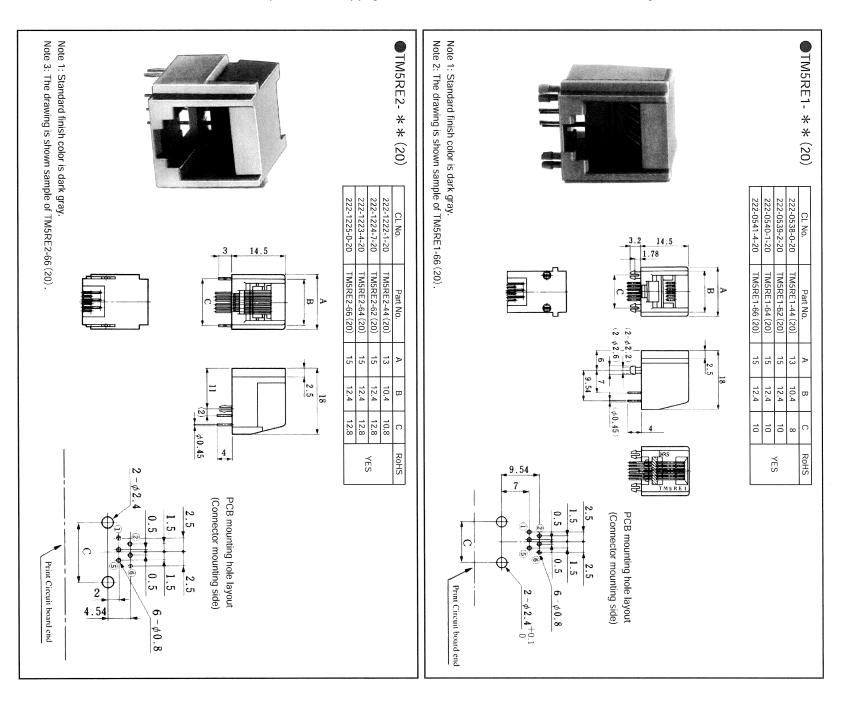


2 222 =

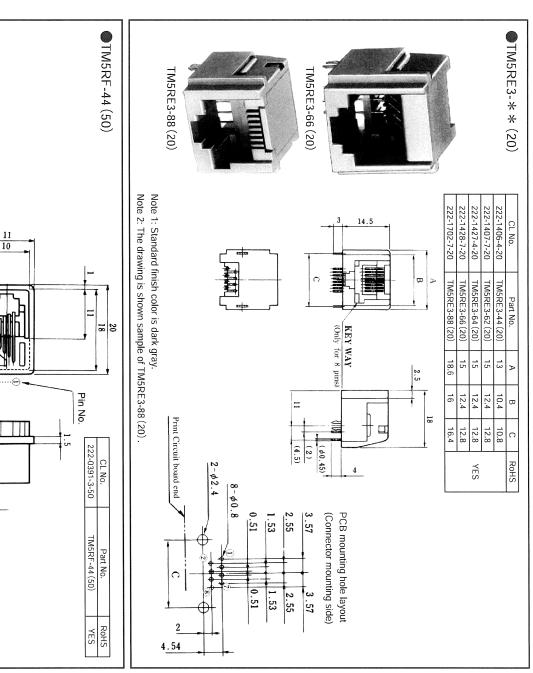


 $\phi 2.4 + 0.1$


CL 222 TM

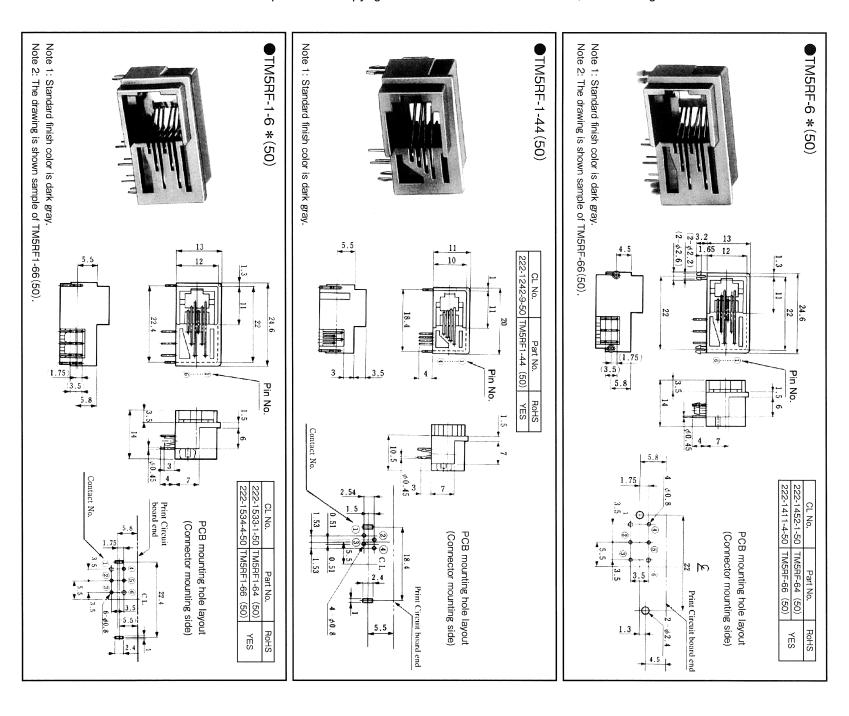



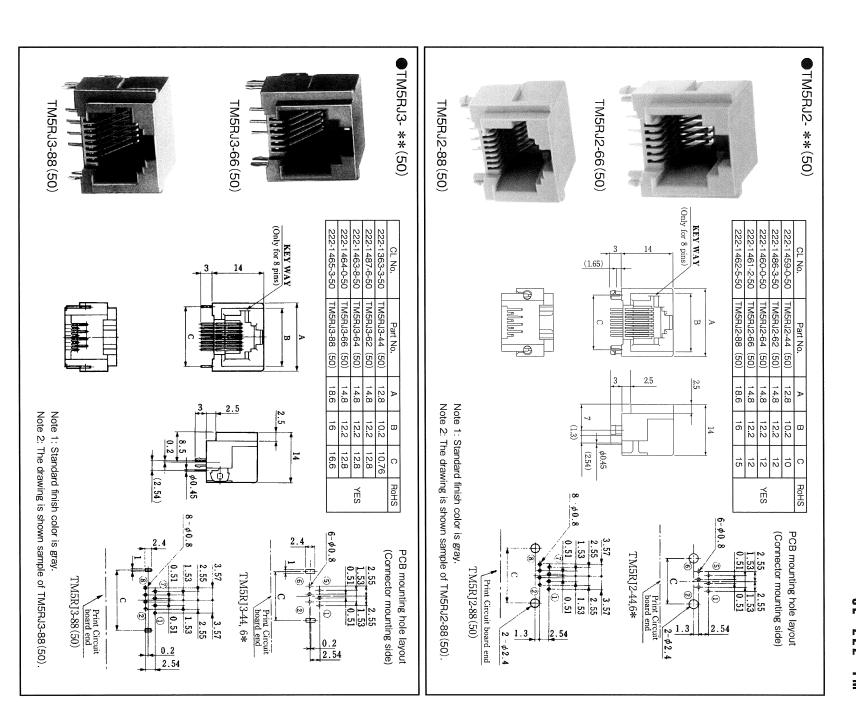




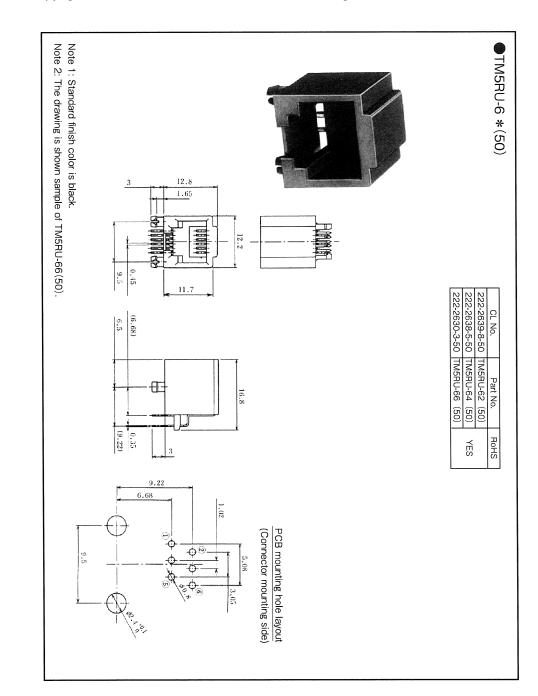


CL 222 TM

Gang-Jacks Right Angle Dip Type

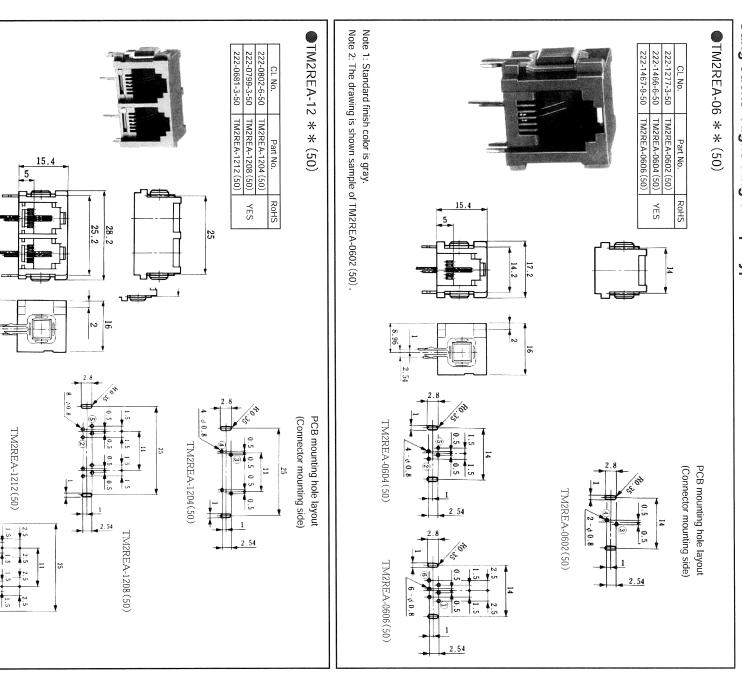


Note 1: Standard finish color is gray. Note 2: The drawing is shown sample of TM2REA-1204 (50).


CL 222 TM

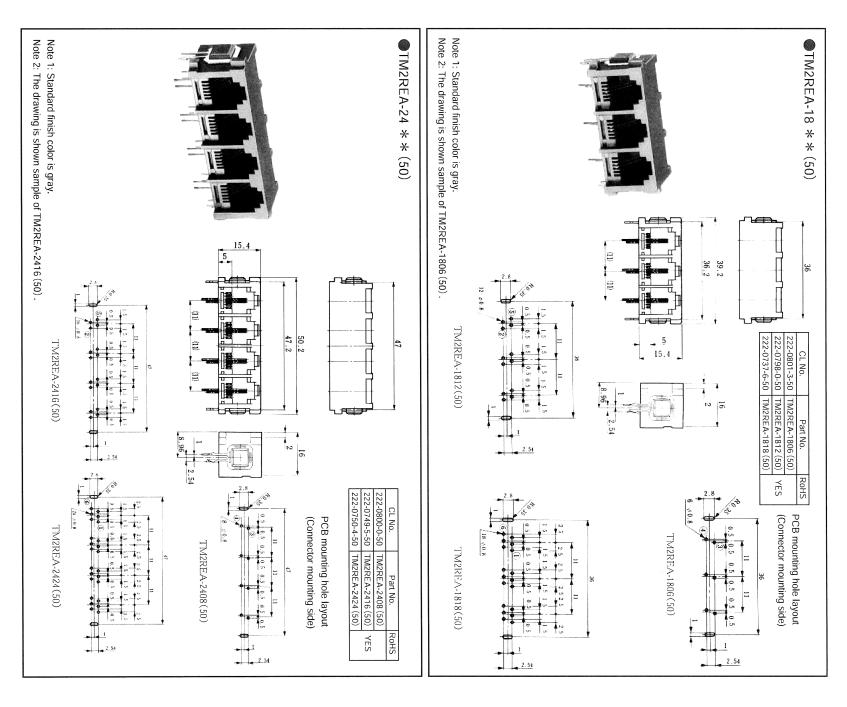

CL 222 TM

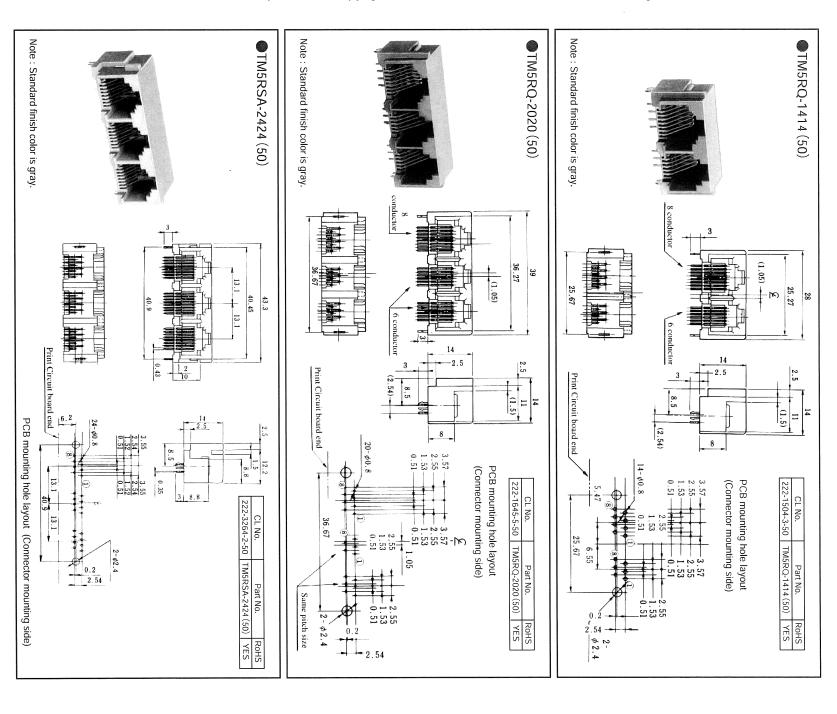



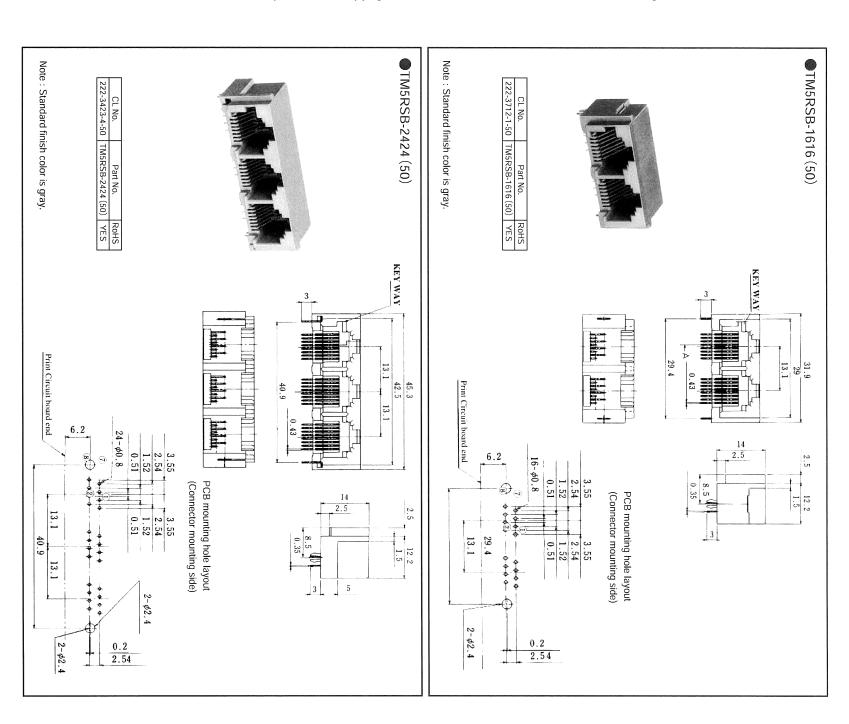

222

EIGHT-CONDUCTOR LOW PROFILE JACKS

GENERAL


than our former models to meet the demand for smaller and thinner electronic equipment. The TM5RL Series are small 8-contact modular connectors designed to be 11.7 mm in height and 23% smaller in volume

FEATURES

- (1) 11.7 mm in height above PCB surface (shielded jacks: 11.9 mm)
- 23% smaller in volume than our former models
- (3) (4)Space-saving: 14 mm (14.6 mm) in width and 17 mm (7.6 mm) in depth. (): shielded jacks
- EMI-protected ferrite and shielded jacks available.
- (5) Ferrite and shielded jacks use the same connector body as standard jacks, requiring no change in the PCB for redesigning. (When you plan to redesign a standard PCB to a shielded PCB, select the shielding pattern in advance).
- \Im 6A quadruple jack is equal to or smaller in size than four TM5RL-88 jacks combined.
- Plugs and jack connectors comply with the ISO 8877 Standard (ISDN interface connector).


LAN boards, HUB, ISDN terminals, and personal computers.

APPLICATIONS

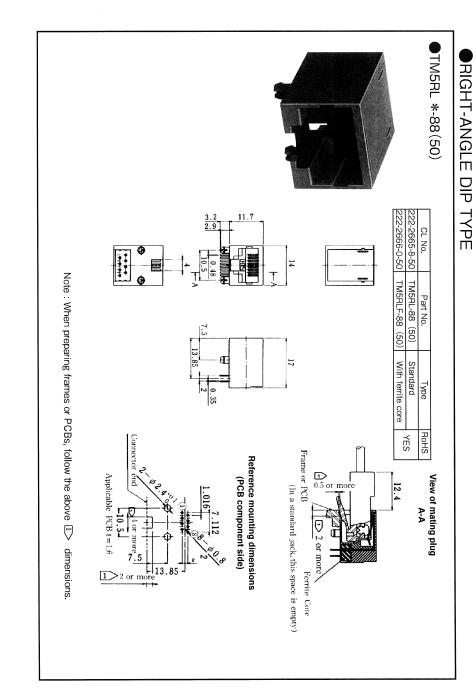

222 =

Quadruplet right-angle dip

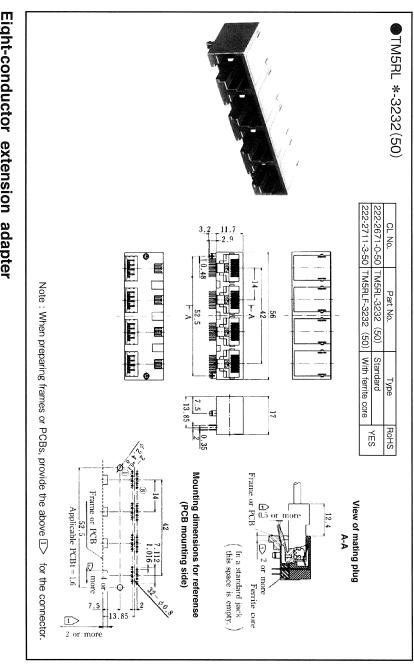

Eight-conductor extension adapter

