



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Features

- ◆ Fully encapsulated low profile plastic casing in PCB- or chassis mount version
- ◆ 2 x MOPP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- ◆ IT and industrial safety according to IEC/UL 60950-1 and UL 508
- ◆ Ready to meet ErP directive <0.5 W no load power consumption
- ◆ -40°C start-up temperature
- ◆ Safety class II prepared
- ◆ Protection against over-temperature overload and short circuit
- ◆ 3-year product warranty

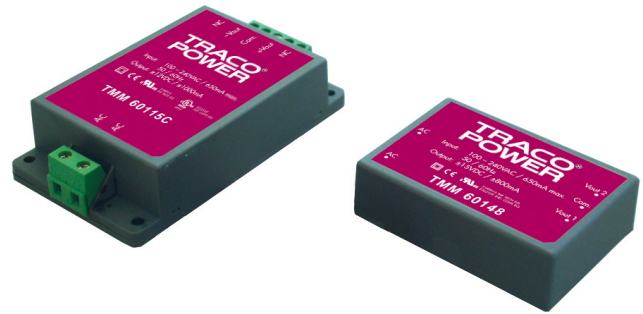

The TMM 60 Series of fully encapsulated 60 Watt AC/DC power supply modules feature a reinforced/double I/O isolation system according to latest medical safety standards 60601-3 3rd edition for 2 x MOPP (Means Of Patient Protection). The high efficiency and the use of highest grade components make the units suitable for an operating temperature range of -40°C to +60°C while it goes up to 75°C with 50% load derating. EMI/EMC characteristics and the safety approval package qualify these modules not only for medical devices but also for demanding applications in transportation systems and for equipment in industrial and commercial environment.

Also see:

TMM 24 Series, 24 Watt

www.tracopower.com/products/tmm24.pdf

TMM 40 Series, 40 Watt

www.tracopower.com/products/tmm40.pdf

Models

Order code		Output power max.	Output	Efficiency
PCB mount	Chassis mount			
TMM 60105	TMM 60105C	60 W	5.1 VDC / 10000 mA	84 %
TMM 60112	TMM 60112C		12 VDC / 5000 mA	87 %
TMM 60115	TMM 60115C		15 VDC / 4000 mA	87 %
TMM 60124	TMM 60124C		24 VDC / 2500 mA	87 %
TMM 60148	TMM 60148C		48 VDC / 1250 mA	88 %

Input Specifications

Input voltage ranges	– nominal	100 – 240 VAC
	– AC input	85 – 264 VAC
	– DC Input	120 – 370 VDC
Input frequency		47 – 440 Hz
Input current at full load (115 VAC / 230 VAC nominal input)	5.1 VDC model:	880 mA / 528 mA typ.
	48 VDC model:	988 mA / 593 mA typ.
	other models:	1000 mA / 600 mA typ
Leakage current		80 µA typ.
No-Load power consumption		<0.5 W
External input fuse required (recommended value)		3 A slow blow type or characteristic C

Output Specifications

Voltage set accuracy		±1% typ. / 2.0 % max.
Minimum load		no minimum load required
Regulation	– Input variation	0.2% typ. / 1.0 % max.
	– Load variation (0-100%)	: 0.5% typ. / 1.0 % max.
Temperature coefficient		0.02 %/K
Ripple and noise (20 MHz bandwidth) (measured with capacitor 0.1µF/50V MLCC and 1µ/50V e-cap)	5.1 VDC model:	3% of Vout [Vp-p] max.
	other models:	1.5% of Vout [Vp-p] max.
Current limitation		above 105 % of rated output current. hiccup, auto recovery
Overvoltage protection by Zener diode (main output only)		120 % of Vout typ.
Short circuit protection		continuous, automatic recovery
Max. capacitive load	5.1 VDC model:	8000 µF
	12 VDC model:	3900 µF
	15 VDC model:	3300 µF
	24 VDC model:	1500 µF
	48 VDC model:	680 µF

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


General Specifications

Temperature ranges	<ul style="list-style-type: none"> – Operating (natural convection cooling 20 LFM) – Power derating above +60°C – Storage (non operating) 	–40°C to +75°C 3.75 %/K –40°C to +95°C
Humidity (non condensing)		95 % rel max.
Altitude during operation		5000 m
Switching frequency (pulse width modulation PWM)		100 kHz typ.
Hold-up time	115 VAC: 20 ms typ. 230 VAC: 80 ms typ.	
Isolation voltage	– Input/Output (reinforced)	4'000 VAC
Isolation resistance	– at 500 VDC	1'000 MOhm
Reliability /calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>125'000 h
EMI / RFI conducted and radiated		EN 55022, class B, FCC part 15, level B EN 55011 class B
Electromagnets compatibility (EMC), immunity	<ul style="list-style-type: none"> – Electrostatic discharge ESD – RF field immunity – Electrical fast transients/burst immunity – Surge – Conducted RF – Magnetic field immunity 	IEC / EN 61000-4-2, 8kV/4kV perf. criteria A IEC / EN 61000-4-3, 10V/m perf. criteria A IEC / EN 61000-4-4, ±2kV perf. criteria A IEC / EN 61000-4-5, ±1kV perf. criteria A IEC / EN 61000-4-6, 10 Vr.m.s perf. criteria A IEC / EN 61000-4-8, 30A/m perf. criteria A
Voltage dip and interruptions according to EN 61000-4-11 reference: 115 VAC / 60Hz		30%, 10ms perf. criteria A 60%, 100ms perf. criteria A 95%, 5000ms perf. criteria B
Protection class II		according IEC/EN 60536
Safety standards		UL 60950-1, IEC/EN 60950-1, IEC/EN 60601-1 3rd edition, 2 x MOPP ANSI/AAMI ES60601-1:2005(R)2012 UL 508 for chassis mount version www.tracopower.com/overview/tmm60
	– Certification documents	
Casing material		plastic resin (UL 94V-0 rated)
Environmental compliance	<ul style="list-style-type: none"> – Reach – RoHS 	www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

DIN-Rail Mounting Kit

Adapter for mounting on DIN-rails as per EN 50022-35 (snap-on mounting)

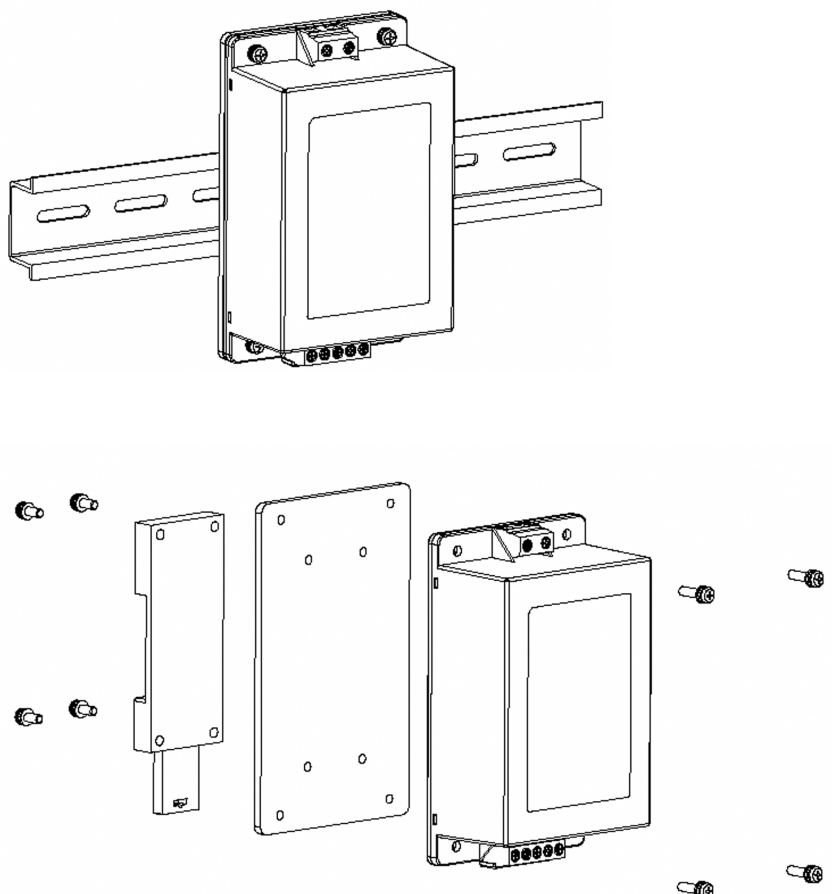

DIN-Rail Mounting Kit

Order code	For models
TMP-MK2	TMM 60xxxC


Kit contains interface plate, DIN-rail clip and necessary screws.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

TMM 60:

for PCB mount:

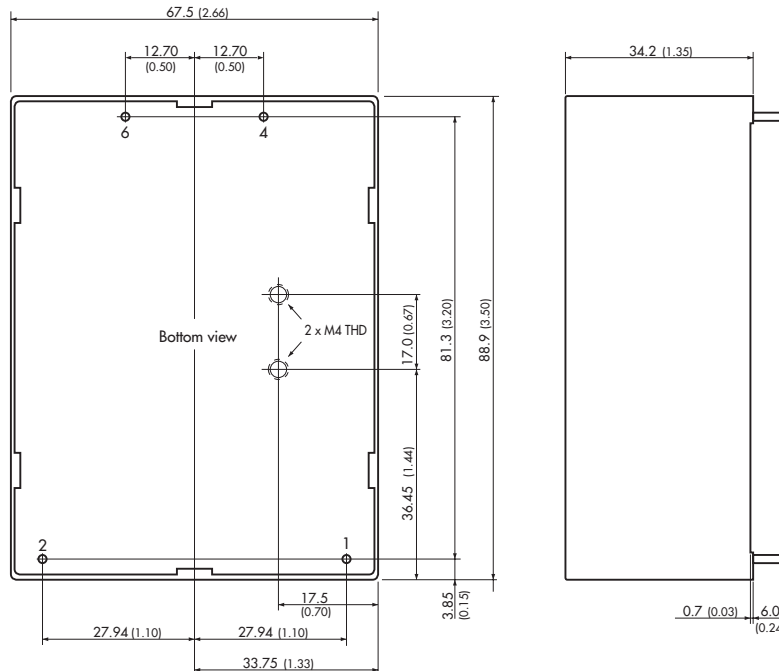


Weight: 360 g (12.70oz)

Pin diameter \varnothing 1.0 mm (0.039)

TMM 60C:

for chassis mount:

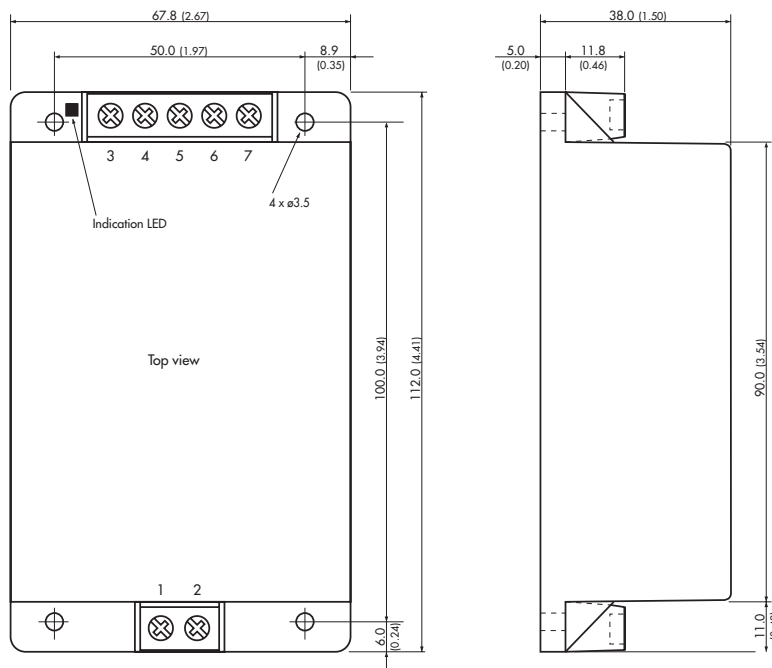

Weight: 380 g (13.4oz)

Pinout / Connection

Pin/con.	Single
1	AC (N)
2	AC (L)
3	No Pin / NC
4	+Vout
5	No Pin / NC
6	-Vout
7	No Pin / NC

NC = not to connect

Dimensions in [mm], () = Inches

Tolerances = ± 1.0 mm (0.04)

Pin diameter $\varnothing \pm 0.1$ mm (0.004)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com