

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









PARAMETERS VALUES UNITS DIRECTIVITY OMNI - SENSITIVTY -42 ± 3 dB STANDARD OPERATING VOLTAGE 2 Vdc MAX OPERATING VOLTAGE 10 Vdc CURRENT CONSUMPTION (MAX) 0.5 mA IMPEDANCE 2.2 KOhm SIGNAL TO NOISE RATIO (MIN.) 60 dB TERMINAL SOLDER PAD -	SPECIFICATIONS				
SENSITIVTY -42 ± 3 dB STANDARD OPERATING VOLTAGE 2 Vdc MAX OPERATING VOLTAGE 10 Vdc CURRENT CONSUMPTION (MAX) 0.5 mA IMPEDANCE 2.2 KOhm SIGNAL TO NOISE RATIO (MIN.) 60 dB	PARAMETERS	VALUES	UNITS		
STANDARD OPERATING VOLTAGE 2 Vdc MAX OPERATING VOLTAGE 10 Vdc CURRENT CONSUMPTION (MAX) 0.5 mA IMPEDANCE 2.2 KOhm SIGNAL TO NOISE RATIO (MIN.) 60 dB	DIRECTIVITY	OMNI	1		
MAX OPERATING VOLTAGE 10 Vdc CURRENT CONSUMPTION (MAX) 0.5 mA IMPEDANCE 2.2 KOhm SIGNAL TO NOISE RATIO (MIN.) 60 dB	SENSITIVTY	-42 ± 3	dB		
CURRENT CONSUMPTION (MAX) 0.5 mA IMPEDANCE 2.2 KOhm SIGNAL TO NOISE RATIO (MIN.) 60 dB	STANDARD OPERATING VOLTAGE	2	Vdc		
IMPEDANCE 2.2 KOhm SIGNAL TO NOISE RATIO (MIN.) 60 dB	MAX OPERATING VOLTAGE	10	Vdc		
SIGNAL TO NOISE RATIO (MIN.) 60 dB	CURRENT CONSUMPTION (MAX)	0.5	mA		
, ,	IMPEDANCE	2.2	KOhm		
TERMINAL SOLDER PAD -	SIGNAL TO NOISE RATIO (MIN.)	60	dB		
	TERMINAL	SOLDER PAD	-		
INTERNAL CAPACITOR N/A pF	INTERNAL CAPACITOR	N/A	pF		


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY						
LTR	DESCRIPTION	DATE	APPROVED			
-	RELEASED FROM ENGINEERING	1/30/2006				
Α	DELETED FELT COVER	11/28/2006	B.R.			
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	8/30/2007	B.R.			

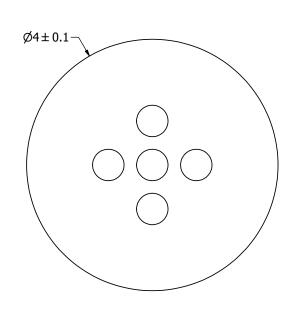

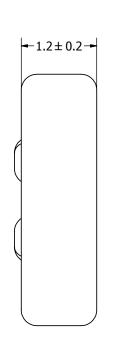

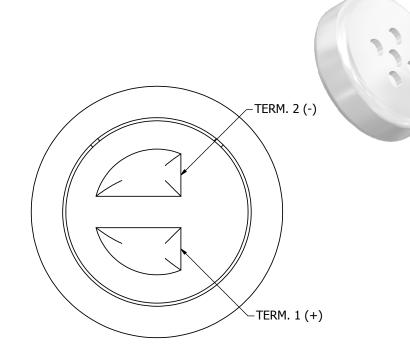

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

	UNLESS OTHERWISE SPECIFIED:	
	DIMENSIONS ARE IN	SIZE
	MILLIMETERS,	
	TOLERANCES	Δα
	ARE ±0.5 AND ANGLES ARE ±3°.	7
TOM-1242L-NF-R.id		

J.A.F.	1/30/2006	E	
	pul.		
	a projects unlimited co	nc	

Designed by

 Checked by
 Date
 Approved by
 Date
 Drawn Date

 E.P.
 1/31/2006
 B.R.
 1/31/2006
 8/30/2007

 TOM-1242L-NF-R

Microphone Edition Sheet