



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Item # TPI-5010

UNIVERSAL ADAPTER CABLE KIT (RG 58)

For use with TPI-3000A and TPI-5000A adapter kits

- Provides the functionality of an entire set of cables
- Creates the cable of your choice using the universal cable and any combination of connectors from the kits noted above
- No soldering, no crimping - cable may be used over and over in different combinations
- Soft insulation makes cable flexible and easy to handle
- Kit includes 6ea. 48" universal cables and wall rack

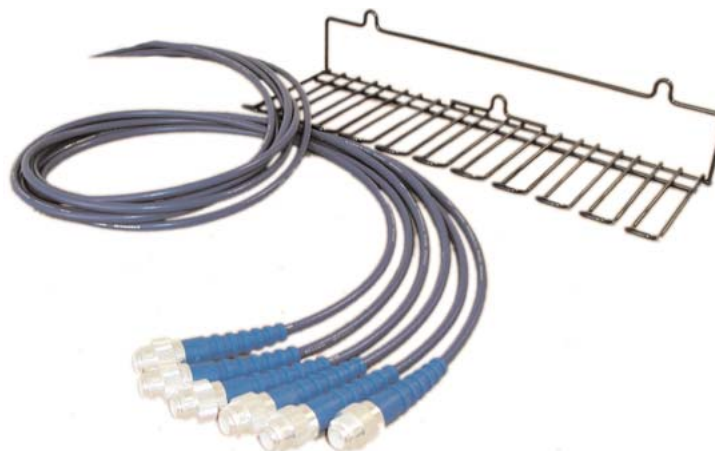

Material:

- Inner Conductor:** 20AWG (19/0.18mm) Tinned Stranded Copper Wires
0.90mm Nominal O.D.
- Dielectric Core:** Foamed Polyethylene
2.85 +/- 0.10mm O.D.
- Shield:** Adhesive AL-Mylar
- Outer Conductor:** Single Braid, 37AWG Tinned Copper Wire
3.40mm Nominal O.D.
Carriers-----16
Ends -----7
Picks / 25.4mm ---8 +/- 10%
Coverage -----90%
- Jacket:** Type II A, Non-Contaminating PVC

Specifications:

- Impedance:** 50Ω +/- 2.0Ω
- Capacitance:** 94.8 pF/m Nominal
- Velocity of Propagation:** 70% Nominal
- Attenuation:** See Chart Below

db/100ft	MHz	db/100m	MHz
0.43	1	1.4	1
1.4	10	4.4	10
3.0	50	9.9	50
4.3	100	14.0	100
6.1	200	20.0	200
8.7	400	28.4	400
11.6	700	37.9	700
13.2	900	43.2	900
13.9	1000	45.6	1000