



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Overview

The KEMET TPI ferrite core inductors are designed for a very low core loss and its flat wire “1 turn through the construction” design enables very high efficiency at large currents. The core material used is ideal for high switching frequency applications.

Applications

- High-switching DC-DC power supplies
- Point of loads (POL)
- Servers and storage
- Supercomputers
- Various decentralized power supplies

Benefits

- 1 Turn coil ferrite
- Operating temperature up to +125°C
- High switching frequency
- Low core loss
- Low DCR
- High current
- Low self-heating



Part Number System

TPI	128080	L	180	N
Series	Size Code	Inductor	Inductance Code nH	Core Material
TPI	128080 118082		xxx = xxx nH	N = Standard

Performance Characteristics

Item	Performance Characteristics
Operating Temperature	-40°C to +125°C (including self-temperature rise)
Rated Inductance Range	150 – 230 nH at 100 kHz, 1 mA
Inductance Tolerance	±10%
Rated DC Resistance	0.29 mΩ
DC Resistance Tolerance	±5%
Rated Current	50 A



Table 1 – Ratings & Part Number Reference

Part Number	Inductance (nH) at 100 kHz, 1 mA	Inductance Tolerance	DC Resistance (mΩ) ±5%	Rated Current (A)			
				Irms ¹ (Ref.)	Isat ² (Ref.)		
					25°C	85°C	125°C
TPI128080L180N	180	±10%	0.29	50	78	68	54
TPI128080L210N	210	±10%	0.29	50	70	60	52
TPI128080L230N	230	±10%	0.29	50	64	56	50
TPI118082L150N	150	±10%	0.29	50	93	79	67
TPI118082L180N	180	±10%	0.29	50	79	67	57

¹ T = 40 K rise at rated current.

² Inductance drop 20% at rated current.

DC-Superposed Characteristics


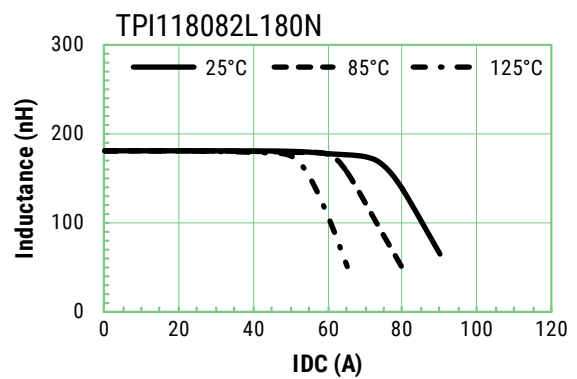
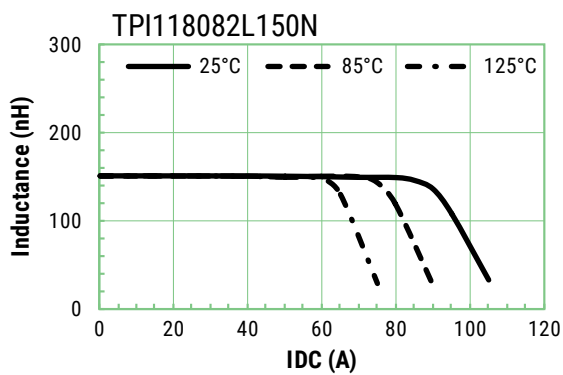


PRELIMINARY DRAFT

SMD Inductors
Large-Current Power Inductors TPI

Electronic Components
KEMET
CHARGED!

DC-Superposed Characteristics cont.

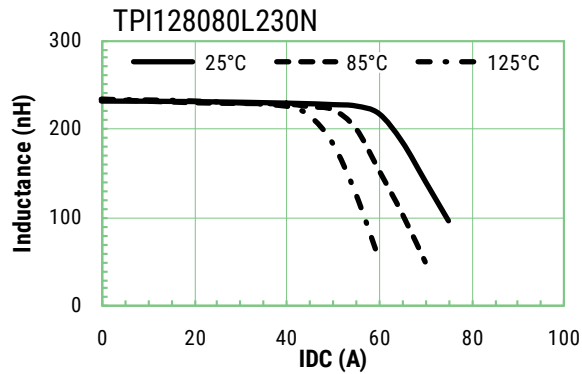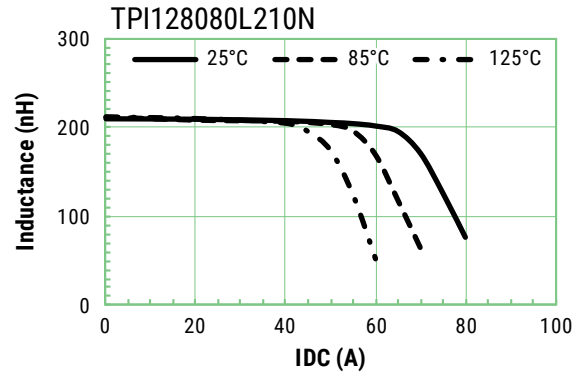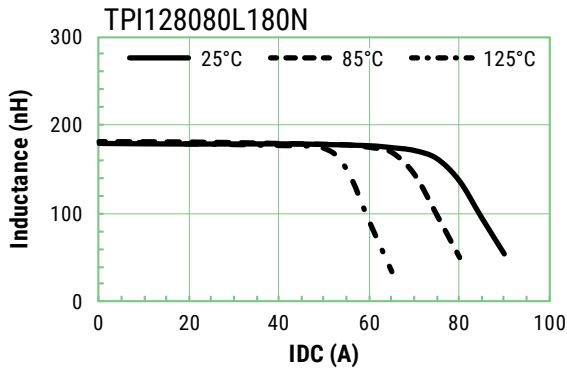


Dimensions

Part Number	Dimensions (mm)	Land Pattern (mm)
TPI-118082		
TPI-128080		

PRELIMINARY DRAFT


Taping Specification

Dimensions of indented square hole plastic tape

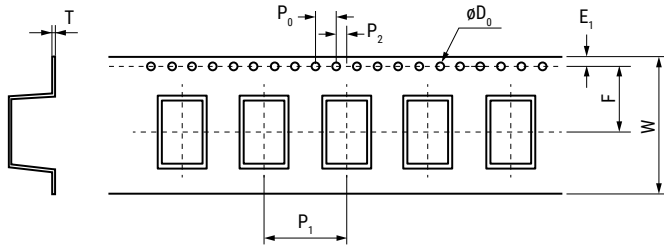

Case Size	Reel Quantity	Dimensions (mm)						
		E_1	P_1	P_2	P_0	ϕD_0	T	
TPI118082	400	Tolerance	± 0.1	± 0.1	± 0.1	± 0.1	± 0.05	± 0.05
		Nominal	1.75	16.0	2.0	4.0	1.55	0.4
TPI128080	400	Tolerance	± 0.1	± 0.1	± 0.1	± 0.1	± 0.05	± 0.05
		Nominal	1.75	16.0	2.0	4.0	1.55	0.4

Reel Specifications

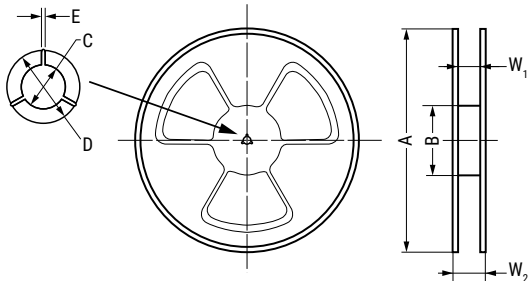


Case Size	Dimensions (mm)							
	A	B	C	D	E	W_1	W_2	
TPI118082	Tolerance	± 2.0	± 2.0	± 0.2	± 0.8	± 0.5		
	Nominal	$\phi 330$	$\phi 100$	$\phi 13.2$	$\phi 21.5$	2.0	24.5	28.9
TPI128080	Tolerance	± 2.0	± 2.0	± 0.2	± 0.8	± 0.5		
	Nominal	$\phi 330$	$\phi 100$	$\phi 13.2$	$\phi 21.5$	2.0	24.5	28.9

Soldering Process

Recommended Reflow Soldering Profile

Reference ICP/JEDEC J-STD-020E

Profile Feature	Pb-Free Assembly
Preheat/Soak	
Temperature Minimum (T_{smin})	150°C
Temperature Maximum (T_{smax})	200°C
Time (t_s) from T_{smin} to T_{smax}	60 – 120 seconds
Ramp-Up Rate (T_L to T_p)	3°C/second maximum
Liquidous Temperature (T_L)	217°C
Time Above Liquidous (t_L)	60 – 150 seconds
Peak Temperature (T_p)	245°C
Time Within 5°C of Maximum Peak Temperature (t_p)	30 seconds maximum
Ramp-Down Rate (T_p to T_L)	6°C/second maximum
Time 25°C to Peak Temperature	8 minutes maximum

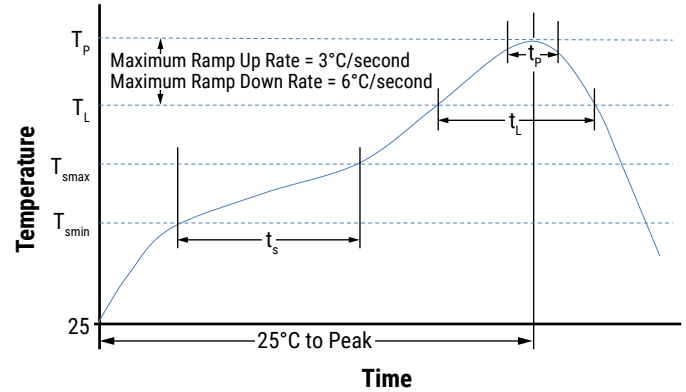

Handling Precautions

Inductors should be stored in normal working environments. While the inductors themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Atmospheres should be free of chlorine and sulfur bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. For optimized solderability, inductors' stock should be used promptly, preferably within six months of receipt.

Export Control

For customers in Japan

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

For customers outside Japan

Inductors should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destruction weapons (nuclear, chemical, biological weapons or missiles), or any other weapons.

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

KEMET is a registered trademark of KEMET Electronics Corporation.