



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- High power density power supply (encapsulated)
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2×MOPP
- Low leakage current <100 µA rated for BF applications
- EMC emission and immunity to IEC 60601-1-2 4th edition
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Protection class I and II
- Operating up to 5000m altitude
- Ready to meet ErP directive, no load power consumption
- 5 year product warranty



The TPP 30-J AC/DC power supplies feature a reinforced double I/O isolation system according to medical safety standards IEC/EN/ES 60601-1 3rd edition for 2 × MOPP approved for an operating altitude of 5000 m. The earth leakage current is below 100 µA what makes the units suitable for BF (body floating) applications. The excellent efficiency of up to 91.5% offers a high power density in the packaging format 1.5" x 3.95". The full load operating temperature range covers -40°C to +60°C while it goes up to 85°C with 50% load derating. The units operate in compliance to the medical EMC emission and immunity levels according to latest standard IEC 60601-1-2 4th edition.

Models				
Order Code	Output Power (max.)	Output Voltage	Output Current (max.)	Efficiency (typ.)
TPP 30-103-J	20 W	3.3 VDC	6'000 mA	84.0 %
TPP 30-105-J	30 W	5.0 VDC	6'000 mA	87.0 %
TPP 30-109-J		9.0 VDC	3'340 mA	88.0 %
TPP 30-112-J		12 VDC	2'500 mA	90.5 %
TPP 30-115-J		15 VDC	2'000 mA	90.5 %
TPP 30-124-J		24 VDC	1'250 mA	89.5 %
TPP 30-136-J		36 VDC	840 mA	90.0 %
TPP 30-148-J		48 VDC	630 mA	91.5 %

Input Specifications

Input voltage range	– AC range (universal input) – DC range	85 – 264 VAC (derating of 4 %/V below 90 VAC input required) 120 – 370 VDC
Input frequency		47 – 63 Hz
Input current at full load	– at 115 VAC / 230 VAC	0.8 A max. / 0.4 A max.
Input protection		T1.6 A/250 VAC (internal fuse)
Input inrush current	– at 230 VAC	40 A max.
Zero load power consumption		0.04 W typ. (acc. ErP directive)

Output Specifications

Voltage set accuracy		±1%
Regulation	– Input variation (Vin min. to Vin max.) – Load variation (0 to 100%)	0.2% max. 3.3 & 5.0 Vout models: 0.7% max. other output models: 0.5% max.
Minimum load		not required
Temperature coefficient		±0.02%/K
Hold-up time	– at 115 VAC	16 ms typ.
Start-up time		1500 ms max.
Rise time		40 ms typ.
Ripple and noise (20 MHz Bandwidth)	3.3, 5.0 & 9.0 Vout models: 12, 15, 24 & 36 Vout models: 48 Vout model:	50 mVp-p typ. w. cap. 10µF/25V 1206 X7R MLCC 50 mVp-p typ. w. cap. 1µF/50V 1206 X7R MLCC 50 mVp-p typ. w. cap. 0.1µF/100V 1206 X7R MLCC
Transient response	– Peak deviation (25% load step change) – Recovery time	3% max. 500 µs typ.
Overvoltage protection		125 – 140% of nominal Vout
Current limitation		at 140% lout typ.
Short circuit protection		continuous (automatic recovery), hiccup
Capacitive load	3.3 Vout model: 5 Vout model: 9 Vout model: 12 Vout model: 15 Vout model: 24 Vout model: 36 Vout model: 48 Vout model:	10'000 µF max. 12'000 µF max. 3'720 µF max. 2'085 µF max. 1'350 µF max. 520 µF max. 235 µF max. 130 µF max.

General Specifications


Temperature ranges	– Operating – Storage	–40°C to +85°C –40°C to +100°C
Output power derating	– Temperature – Low input voltage	3.3, 5 & 9 Vout models: 2.25 %/K above +60°C other output models: 3.6 %/K above +75°C 4.0 %/V below 90 VAC
Humidity (non condensing)		5 – 95 % rel. H max.
Isolation voltage	– Input / Output (60 s) – Input / Floating (60 s) – Output / Floating (60 s)	4000 VAC (2 × MOPP insulation) 1500 VAC (1 × MOPP insulation) 1500 VAC (1 × MOPP insulation)
Leakage current (at 264 VAC)		100 µA max.
Isolation resistance (at 500 VDC)		100 MOhm min.
Altitude during operation		5000 m max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications (continued)

Switching frequency (at 230 VAC)		30 – 60 kHz (pulse width modulation)
Reliability	– calculated MTBF at +25°C acc. to MIL-HDBK-217F	3'341'000 h
Weight		119 g (4.20 oz)
EMI emission	– Conducted & Radiated input suppression – Harmonic current emissions – Voltage flicker	EN 55011 limits to IEC 60601-1-2 4th edition EN 55032 class B (internal filter) IEC / EN 61000-3-2, class A IEC / EN 61000-3-3, (class tba.)
EMC immunity	– ESD (electrostatic discharge) – Radiated immunity – Fast transient – Surge – Conducted immunity – Magnetic field immunity – Voltage dip and interruptions	EN 55024, EN 60601-1-2 4th edition EN 61000-4-2, air ±15 kV, contact ±8 kV, perf. criteria A EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±1 kV perf. criteria A EN 61000-4-6, 20 Vrms, perf. criteria A EN 61000-4-8, 30 A/m, perf. criteria A EN 61000-4-11, 1 cycle perf. criteria A, 250 cycle perf. criteria B
Safety standards and certification	– Certification documents	UL/IEC/EN 60950-1, UL/IEC/EN 62368-1 UL/IEC/EN 60601-1 3rd edition ANSI/AAMI ES60601-1:2005(R)2012 IEC/EN 60335-1, IEC/EN 61558 www.tracopower.com/overview/tpp30a-j
Shock and vibration		Vibration acc. IEC 60068-2-6 Shock acc. IEC 60068-2-27
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU
Protection class		class II prepared
Connection		JST pin connector

Outline Dimensions

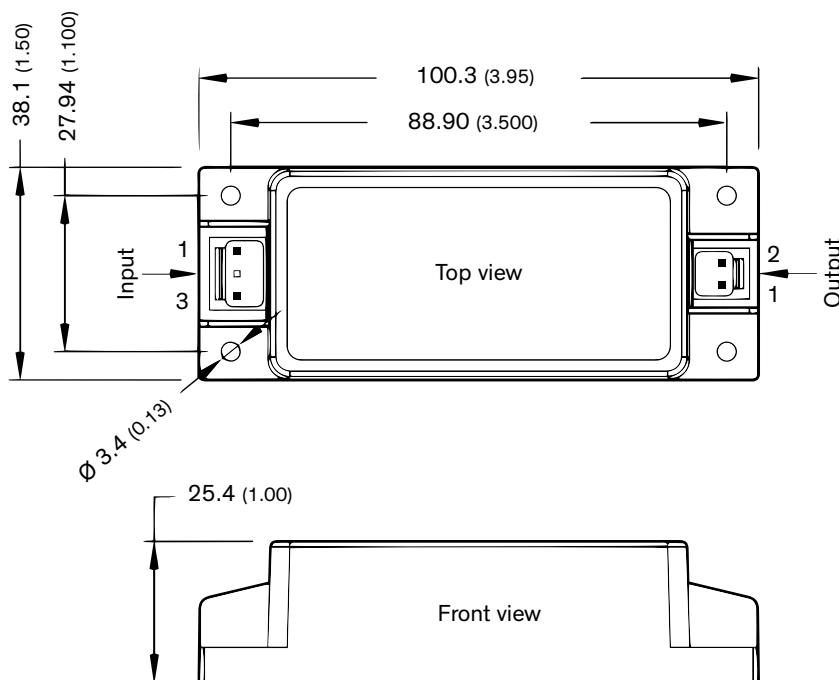

JST pin connectors

Input		Output	
Pin	Single	Pin	Dual
1	Line	1	+Vout
3	Neutral	2	-Vout

Input: JST series
mates with JST crimp terminal: SVH-21T-P1.1
and terminal housing: VHR-3N

Output: JST series
mates with JST crimp terminal: SVH-21T-P1.1
and terminal housing: VHR-2N

Dimension in mm, () = inch
Tolerances: x.x ±0.5 (±0.02)
x.xx ±0.25 (±0.01)