



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Multilayer Triplexer

For 1560-1606MHz / 2400-2500MHz / 4900-5950MHz

TPX205950MT-7010A1

2.0x1.25mm [EIA 0805]*

* Dimensions Code JIS[EIA]

Multilayer Triplexer


Conformity to RoHS Directive

For 1560-1606MHz / 2400-2500MHz / 4900-5950MHz


TPX205950MT-7010A1

SHAPES AND DIMENSIONS

[Top view]

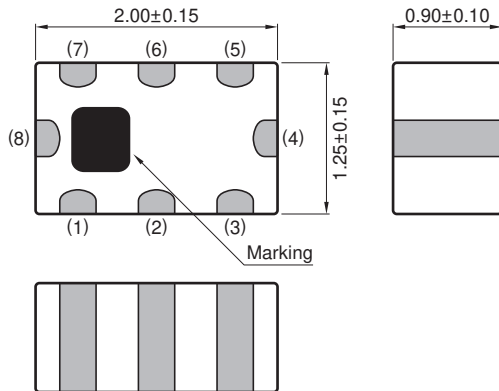

[Bottom view]

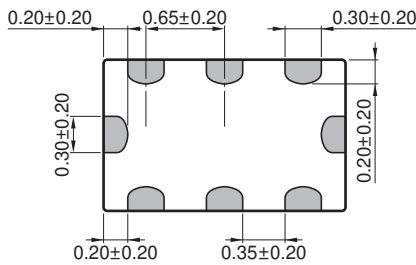


Terminal functions

1	GND
2	Common port
3	GND
4	Middle-band port
5	GND
6	High-band port
7	GND
8	Low-band port


Dimensions in mm

RECOMMENDED LAND PATTERN

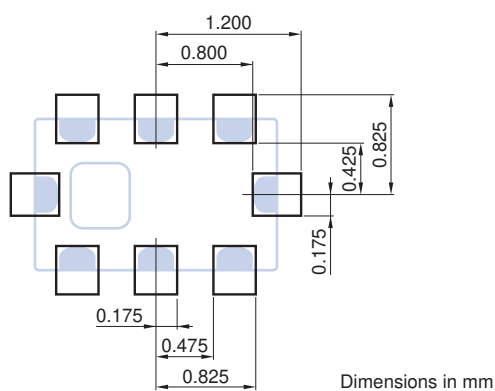

Dimensions in mm

EVALUATION BOARD

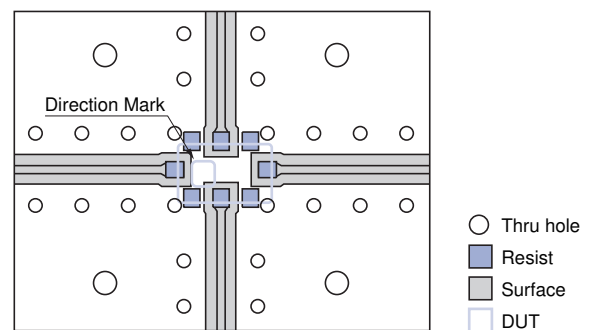

Material, Layer	Thickness
Top Resist	Resist
Copper Surface Pattern	0.035mm
FR-4	0.10mm
Copper Inner GND	0.018mm
FR-4	0.30mm
Copper Bottom GND	0.035mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

RoHS Directive Compliant Product: See the following for more details. <https://product.tdk.com/info/en/environment/rohs/index.html>

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

TPX205950MT-7010A1

ELECTRICAL CHARACTERISTICS

LOW-BAND

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	1560 to 1606	—	0.47	0.60
	1560 to 1606	—	—	0.70 (−40 to +85°C)
Return Loss (dB)	1560 to 1606	9.54	16	—
	2400 to 2500	14	16	—
	4800 to 6000	15	23	—
Attenuation (dB)	2400 to 2500	13	—	— (−40 to +85°C)
	4800 to 6000	14	—	— (−40 to +85°C)
	Characteristic Impedance (Ω)		50 (Nominal)	

· Ta: +25±5°C

MIDDLE-BAND

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	2400 to 2500	—	0.45	0.73
	2400 to 2500	—	—	0.81
Return Loss (dB)	2400 to 2500	15	20	—
	860 to 960	10	11	—
	1545 to 1605	13	16	—
	3600 to 3750	8	9	—
	4800 to 5000	20	29	—
	7200 to 7500	10	24	—
Attenuation (dB)	9600 to 10000	5	8	—
	860 to 960	9	—	— (−40 to +85°C)
	1545 to 1605	12	—	— (−40 to +85°C)
	3600 to 3750	7	—	— (−40 to +85°C)
	4800 to 5000	19	—	— (−40 to +85°C)
	7200 to 7500	9	—	— (−40 to +85°C)
	9600 to 10000	4	—	— (−40 to +85°C)
	Characteristic Impedance (Ω)		50 (Nominal)	

· Ta: +25±5°C

HIGH-BAND

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	4900 to 5950	—	0.62	0.80
	4900 to 5950	—	—	0.92
Return Loss (dB)	4900 to 5950	9.54	15	—
	860 to 960	24	26	—
	1545 to 1605	24	27	—
	1710 to 1990	25	29	—
	2170	30	32	—
	3920 to 4720	0.2	0.6	—
	8100 to 8800	10	16	—
	8820 to 9800	14	27	—
Attenuation (dB)	9800 to 11800	25	30	—
	860 to 960	23	—	— (−40 to +85°C)
	1545 to 1605	22	—	— (−40 to +85°C)
	1710 to 1990	24	—	— (−40 to +85°C)
	2170	29	—	— (−40 to +85°C)
	3920 to 4720	0.2	—	— (−40 to +85°C)
	8100 to 8800	5	—	— (−40 to +85°C)
	8820 to 9800	13	—	— (−40 to +85°C)
	9800 to 11800	24	—	— (−40 to +85°C)
	Characteristic Impedance (Ω)		50 (Nominal)	

· Ta: +25±5°C

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

TPX205950MT-7010A1

ELECTRICAL CHARACTERISTICS

COMMON

Item		Frequency Range (MHz)	Min.	Typ.	Max.
Isolation (dB)	Middle to High	4800 to 5000	20	28	—
	Middle to Low	1559 to 1606	15	19	—
	High to Low	1559 to 1606	24	28	—
Characteristic Impedance (Ω)				50 (Nominal)	

· Ta: +25±5°C

TEMPERATURE RANGE


Operating temperature (°C)	Storage temperature (°C)
-40 to +85	-40 to +85

TPX205950MT-7010A1


FREQUENCY CHARACTERISTICS

LOW-BAND


Insertion Loss

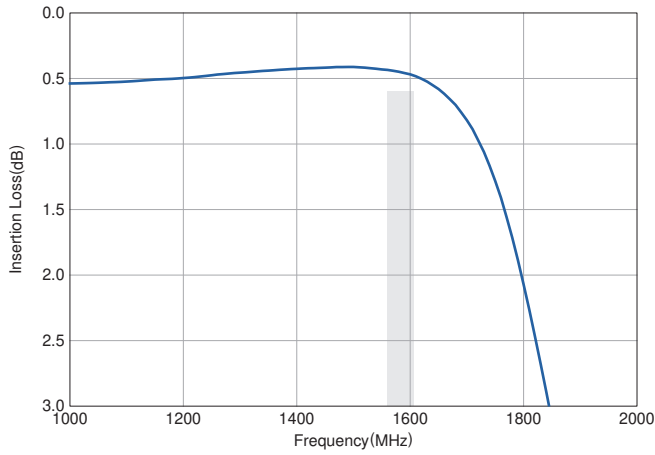

Return Loss

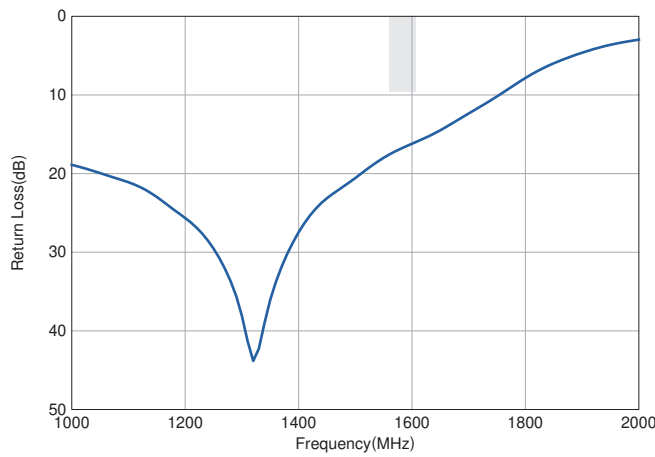


Attenuation

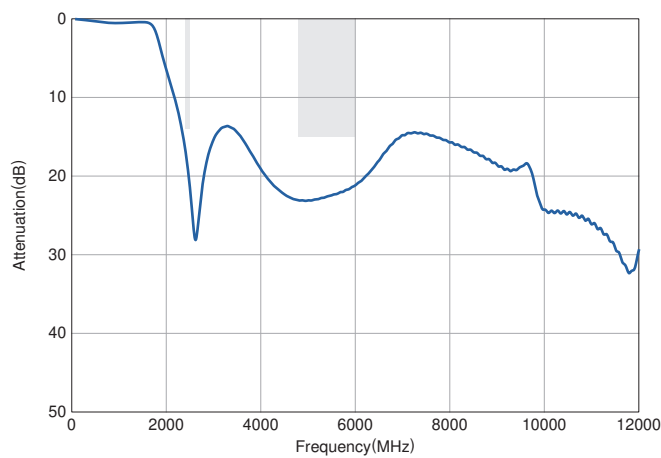


MIDDLE-BAND


Insertion Loss

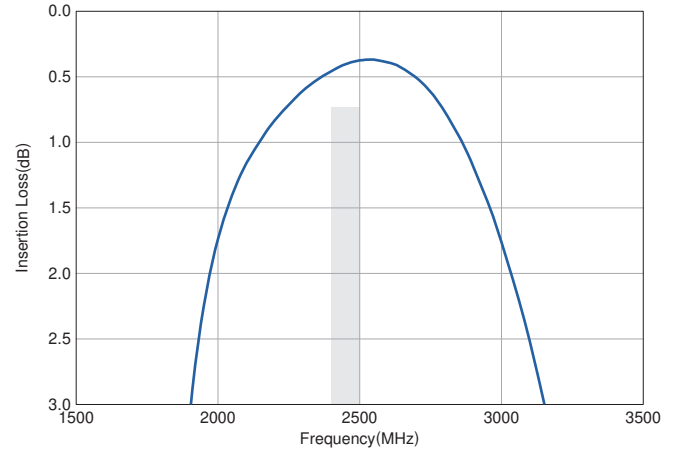

Return Loss

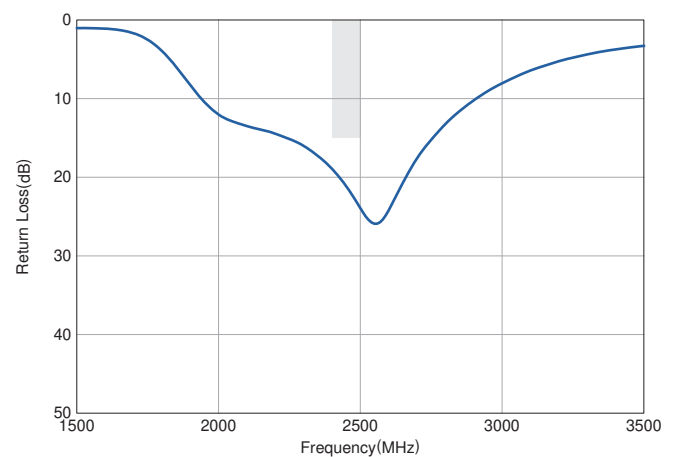

Attenuation

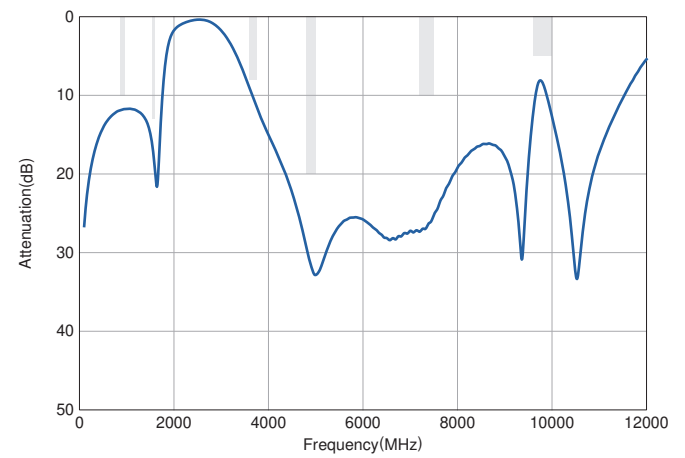


- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

TPX205950MT-7010A1


FREQUENCY CHARACTERISTICS

HIGH-BAND


Insertion Loss

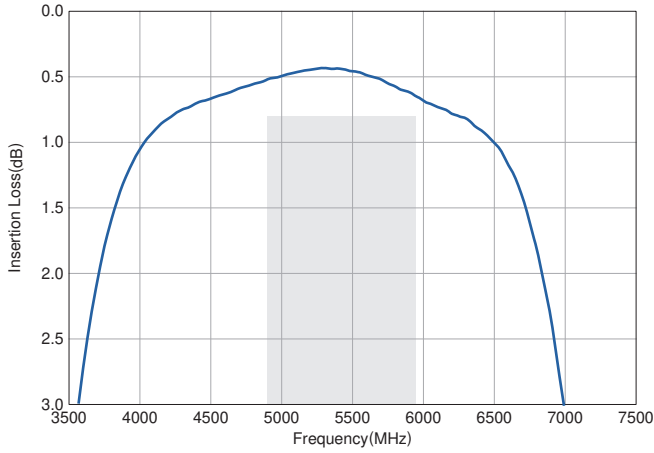

Return Loss

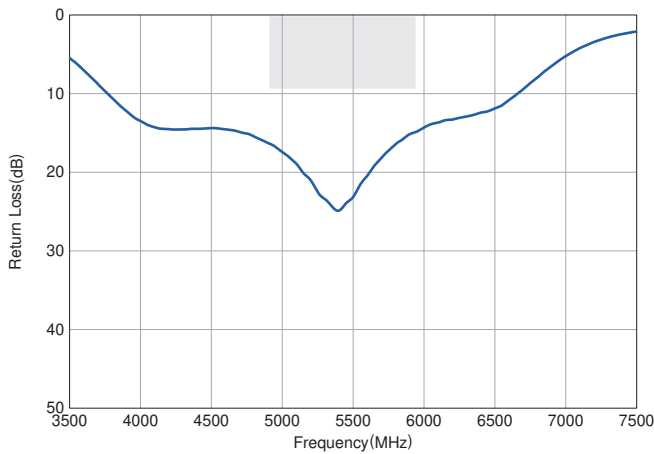

Attenuation

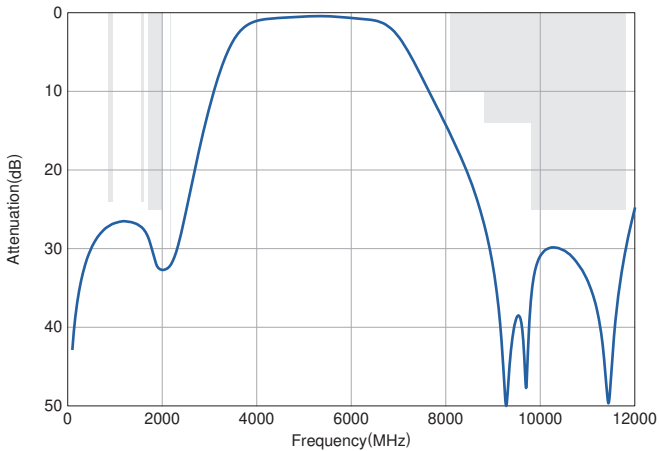


- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

TPX205950MT-7010A1


FREQUENCY CHARACTERISTICS

COMMON


Return Loss

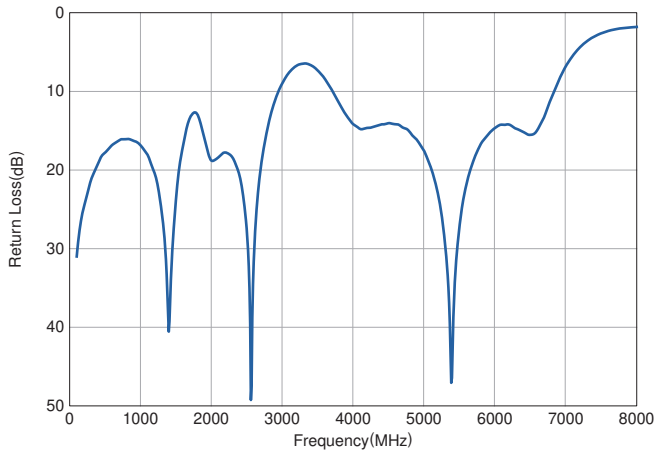


Isolation (Low-Mid)

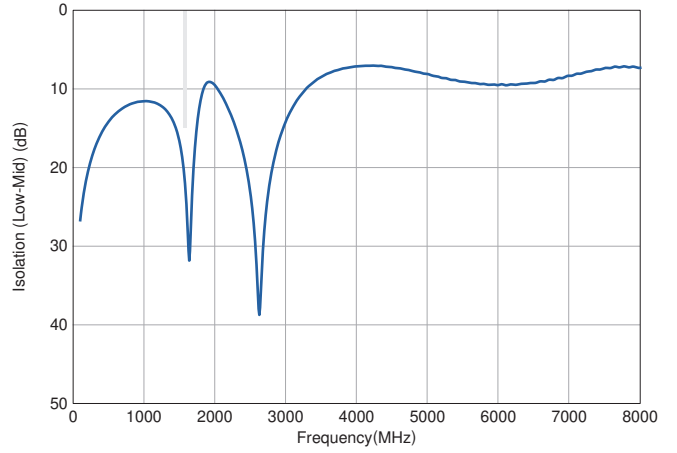

Isolation (Low-High)

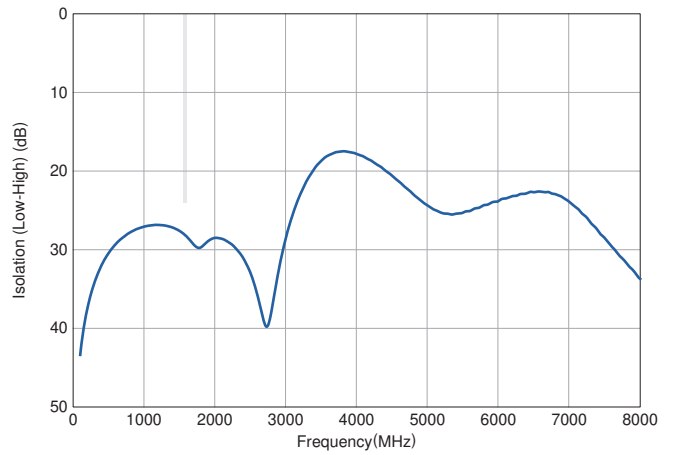


Isolation (Mid-High)

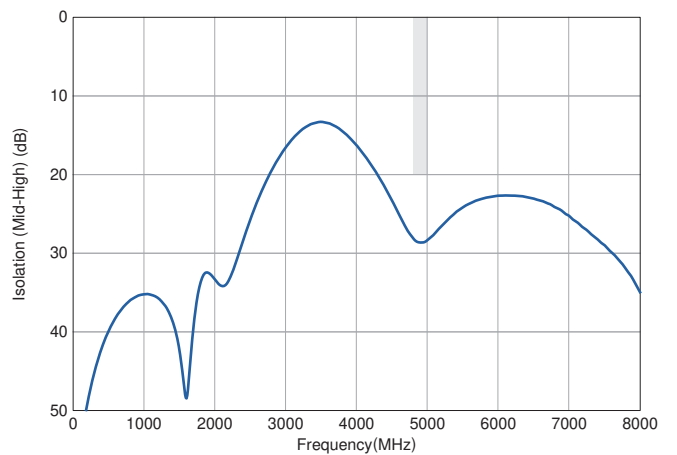

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

RECOMMENDED REFLOW PROFILE

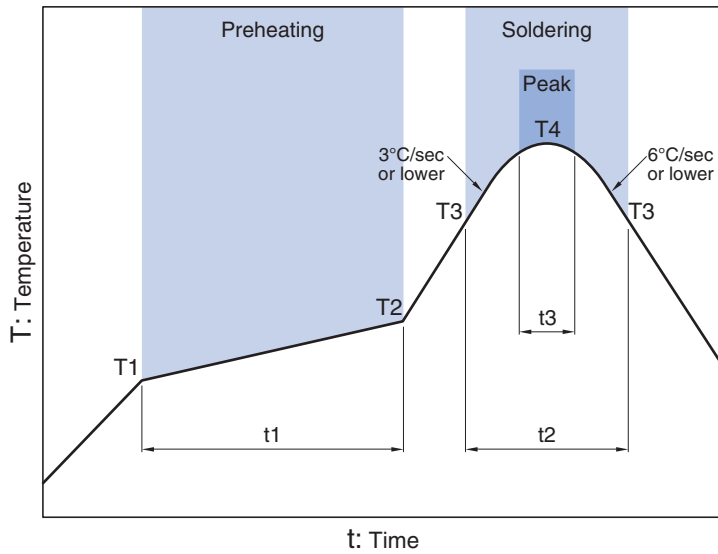

Preheating			Soldering			
Temp.	Time		Critical zone (T3 to T4)		Peak	
T1	T2	t1	Temp.	Time	Temp.	Time
150°C	200°C	60 to 120sec	T3	t2	T4	t3*
			217°C	60 to 120sec	240 to 260°C	30sec max.

* t3 : Time within 5°C of actual peak temperature
 The maximum number of reflow is 3.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- | | |
|---|--|
| (1) Aerospace/Aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.