



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



0.5 Amps TR Series



- 3 Pin SIP 3T Switching Regulator
- Wide Input Range
- Continuous Short-circuit Protection
- Pin Compatible with LM78MXX
- Efficiency up to 94%
- -40 °C to +85 °C Operating Temperature
- 3 Year Warranty

Specification

Input

- Input Voltage Range • See table
- Input Current • See table
- Input Reflected Ripple • 35 mA pk-pk through 12 μ H inductor and 47 μ F capacitor, 5 Hz to 20 MHz
- Input Filter • External capacitor (see application notes)

Output

- Output Voltage • See table
- Minimum Load • 5 mA
- Line Regulation • $\pm 0.5\%$ max
- Load Regulation • $\pm 0.8\%$ from 10% to 100% load
- Setpoint Accuracy • $\pm 3\%$
- Turn-on Time • See note 6
- Ripple & Noise • 60 mV pk-pk with 10% minimum load, 20 MHz bandwidth
- Maximum Capacitive Load • 110 μ F for S3V3, S05 and S12 models, 47 μ F for S15 models
- Short Circuit Protection • Indefinite (automatic recovery)
- Temperature Coefficient • 0.02%/°C

General

- Efficiency • See table
- Isolation Voltage • Non-isolated
- Switching Frequency • 570 kHz typical
- Package Style • 3 pin SIP
- MTBF • >4.0 Mhrs to MIL-HDBK-217F at 25 °C, GB

Environmental

- Operating Temperature • -40 °C to +85 °C, S3V3 and S05, derate from 100% load at 70 °C to 40% load at 85 °C, S12 and S15 derate from 100% load at 65 °C to 40% load at 85 °C
- Operating Humidity • 95% RH
- Case Temperature • +100 °C max
- Storage Temperature • -40 °C to +125 °C
- Cooling • Convection-cooled


Notes

1. All dimensions in inches (mm)
2. Weight: 0.004 lbs (1.8 g)
3. Pin pitch tolerance: ± 0.014 (± 0.35)
4. Case tolerance: ± 0.02 (± 0.5)
5. Efficiency range given for maximum V_{in} to minimum V_{in}
6. For maximum reliability, ensure turn on time is >1 ms by placing a 22 μ F capacitor between +Vin and GND

Model Numbers

Input Voltage	No Load Input Current	Output Voltage	Output Current	Efficiency ⁹	Model Number
4.5-28.0 VDC	1.0 mA	3.3 V	500 mA	75-89%	TR05S3V3
7.0-28.0 VDC	1.0 mA	5.0 V	500 mA	80-92%	TR05S05
14.0-28.0 VDC	1.5 mA	12.0 V	500 mA	90-94%	TR05S12
17.0-28.0 VDC	2.0 mA	15.0 V	500 mA	92-94%	TR05S15


Mechanical Details

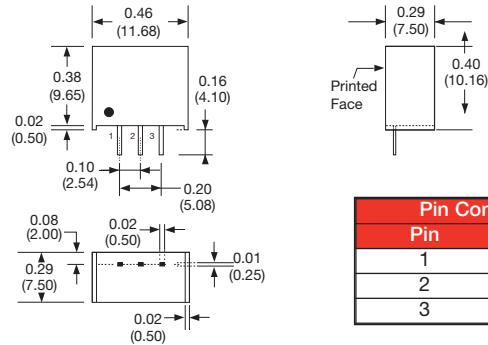

Pin Connections	
Pin	Function
1	+Vin
2	GND
3	+Vout

Application Notes

Input Filter to meet Class B Conducted Emissions

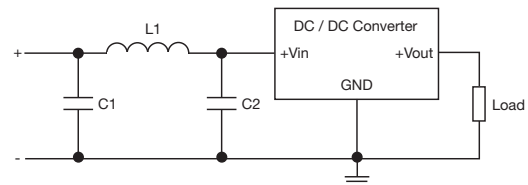

C1	L1	C2
10 μ F, 35 V	6.8 μ H	10 μ F, 35 V