



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: TR250-120U


DOCUMENT: SCD 22285
 PCN: 337589, 400071
 REV LETTER: L
 REV DATE: FEBRUARY 5, 2002
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Max Electrical Rating at 20°C

Operating Voltage: 60V_{DC}
Fault Voltage: 250V_{RMS}
Interrupt Current: 3A_{RMS}

Lead Material : 22 AWG Sn/Pb plated copper

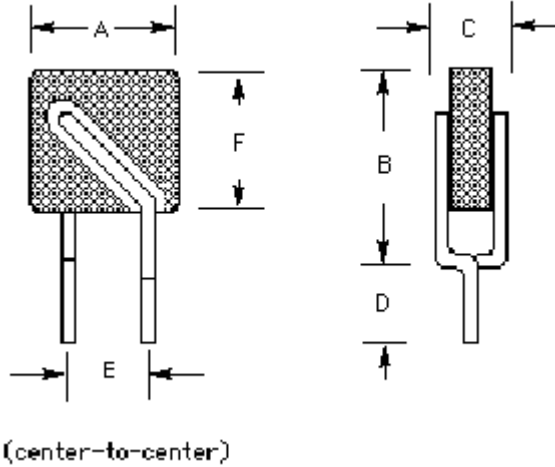

Marking:

- _____ Raychem Logo
- XX 20** _____ Part Identification
- □ □ _____ Lot Identification

TABLE I. DIMENSIONS:

	A		B		C		D		E	F	
	Min	Max	Min	Max	Min	Max	Min	Max	Nom	Min	Max
mm:	--	6.0	--	10.0	--	3.8	4.7	--	5.0	--	6.0
in:	--	(0.236)	--	(0.394)	--	(0.150)	(0.185)	--	(0.197)	--	(0.236)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

IHOLD (A)		RESISTANCE (Ω) @ 20° C			TIME TO TRIP @ 1A	OPERATING TEMPERATURE (°C)	
20°C	70°C	R MIN	R MAX	R _{1 MAX} *	Seconds, Typical	MIN	MAX
0.120	0.060	6.0	10.0	16.0	1.0	-40	85

*Maximum device resistance at 20°C measured 1 hour post trip.

Additional Rating @ 20°C

Lightning Withstand: ITU AT 1.5kV Storage Temperature: -40° to 85°C

Agency Recognition: UL, CSA, TUV
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame