



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Smart Technology. Delivered.

Phantom® Multi-Band Antennas



DUAL-BAND PHANTOM® ANTENNA IS IDEAL FOR CELLULAR AND PCS APPLICATIONS

Laird's unique patented Phantom® multi band cellular antenna operates simultaneously on seven bands and is a tough antenna for outdoor or indoor applications. The revolutionary design measures only 2.3". The patented field Phantom® technology ensures uninterrupted voice and data transmissions in urban canyons and rural drop off areas.

The industry standard NMO mounting socket mates with all Laird's magnetic, trunk lid, and hole mounts. A threaded permanent stud mount model is also available for vandal resistant mounting on brackets, panels, ceilings or any other kind of housing.

FEATURES

- Operates simultaneously on 7 bands
 - AMPS 806-896 MHz
 - GSM 890-960 MHz
 - GPS 1575.42 MHz
 - DCS 1710-1880 MHz
 - PCS 1850-1990 MHz
 - UMTS 1900-2170 MHz
 - ISM (BT) 2.4 - 2.5 GHz
- Patented Phantom® technology ensures uninterrupted voice and data transmissions in urban canyons and rural drop off areas
- U.S. Patent Nos. 5,977,931 – 6,292,156; other patents pending

MARKETS

- Mobile Radio
- Fixed Station
- In-Building Wireless

Americas: +1.847 839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

SPECIFICATIONS

	AMPS	GSM	GPS	DCS	PCS	UMTS	ISM
Frequency Range MHz	806-896	890-960	1575.42	1710-1880	1850-1990	1900-2170	2400-2500
Peak Gain dBi	5.9	5.8	5.1	4.2	4.2	4.4	3.0
Polarization	Vertical						
Impedance	50 Ω						
Input Power	100 watts						
Input Connection	< 2:1						<2.5:1
Dimensions	1.44" wide x 2.30" tall (NMO), 1.44" x 3.15" tall (P-mount)						
Radome Material	ABS						
Weight	.15 lb (NMO) and .25 lb (P-mount)						



MODEL AND ORDERING INFORMATION

MODEL	DESCRIPTION	MOUNT	COLOR	RADOME HEIGHT	WEIGHT	CONNECTOR
TRAB806/17103	Multi-Band Phantom*	NMO	Black	2.30"	.15 lbs	NMO
TRAB806/17103P	Multi-Band Phantom*	Permanent	Black	2.30"	.25 lbs	N Female
TRA806/17103	Multi-Band Phantom*	NMO	White	2.30"	.15 lbs	NMO
TRA806/17103P	Multi-Band Phantom*	Permanent	White	2.30"	.25 lbs	N Female
TRADCA	Drop ceiling antenna adaptor for P-mount Phantom					
TRADCAGP	Drop ceiling antenna adaptor for P-mount Phantom with 6" x 6" x .016" ground plane					



ANTENNA PATTERNS

Azimuthal (X, Y or E-Plane)



Elevation (Y, Z or H-Plane)

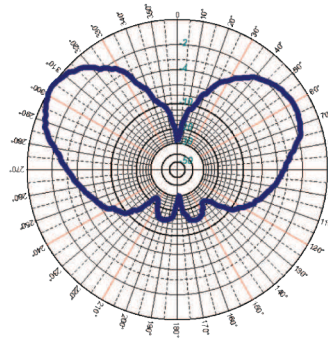



AMPS / GSM900
880-960 MHz
Test Freq = 920 MHz
Peak Gain: 5.8 dBi



GSM1800
1710-1880 MHz
Test Freq = 1795 MHz
Peak Gain: 4.2 dBi




UMTS
1900-2170 MHz
Test Freq = 2035 MHz
Peak Gain: 4.4 dBi



ISM / BT / Wifi
2400-2500 MHz
Test Freq = 2450 MHz
Peak Gain: 3.0 dBi

VSWR of TRA(B)806/17103(P)

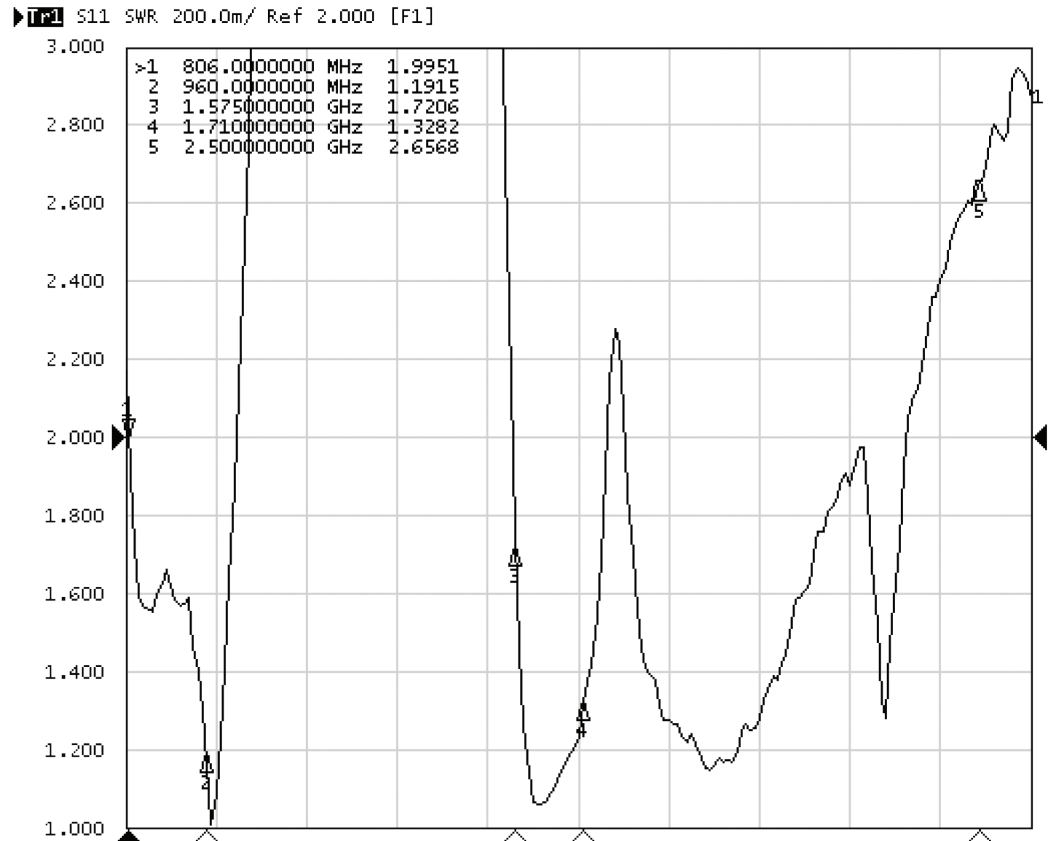

TRA(B)806/17103(P) Typical VSWR sweeps

Cell / GSM900 Frequency Range 806-960 MHz (VSWR <2:1)

Marker 1: 1.9951 to 1 @ 806 MHz

Marker 2: 1.1915 to 1 @ 960 MHz

GPS Frequency 1575 MHz (VSWR <2:1)

Marker 3: 1.7206 to 1 @ 1575 MHz

DCS / GSM1800 / UMTS / WiFi Frequency Range 1710-2500 MHz (VSWR <2:1)

Marker 4: 1.3282 to 1 @ 1710 MHz

Marker 5: 2.6568 to 1 @ 2500 MHz

6/30/2006

ANT-DS-PHANTOM-MULTI-BAND 0415

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.