



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TROMPETER SPECIFICATION SHEET  
CABLE, RADIO FREQUENCY, TRIAXIAL

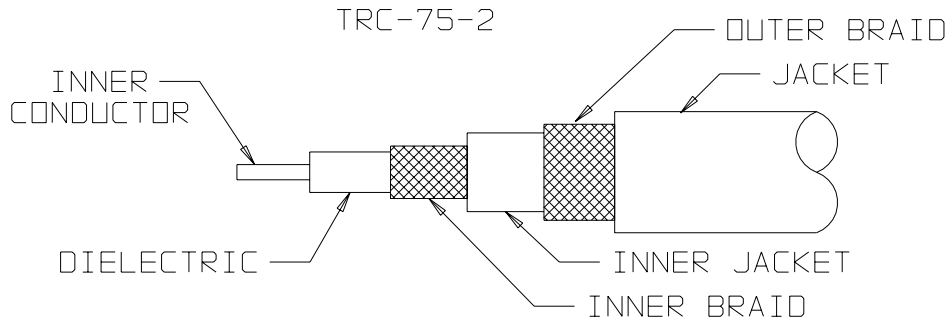

REQUIREMENTS:

1. IMPEDANCE - - - - - 75 ±2 ohms
2. OPERATING VOLTAGE - - - - - 6 KVDC MAX & 2 KVRMS MAX
3. BEND RADIUS - - - - - 1.25 INCH MIN
4. CAPACITANCE - - CENTER COND TO INNER BRAID - 20.5 PF/FT  
 CENTER COND TO OUTER BRAID - 16.7 PF/FT  
 \*INNER BRAID TO OUTER BRAID - 101.3 PF/FT
5. VELOCITY OF PROPAGATION - - - - - 66% NOM
6. ATTENUATION: 

FREQUENCY	dB/100 FT NOM	FREQUENCY	dB/100 FT NOM
1 MHz	0.48	30 MHz	2.90
3 MHz	0.88	40 MHz	3.30
4 MHz	1.01	50 MHz	3.60
5 MHz	1.10	100 MHz	5.20
7 MHz	1.30	200 MHz	7.60
10 MHz	1.50	500 MHz	10.80
20 MHz	2.30	700 MHz	14.70
		1000 MHz	17.60
7. INNER CONDUCTOR DC RESISTANCE - - 44.4 ohms/1000 FT
8. OPERATING TEMPERATURE RANGE -40°C TO +80°C
9. WEIGHT - - - - - 43.02 LB/1000 FT
10. MARK: TROMPETER ELECTRONICS TRIAX TRC-75-2 (\*)

\* INNER BRAID UNGROUNDED      TABLE 1      (\*) VENDOR I.D. CODE

DESCRIPTION	CONSTRUCTION DETAILS
INNER CONDUCTOR	7 STRANDS OF AWG 34 TINNED COPPER WIRE. O.D. .0185 ±.001
DIELECTRIC	SOLID CLEAR POLYETHYLENE .116 ±.004 O.D.
INNER BRAID	SINGLE BRAID, AWG SIZE 36 TINNED COPPER WIRE. SHIELD COVERAGE 93% NOM MAX O.D. .146
INNER JACKET	CLEAR POLYETHYLENE .175 ±.005 O.D.
OUTER BRAID	SINGLE BRAID, AWG SIZE 36 TINNED COPPER WIRE. SHIELD COVERAGE 93% NOM, NOM O.D. .205
JACKET	YELLOW POLYVINYLCHLORIDE. OUTSIDE DIA .245 ±.005

DATE  
APPR  
DWN DKC  
ED11263  
REV E