



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 NOMINAL IMPEDANCE: 50 ±2 OHMS
- 1.3 VSWR (MAX):
 - DC to 8.0 GHz: 1.20:1
 - 8.0 to 12.4 GHz: 1.30:1
 - 12.4 to 18.0 GHz: 1.35:1
- VSWR POWER COEFFICIENT: 0.005/WATT
- 1.4 RESISTOR TEMP. COEFFICIENT: 500 PPM/°C
- 1.5 AMBIENT OPERATING TEMPERATURE:
 - 54°C to +125°C
- 1.6 STORAGE TEMP. RANGE:
 - 62°C to +125°C
- 1.7 MAXIMUM POWER RATING: 10 WATTS AVG.
 MAXIMUM RATED AVG. POWER AT +25°C
 AMBIENT TEMP. DERATED LINEARLY TO
 0 WATTS AT +125°C.
- 1.8 MAXIMUM PEAK POWER:
 1 KILOWATT (5 mSEC PULSE WIDTH)
- 1.9 WEIGHT: 0.50 Oz. MAX.

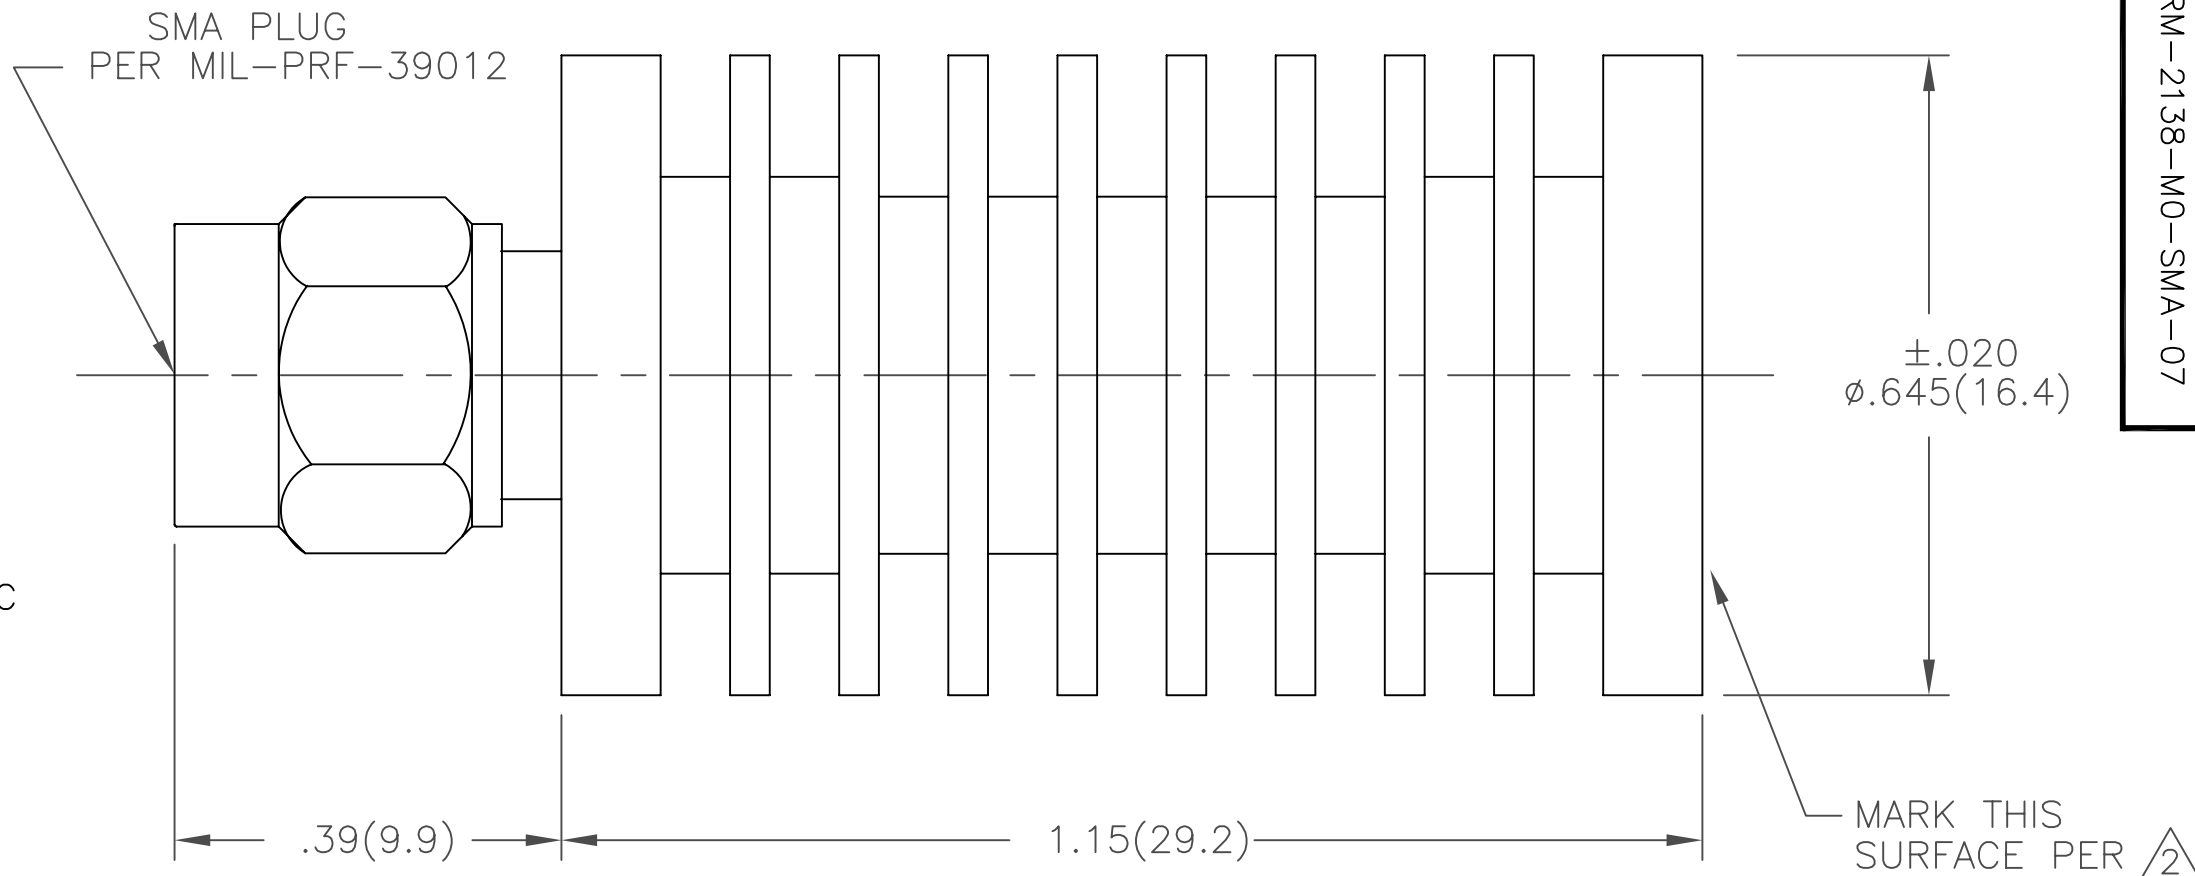

ALL OTHER MECHANICAL, ELECTRICAL AND ENVIRONMENTAL CHARACTERISTICS ARE IN ACCORDANCE WITH MIL-D-39030

MARKING: MARK SURFACE SHOWN (REF.: INK-04185-27-01 OR INK-08051-27-01) USE WHITE INK

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

DWG NO. WAS: 03972-01-00

| REV. | DESCRIPTION | DATE |
|------|---------------------|----------|
| I | RELEASED | 3/8/82 |
| A | ECR 3726 | 8/22/85 |
| B | ECR 6545 | 7/10/89 |
| C | ECR 7045 | 1/15/90 |
| C1 | UPDATE TO MODEL NO. | 7/31/92 |
| D | REDRAW ON CAD | 11/17/92 |
| E | ECN 15736 | 1/24/96 |
| E1 | ADDED TITLEBLOCK | 11/4/05 |

| | | | |
|---|----------------------------------|---|---|
| NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1° | CAGE CODE 34078 | MIDWEST MICROWAVE | |
| | | | TITLE TERMINATION -10 WATTS OUTLINE DRAWING |
| DRAWN/DATE A.BEATTY 11/16/92 | ENG./DATE G.KOZAK 11/25/92 | DRAWING NUMBER TRM-2138-M0-SMA-07-01 | REV. E1 |
| CHECKED/DATE M.HOLLMAN 11/29/92 | APPROVED/DATE | SCALE: 5=1 | SHEET 1 of 1 |