



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






■ Features :

- True sine wave output (THD<3%)
- High surge power up to 2000W
- High efficiency up to 92%
- Power ON-OFF switch
- Standby saving mode can be selected
- Front panel indicator for operation status
- Built-in fan ON-OFF control function
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input reverse polarity / Overload
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- 3 years warranty



SPECIFICATION


MODEL	TS-1000-112□	TS-1000-124□	TS-1000-148□	TS-1000-212□	TS-1000-224□	TS-1000-248□												
OUTPUT	RATED POWER (Typ.) 1000W																	
	MAXIMUM OUTPUT POWER (Typ.) 1150W for 180 sec. / 1500W for 10 sec. / surge power 2000W for 30 cycles																	
	AC VOLTAGE			Factory setting set at 110VAC			Factory setting set at 230VAC											
				100 / 110 / 115 / 120VAC selectable by setting button S.W			200 / 220 / 230 / 240VAC selectable by setting button S.W											
	FREQUENCY						60±0.1Hz 50/60Hz selectable by setting button S.W						50±0.1Hz 50/60Hz selectable by setting button S.W					
	WAVEFORM <small>Note.6</small>						True sine wave (THD<3%)											
	AC REGULATION (Typ.)						±3.0%											
SAVING MODE (Typ.)						Default disabled. Load ≤5W will be changed to standby mode												
FRONT PANEL INDICATOR						Battery voltage level, output load level, saving mode, fault and operation status												
INPUT	BAT. VOLTAGE		12V	24V	48V	12V	24V	48V										
	VOLTAGE RANGE (Typ.) <small>Note.4,6</small>		10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC										
	DC CURRENT (Typ.)		100A	50A	25A	100A	50A	25A										
	NO LOAD DISSIPATION (Typ.)		≤6W @ standby saving mode															
	OFF MODE CURRENT DRAW		≤1mA															
	EFFICIENCY (Typ.) <small>Note.1</small>		88%	89%	90%	90%	91%	92%										
	BATTERY TYPES		Open & sealed lead acid															
BATTERY INPUT PROTECTION	FUSE		40A*4	40A*2	20A*2	40A*4	40A*2	20A*2										
	BAT. LOW ALARM		11.3±4%	22.5±4%	45±4%	11.3±4%	22.5±4%	45±4%										
	BAT. LOW SHUTDOWN		10.5±4%	21±4%	42±4%	10.5±4%	21±4%	42±4%										
	REVERSE POLARITY		By internal fuse open															
OUTPUT PROTECTION	OVER TEMPERATURE		90°C ± 5°C			70°C ± 5°C												
			Protection type : Shut down o/p voltage, re-power on to recover; by internal RTH3 detect on heatsink of power diode															
	OUTPUT SHORT		Protection type : Shut down o/p voltage, re-power on to recover															
	OVER LOAD (Typ.)		105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.															
		Protection type : Shut down o/p voltage, re-power on to recover																
GFCI PROTECTION		Optional (Only type F)			None													
ENVIRONMENT	WORKING TEMP. <small>Note.3</small>		0 ~ +40°C @ 100% load ; +60°C @ 50% load															
	WORKING HUMIDITY		20% ~ 90% RH non-condensing															
	STORAGE TEMP., HUMIDITY		-30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH non-condensing															
	VIBRATION		10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes															
SAFETY & EMC	SAFETY STANDARDS		UL458 (only for "GFCI" receptacle-Type F), EAC TPTC 004			EAC TP TC 004												
	LVD		None			EN60950-1												
	WITHSTAND VOLTAGE		Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC															
	ISOLATION RESISTANCE		AC O/P-FG, Bat I/P-FG:100M Ohms/500VDC / 25°C / 70% RH															
	EMC EMISSION		Compliance to FCC class A, EAC TP TC 020			Compliance to EN55032 class A, 72/ 245/ CEE, 95/ 54/ CE, E-Mark, EAC TP TC 020												
	EMC IMMUNITY		Compliance to EAC TP TC 020			Compliance to EN61000-4-2,3,8, EAC TP TC 020												
OTHERS	MTBF		66.9K hrs min. MIL-HDBK-217F (25°C)															
	DIMENSION		345*184*70mm (L*W*H)															
	PACKING		4.3Kg; 2pcs/9.6Kg/1.16CUFT															
	COOLING		Loading controlled cooling fan for GFCI receptacle-type F ; Thermostatically controlled cooling fan for others.															
NOTE	<p>1.Efficiency is tested by 750W, linear load at 13V, 26V, 52V input voltage.</p> <p>2.All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting.</p> <p>3.Output derating capacity referenced by curve 1.</p> <p>4.Input derating capacity referenced by curve 2.</p> <p>5.The tolerance of each voltage value by models is:112/212→±0.5V;124/224→±1V;148/248→±2V</p> <p>6.TH.D is tested by 1000W, linear load at 13,26,52V input voltage.</p> <p>7.The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p>																	

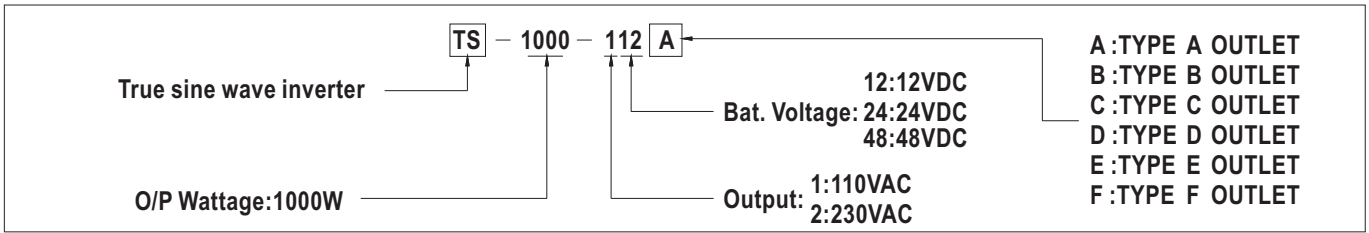

AC Output Receptacles (optional)

Receptacle type						
TYPE-A	USA	EUROPE	AUSTRALIA	U.K	JAPAN	GFCI
Country	FC	E13 CE	E13 CE	E13 CE	FC	UL US (Except for 48V input) FC
Certificate						

Mechanical Specification

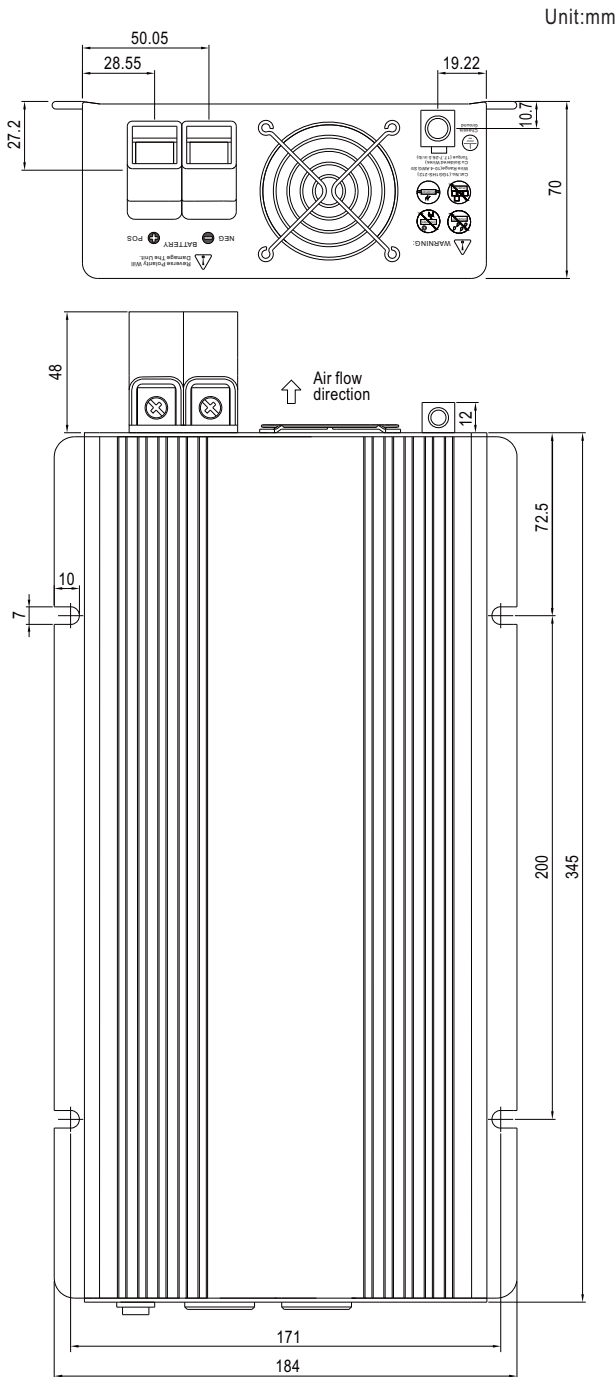

Derating Curve

