



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





TO-92



Pin Definition: SOT-223

1. Emitter
2. Collector
3. Base



Pin Definition: PRODUCT SUMMARY

1. Base
2. Collector
3. Emitter

BV_{CBO}	600V
BV_{CEO}	400V
I_C	1A
$V_{CE(SAT)}$	0.5V @ $I_C / I_B = 500mA / 100mA$

Features

- High BV_{ceo} , BV_{cbo}
- High current gain

Structure

- Epitaxial Planar Type

Ordering Information

Part No.	Package	Packing
TSC873CT B0G	TO-92	1,000pcs / Bulk
TSC873CT A3G	TO-92	2,000pcs / Ammo
TSC873CW R0G	SOT-223	2,500pcs / 13" Reel

Note: "G" denote for Halogen Free Product

Absolute Maximum Rating ($T_a = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V_{CBO}	600	V
Collector-Emitter Voltage	V_{CEO}	400	V
Emitter-Base Voltage	V_{EB}	9	V
Collector Current	DC	1	A
	Pulse	2	
Total Power Dissipation @ $T_A=25^\circ C$	TO-92	1	W
	SOT-223	1.2	
Operating Junction Temperature	T_J	+150	$^\circ C$
Operating Junction and Storage Temperature Range	T_{STG}	- 55 to +150	$^\circ C$

Electrical Specifications ($T_a = 25^\circ C$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$I_E = 100\mu A$	BV_{CBO}	600	--	--	V
Collector-Emitter Breakdown Voltage	$I_C = 1mA$	BV_{CEO}	400	--	--	V
Emitter-Base Breakdown Voltage	$I_E = 100\mu A$	BV_{EBO}	9	--	--	V
Collector-Base Cutoff Current	$V_{CB}=600V$	I_{CBO}	--	--	100	μA
Collector-Emitter Cutoff Current	$V_{CE} = 400V$	I_{CEO}	--	--	1	mA
Emitter-Base Cutoff Current	$V_{EB}=8V$	I_{EBO}	--	--	100	μA
Collector-Emitter Saturation Voltage	$I_C = 500mA, I_B = 100mA$	$V_{CE(SAT) 1}$	--	--	0.5	V
Collector-Emitter Saturation Voltage	$I_C = 1A, I_B = 250mA$	$V_{CE(SAT) 2}$	--	--	1	V
Base-Emitter Saturation Voltage	$I_C = 500mA, I_B = 100mA$	$V_{BE(SAT) 1}$	--	--	1	V
Base-Emitter Saturation Voltage	$I_C = 1A, I_B = 250mA$	$V_{BE(SAT) 2}$	--	--	1.2	V
DC Current Transfer Ratio	$V_{CE} = 10V, I_C = 250mA$	h_{FE}	80	--	--	
Trun-on Time	$V_{CC}=125V, I_C=1A, I_{B1}=I_{B2}=200mA$	T_{ON}	--	1	--	μS
Storage Time		T_{STG}	--	4	--	μS
Fall Time		T_{OFF}	--	0.7	--	μS

Electrical Characteristics Curve ($T_a = 25^\circ\text{C}$, unless otherwise noted)

Figure 1. Static Characteristics

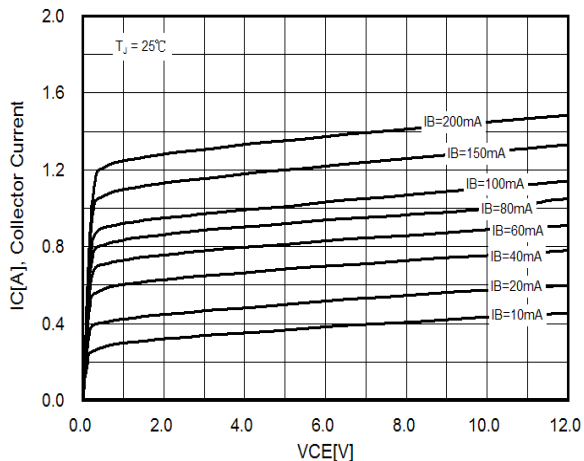


Figure 2. DC Current Gain

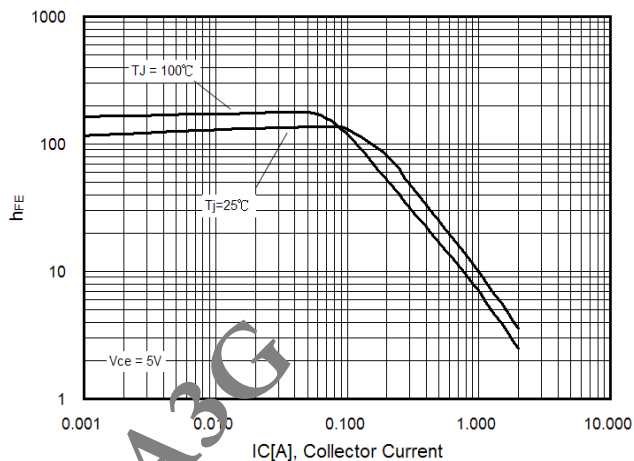


Figure 3. VCE(SAT) v.s. IC

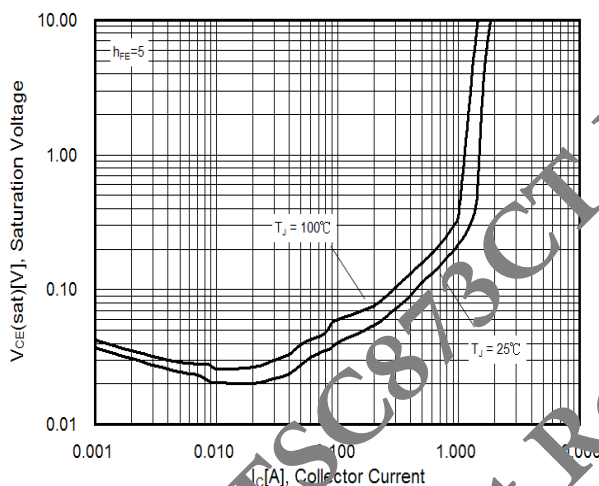


Figure 4. VBE(sat) vs IC

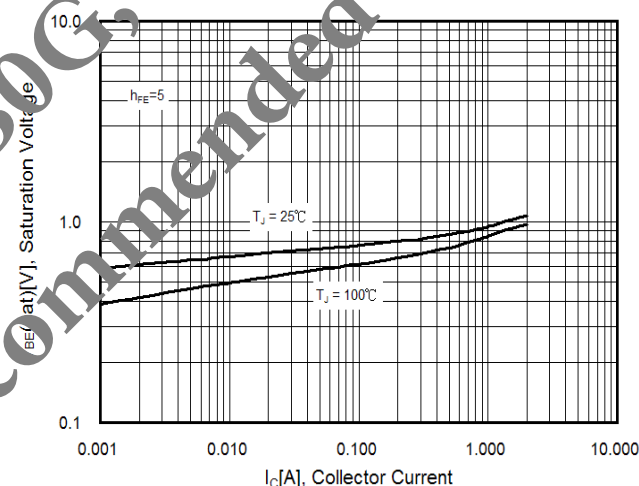


Figure 5. VBE(on) vs IC



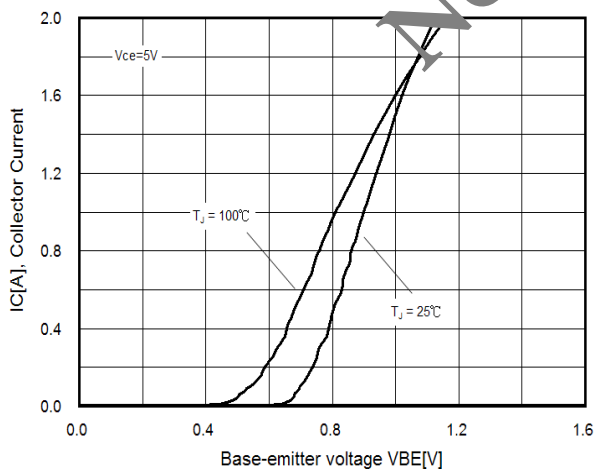


Figure 6. Safety Operation Area

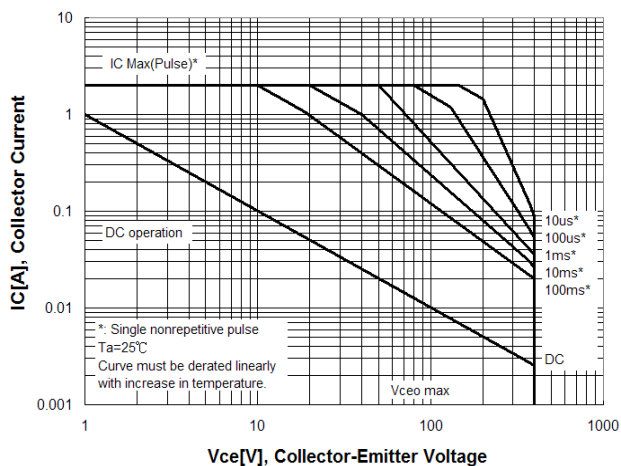

TO-92 Mechanical Drawing

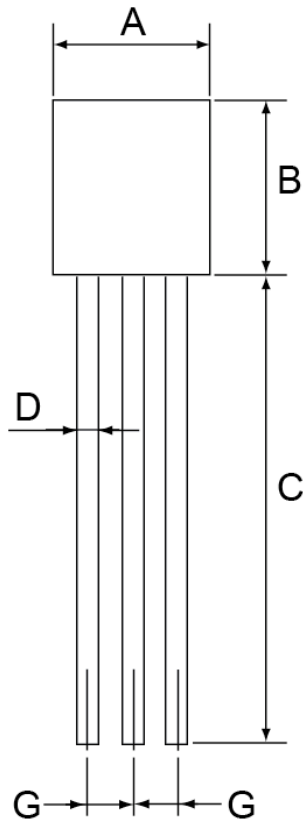

TO-92 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.30	4.70	0.169	0.185
B	4.30	4.70	0.169	0.185
C	14.30(typ)		0.563(typ)	
D	0.43	0.49	0.017	0.019
E	1.18	1.28	0.046	0.050
F	3.30	3.70	0.130	0.146
G	1.27	1.31	0.05	0.051
H	0.37	0.43	0.015	0.017

TSC873CT B0G, A3G
Not Recommended


Marking Diagram



- Y** = Year Code
- M** = Month Code for Halogen Free Product
 - O** =Jan **P** =Feb **Q** =Mar **R** =Apr
 - S** =May **T** =Jun **U** =Jul **V** =Aug
 - W** =Sep **X** =Oct **Y** =Nov **Z** =Dec
- L** = Lot Code


#1

SOT-223 Mechanical Drawing

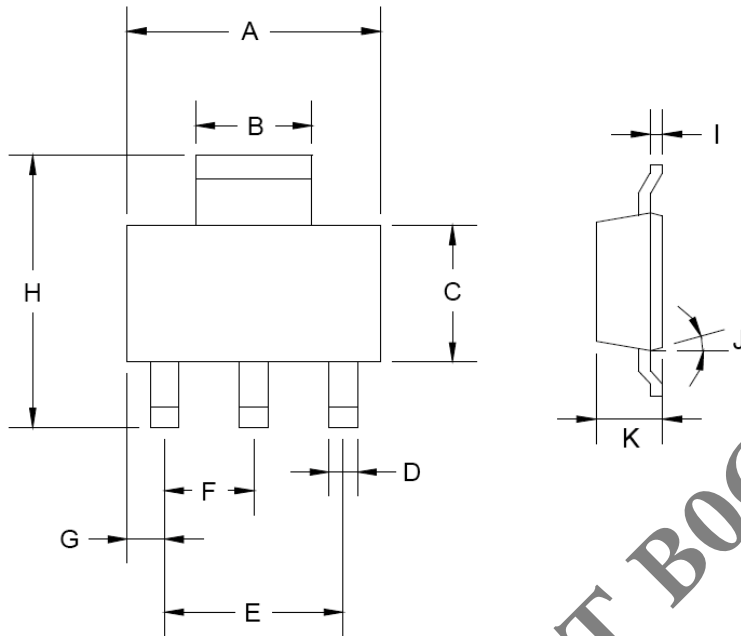

SOT-223 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.350	6.850	0.250	0.270
B	2.900	3.100	0.114	0.122
C	3.450	3.750	0.136	0.148
D	0.595	0.635	0.023	0.025
E	4.550	4.650	0.179	0.183
F	2.250	2.350	0.088	0.093
G	0.635	1.035	0.032	0.041
H	6.700	7.300	0.263	0.287
I	0.250	0.355	0.010	0.014
J	10°	16°	10°	16°
K	1.550	1.800	0.061	0.071

Marking Diagram



- Y** = Year Code
- M** = Month Code for Halogen Free Product
 - O** =Jan
 - P** =Feb
 - Q** =Mar
 - R** =Apr
 - S** =May
 - T** =Jun
 - U** =Jul
 - V** =Aug
 - W** =Sep
 - X** =Oct
 - Y** =Nov
 - Z** =Dec
- L** = Lot Code

**TSC873CT B0G, A3G
Not Recommended**

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.