



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Specification

Small Form Factor Pluggable

Duplex LC Receptacle – SFP

Optical Transceivers

1000BASE-SX

1250Mbit/s



Ordering Information

T S P - S x C H 1 - C 1 1


Category

SD : DDMI Product

Voltage / Temperature

1 : 3.3V / +0°C~ +70°C

2 : 3.3V / -40 °C~ +85°C

| Model Name | Voltage | Category | Device type | Interface | SD/LOS | Temperature | Distance | Latch Color |
|---------------|---------|----------|-------------|---------------------|--------|---------------|---------------------|---|
| TSP-S1CH1-C11 | 3.3V | W/O DDMI | VCSEL / PIN | AC / AC Coupling | LVTTTL | + 0°C~ + 70°C | 550m (Table 1) | Black |
| TSP-S2CH1-C11 | | | | | | -40°C~ + 85°C | |  |

| Media | Wavelength | Fiber Core Dimension | Bandwidth | Fiber Type | Distance |
|------------------|------------|----------------------|-------------|------------|----------|
| Multi-Mode Fiber | 850nm | 50 μ m | 500 MHz* km | OM2 | 550m |
| | | 50 μ m | 400 MHz* km | | 500m |
| | | 62.5 μ m | 200 MHz* km | OM1 | 275m |
| | | 62.5 μ m | 160 MHz* km | | 220m |

Table 1

Features

- ROHS Compliant
- Standard Small Form Factor Pluggable Package – SFP MSA Compliant
- Gigabit Ethernet Standard (IEEE802.3Z 1000BASE-SX) Compliant
- Fibre Channel Standard (100-M5-SN-I and 100-M6-SN-I) Compliant
- Laser Class 1 Product – IEC60825-1 Compliant
- Standard Duplex LC Receptacle Optical Interface
- Single + 3.3 V Power Supply
- Differential LVPECL Data Input and Output
- LVTTTL Loss of Signal
- Serial ID through I²C Interface
- Low Power Consumption

Absolute Maximum Ratings

| Parameter | Symbol | Min | Typ | Max | Unit |
|-----------------------------|-----------------|-----|-----|-----------------|------|
| Storage temperature | T _S | -40 | | 85 | °C |
| Supply voltage | V _{CC} | 0 | | 4 | V |
| Operating Relative Humidity | - | 5 | | 95 | % |
| Input voltage | V _{IN} | 0 | | V _{CC} | V |

Operating Conditions

| Parameter | Symbol | Min | Typ | Max | Unit |
|--|-----------------|-----|-----|-----|------|
| Supply Voltage | V _{CC} | 3.1 | 3.3 | 3.5 | V |
| Operating Case temperature (TSP-S1CH1-C11) | T _C | 0 | - | 70 | °C |
| Operating Case temperature (TSP-S2CH1-C11) | | -40 | | 85 | |
| Total Current (Transmitter + Receiver) | I _{CC} | - | - | 250 | mA |


Transmitter Specifications ($V_{CC}=3.1V\sim 3.5V$; $T_C= 0^{\circ}C\sim 70^{\circ}C$ / $T_C= -40^{\circ}C\sim 85^{\circ}C$)

| Parameter | Symbol | Min | Typ | Max | Unit |
|------------------------------------|----------------------------|-----|-----|--------------|-------|
| Optical Characteristics | | | | | |
| Output Optical Power | P_{out} | -9 | -- | -3 | dBm |
| Extinction Ratio | ER | 9 | -- | -- | dB |
| Center Wavelength | λ_C | 830 | | 860 | nm |
| Spectral Width (RMS) | σ | -- | -- | 0.85 | nm |
| Rise/Fall time (20-80%) | $T_{r,f}$ | -- | -- | 260 | ps |
| Relative Intensity Noise | RIN | -- | -- | -117 | dB/Hz |
| Output Eye | Compliant with IEEE 802.3z | | | | |
| Max. P_{out} TX-DISABLE Asserted | P_{OFF} | -- | -- | -45 | dBm |
| Electrical Characteristics | | | | | |
| Differential Input Voltage | V_{DIFF} | 0.4 | -- | 2.0 | V |
| Tx_Disable_Input_High | V_{DISH} | 2.0 | -- | $V_{CC}+0.3$ | V |
| Tx_Disable_Input_Low | V_{DISL} | 0 | -- | 0.8 | V |
| Tx_Fault_Output_High | V_{FH} | 2.0 | -- | $V_{CC}+0.3$ | V |
| Tx_Fault_Output_Low | V_{FL} | 0 | -- | 0.8 | V |

Receiver Specifications ($V_{CC}=3.1V\sim 3.5V$; $T_C= 0^{\circ}C\sim 70^{\circ}C$ / $T_C= -40^{\circ}C\sim 85^{\circ}C$)


| Parameter | Symbol | Min | Typ | Max | Unit |
|--|-------------|-----|-----|--------------|------|
| Optical Characteristics | | | | | |
| Optical Input Power-maximum | P_{SATIN} | 0 | -- | -- | dBm |
| Receiver Sensitivity (PRBS= 2^7-1 ; BER $\leq 10^{-12}$) | P_{SEN} | -- | -- | -18 | dBm |
| Operating Center Wavelength | λ_C | 770 | | 860 | nm |
| Loss of Signal – De-asserted | P_{LD} | -- | -- | -18 | dBm |
| Loss of Signal - Asserted | P_{LA} | -35 | -- | -- | dBm |
| Loss of Signal - Hysteresis | P_{LH} | 0.5 | | 6 | dB |
| Electrical Characteristics | | | | | |
| Differential Output Voltage | V_{DIFF} | 0.4 | -- | 2.0 | V |
| Receiver Loss of Signal Output Voltage -Low | V_{LOSH} | 0 | -- | 0.8 | V |
| Receiver Loss of Signal Output Voltage -High | V_{LOSL} | 2 | -- | $V_{CC}+0.3$ | V |

Pin Definition and Descriptions

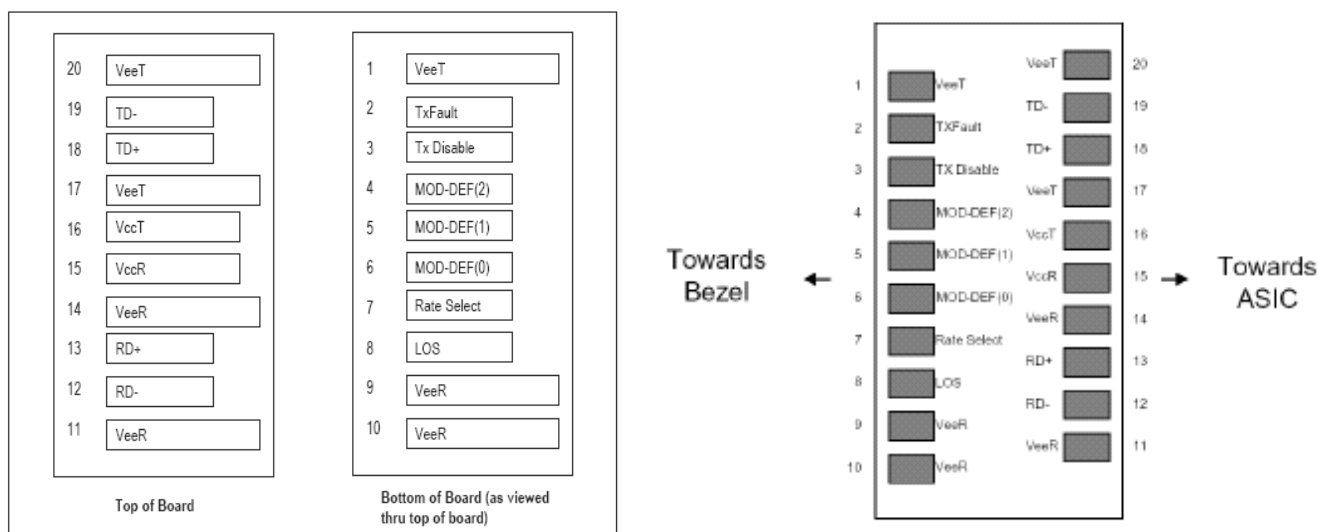

| Pin | Name | Input/Output Level | Description |
|-----|-------------|--------------------|---|
| 1 | VeeT | Input | Transmitter ground |
| 2 | TXFault | Output/LVTTL | Laser failure indication. High level indicates "laser failure". Externally pulled up |
| 3 | TXDisable | Input/LVTTL | Transmitter disable, High signal/open disables TX laser output. Low level enables TX output, internally pulled up. |
| 4 | MOD-DEF(2) | Input/output | Module definition 2, SDA, Data line for I2C bus. Externally pulled up |
| 5 | MOD-DEF(1) | Input | Module definition 1, SCL, Clock for I2C bus. Externally pulled up |
| 6 | MOD-DEF(0) | Output | Module definition 0, Module present. Ground inside module. |
| 7 | Rate Select | - | No connection. |
| 8 | LOS | Output/LVTTL | Receiver loss of signal indication. Low signal indicates optical signal is present at RX input. Should be Externally pulled up. |
| 9 | VeeR | Input | Receiver ground |
| 10 | VeeR | Input | Receiver ground |
| 11 | VeeR | Input | Receiver ground |
| 12 | RD - | Output/LVPECL | Inverted receiver data output (AC coupled) |
| 13 | RD + | Output/LVTTL | Non-inverted receiver data output (AC coupled) |
| 14 | VeeR | Input | Receiver ground |
| 15 | VccR | Input | Receiver power supply |
| 16 | VccT | Input | Transmitter power supply |
| 17 | VeeT | Input | Transmitter ground |
| 18 | TD + | Input/LVPECL | non-inverted transmitter data input (AC coupled) |
| 19 | TD - | Input/LVPECL | Inverted transmitter data input (AC coupled) |
| 20 | VeeT | Input | Transmitter ground |

Recommended Circuit Diagram

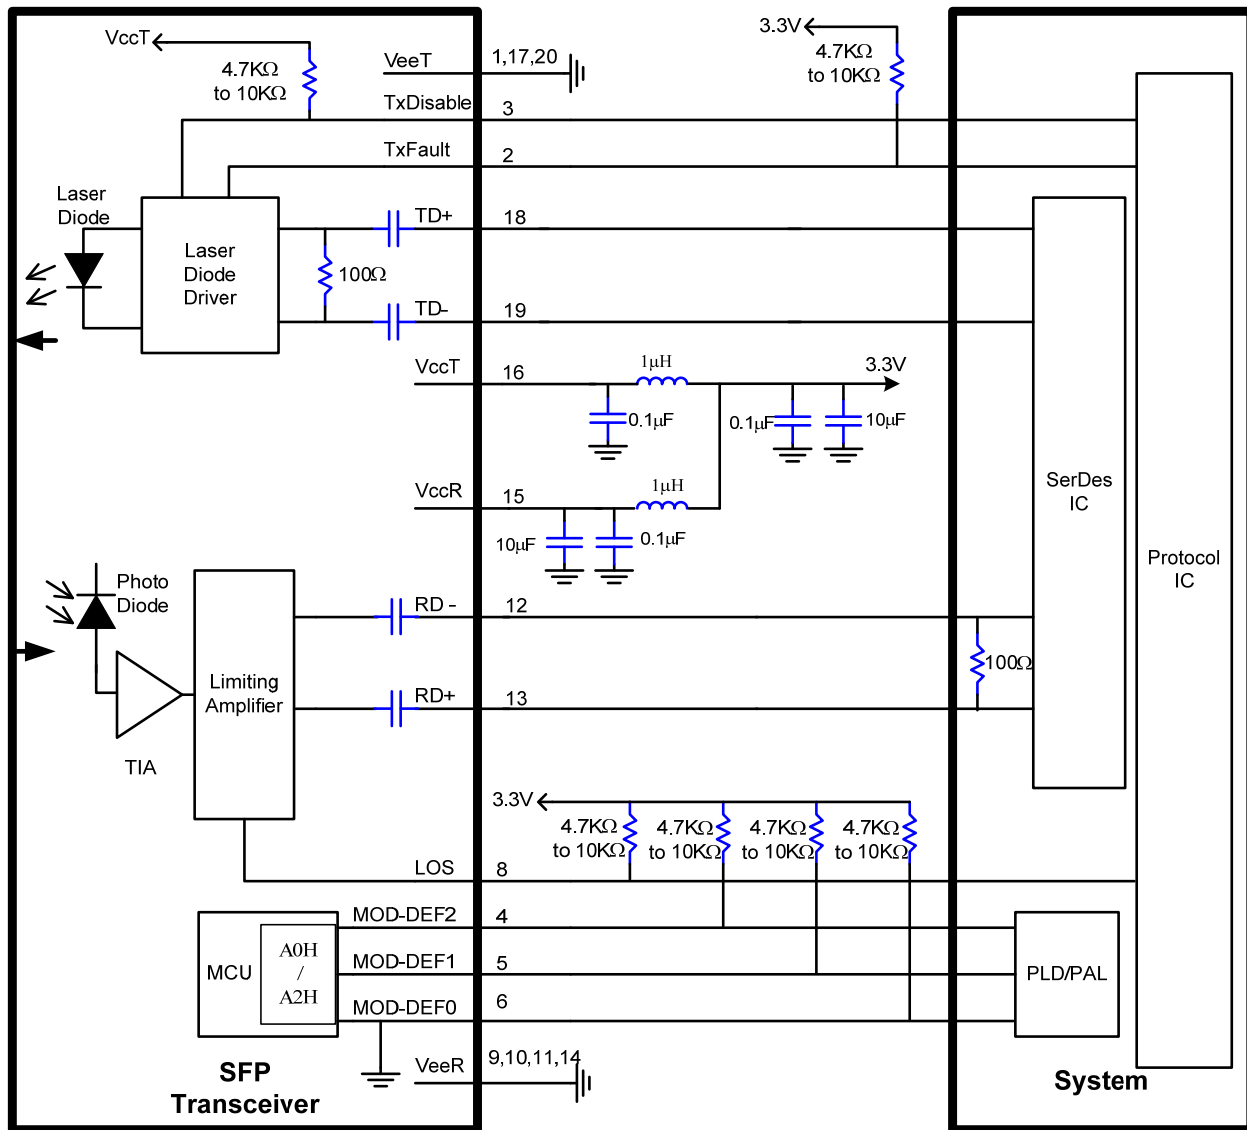



SFP Gigabit Ethernet Transceiver

PRODUCT NUMBER: TSP-SxCH1-C11

Content in 2-Wire Address A0H

| Address | HEX | Name of Field | Description |
|---------|---|--------------------------------------|------------------------------|
| 00 | 03 | Identifier | SFP |
| 01 | 04 | Extended Identifier | SFP |
| 02 | 07 | Connector type | LC |
| 03 | 00 | Infiniband Compliance Codes | Not compliant |
| 04 | 00 | SONET Compliance Codes | Not compliant |
| 05 | 00 | SONET Compliance Codes | Not compliant |
| 06 | 01 | Ethernet Compliance Codes | 1000BASE-SX |
| 07 | 20 | Fiber Channel link length | Intermediate distance |
| 08 | 40 | Fiber Channel transmitter technology | Shortwave laser w/o OFC (SN) |
| 09 | 0C | Fiber Channel transmission media | Multimode M5/M6 |
| 10 | 01 | Fiber Channel speed | 100 MBytes/sec |
| 11 | 01 | Encoding codes: | 8B/10B |
| 12 | 0D | Nominal Bit Rate (units of 100Mbps) | 1300Mbps |
| 13 | 00 | Rate identifier | Unspecified |
| 14 | 00 | Link length supported for 9um fiber | N/A (units of km) |
| 15 | 00 | Link length supported for 9um fiber | N/A (units of 100m) |
| 16 | 37 | Link length supported for 50um,OM2 | 550m (units of 10m) |
| 17 | 1B | Link length supported for 62.5um,OM1 | 275m (units of 10m) |
| 18 | 00 | Link length supported for copper | N/A (units of 1m) |
| 19 | 00 | Link length supported for 50um,OM3 | N/A (units of 10m) |
| 20 ~ 35 | 46,4F,52,4D,45,52,49,43, 41,4F,45,20,20,20,20,20 | Vendor Name | FORMERICA OE |
| 36 | 00 | Unallocated | |
| 37 ~ 39 | 00,00,00 | Vendor OUI | Unspecified |
| 40 ~ 55 | 54,53,50,2D,53,31(32),43,48,31, 2D,43,31,31,20,20,20 | Part Number | TSP-S1(2)CH1-C11 |
| 56 ~ 59 | 00,00,00,00 | Vendor Revision number | Unspecified |
| 60 ~ 61 | 03,52 | Laser Wavelength | 850nm |
| 62 | 00 | Unallocated | |
| 63 | | CC_BASE: | Check sum of byte 0 ~ 62 |
| 64 | 00 | Options | |
| 65 | 1A | Options | TX-DIS, TX_FAULT, RX-LOS |
| 66 | 00 | Bit Rate, max. | Unspecified |
| 67 | 00 | Bit Rate, min. | Unspecified |
| 68 ~ 83 | Serial Number | Serial Number | |
| 84 ~ 89 | yy/mm/dd | Date Code | |
| 90 ~ 91 | 20,20 | Vendor specific lot code | Unspecified |
| 92 | 00 | Diagnostic Monitoring Type | W/O DDMI |
| 93 | 00 | Enhanced Options (soft) | Unallocated |
| 94 | 00 | SFF-8472 Compliance | Not Included |
| 95 | | CC_EXT | Check sum of byte 64 ~ 94 |
| 96~127 | | Vendor specific | |

Mechanical Outlines

(Unit : mm)

