



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







REV. Status  
 PRELIMINARY  
 04/24/00 LL  
 PRELIMINARY 1  
 MOVED MARKING  
 ON ISO DWG.  
 05/11/00 LL  
 PRELIMINARY 2  
 CHANGED DESC.  
 10/17/00 LL

ADSL transformer designed for use with ltx IC chip Apollo II (CPE Side)


- A. Electrical Specifications (@ 25°C)
1. Primary (Line side) Impedance; 100Ω
  2. Secondary (IC side) Impedance; 100Ω
  3. Frequency Response; ±0.5dB @ 100KHz to 1.1MHz, 0dBm
  4. Insertion Loss; 1.0dB MAX @ 100KHz and 1.1MHz, 0dBm
  5. Longitudinal Balance; 40dB MIN @ 30KHz to 1.1MHz, 0dBm
  6. Primary Open Circuit Inductance; 440μH ±10% @ 10KHz, 0.1Vrms Measured (1-4) with 2 and 3 shorted
  7. Leakage Inductance; 10μH MAX @ 300KHz, 0.1Vrms Measured (1-4) with 2 & 3, 8 & 9 and 7 & 10 shorted
  8. Total Harmonic Distortion; -72dB MAX @ 10KHz
  9. DC Resistance; (1-4)=1.0Ω MAX, with 2 & 3 shorted (7-10)=1.0Ω MAX, with 8 & 9 shorted
  10. Turns Ratio; (1-4):(7-10)=1:1.00±2%  
2 & 3, and 8 & 9 shorted
  11. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec

- B. Marking; TTC-4052, TAMURA, date code and country of origin  
 C. Safety; Complies with UL1950 3rd Edition and IEC950  
 D. Schematic;

MODEL NUMBER  
**TTC-4052**

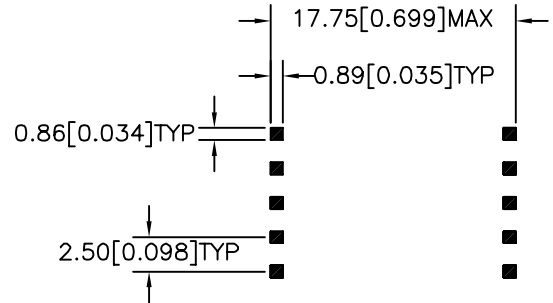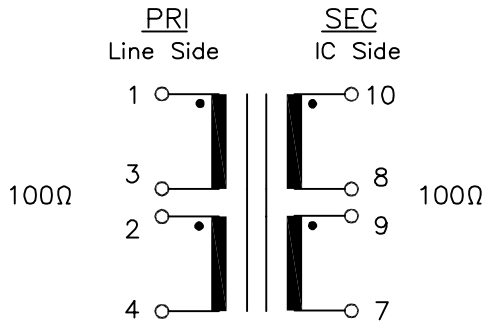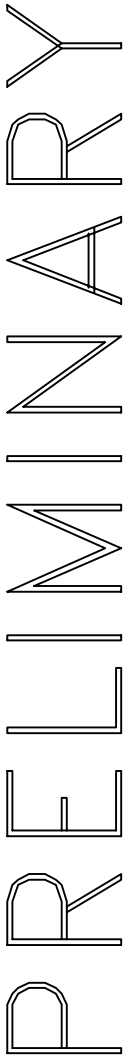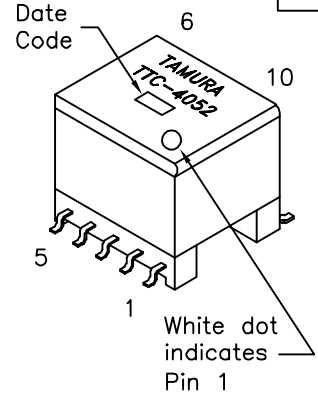

E. Mechanical Specifications;

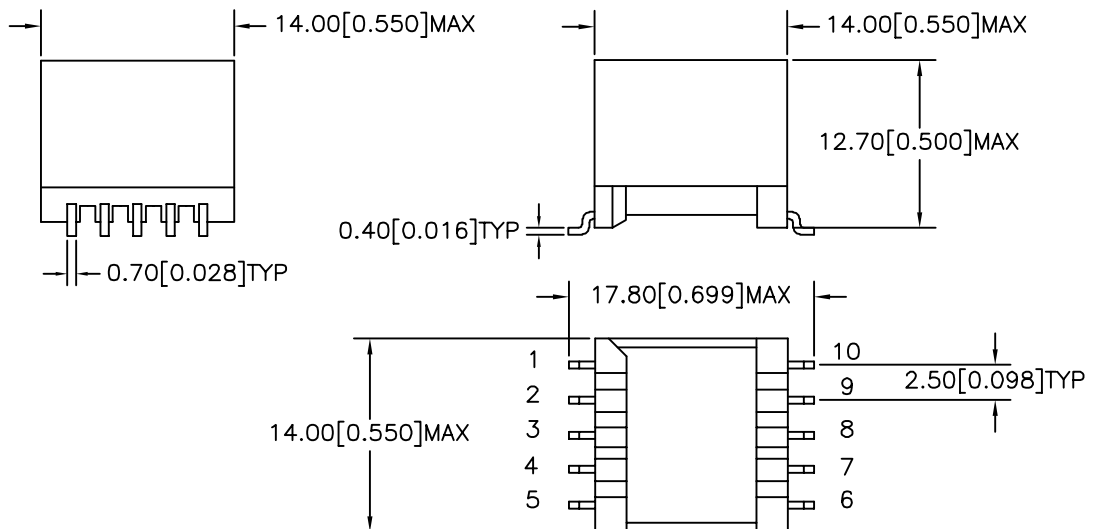

PREPARED BY:

D. Rund

ENGINEER:

L. Le

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.  
 P-A1-12475  
 ACAD\TTC\A1124751.DWG

REV  
 PR2

ADSL  
 TRANSFORMER

**TTC-4052**

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE  
 SUBJECT TO CHANGE WITHOUT  
 PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
 (909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: 2/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.