



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# TEWA TEMPERATURE SENSORS

HIGH PRECISION NTC THERMISTORS AND TEMPERATURE SENSORS

## Specification of Epoxy Coated NTC Thermistor

PART NUMBER: **TTS-10KC4-BG**

No. of pages: 2


Date: **24.09.2015**

Revision: **00**

**FEATURES:**

Sensing Element	Epoxy Coated NTC Thermistor
No-load resistance at 25°C	10000 Ω
Tolerances from 0°C to 70°C	± 0.2°C
Beta(25/85) Constant	3691K ± 1%
Operating temperature range	-40°C ÷ 125°C
Response Time in well stirred liquid bath	~1 sec.
Response Time in still air	~10 sec.
Typical Dissipation Constant in still air	0.75mW/°C
<b>RoHS Compatible</b>	<b>YES</b>

**DRAWING:**

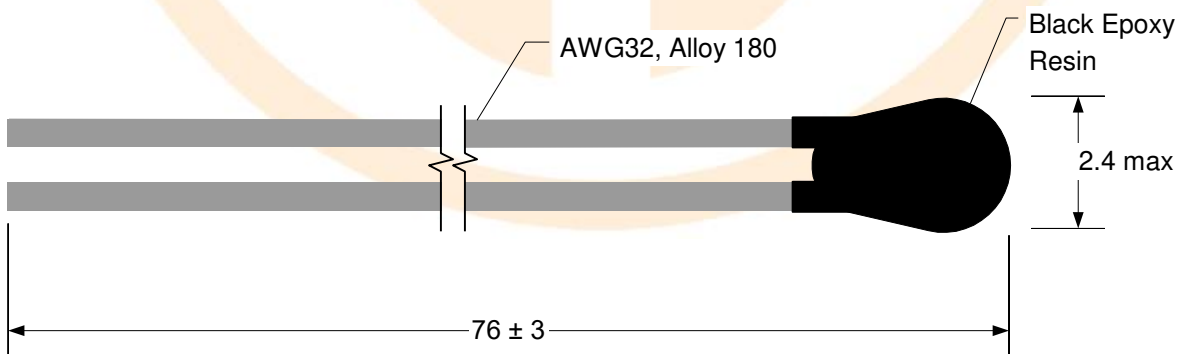

# TEWA TEMPERATURE SENSORS

HIGH PRECISION NTC THERMISTORS AND TEMPERATURE SENSORS

PART NUMBER: **TTS-10KC4-BG**

R/T CHARACTERISTIC:

Resistance <b>10 000</b> Ohms at 25°C				
Tolerance $\pm 0.2^\circ\text{C}$ from 0°C to 70°C				
B(25/85) <b>3691</b> $\pm 1\%$				
Material no. <b>4</b>				
Temp (°C)	R/R(25C) (Ohms)		Temp (°C)	R Value (Ohms)
-40	23,983000		-40	239830
-35	17,928000		-35	179280
-30	13,523000		-30	135230
-25	10,289000		-25	102890
-20	7,893000		-20	78930
-15	6,103000		-15	61030
-10	4,754900		-10	47549
-5	3,731600		-5	37316
0	2,949000		0	29490
5	2,346200		5	23462
10	1,878700		10	18787
15	1,513600		15	15136
20	1,226800		20	12268
25	1,000000		25	<b>10000</b>
30	0,819660		30	8196,6
35	0,675390		35	6753,9
40	0,559370		40	5593,7
45	0,465570		45	4655,7
50	0,389330		50	3893,3
55	0,327070		55	3270,7
60	0,275990		60	2759,9
65	0,233870		65	2338,7
70	0,199000		70	1990
75	0,170000		75	1700
80	0,145790		80	1457,9
85	0,125483		85	1254,83
90	0,108395		90	1083,95
95	0,093960		95	939,6
100	0,081719		100	817,19
105	0,071303		105	713,03
110	0,062409		110	624,09
115	0,054792		115	547,92
120	0,048246		120	482,46
125	0,042603		125	426,03
130	0,037723		130	377,23
135	0,033492		135	334,92
140	0,029812		140	298,12
145	0,026604		145	266,04
150	0,023798		150	237,98