



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Self-Laminating Labels for Wire and Cable

- Vinyl material with white print-on area
- Clear overlamine protects legend
- Print with LS6-RWBLK wax ribbon

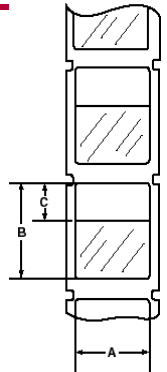


| Part Number | Label Width x Height A x B In. (mm) | Print-On Height C In. (mm) | Nominal Cable Diameter Range In. (mm) | Typical UTP Cable | Typical Fiber Optic Cable | Typical Electrical (THHN) | Labels/ Roll | Std. Pkg. Qty.* | Std. Ctn. Qty. |
|-------------|---|----------------------------------|--|-------------------|---------------------------|---------------------------|--------------|-----------------|----------------|
| TWS-6V | 0.50 x 0.75 (12.7 x 19.1) | 0.38 (9.5) | 0.12 (3.1) | — | — | 12 AWG | 500 | 1 Roll | 10 Rolls |
| TWS-7V | 1.00 x 0.75 (25.4 x 19.1) | 0.38 (9.5) | 0.12 (3.1) | — | — | 12 AWG | 250 | | |
| TWS-4V | 0.50 x 1.00 (12.7 x 25.4) | 0.38 (9.5) | 0.12 - 0.20 (3.1 - 5.0) | — | 2-4 Strand | 12-10 AWG | 400 | | |
| TWS-5V | 1.00 x 1.00 (25.4 x 25.4) | 0.38 (9.5) | 0.12 - 0.20 (3.1 - 5.0) | — | 2-4 Strand | 12-10 AWG | 250 | | |
| TWS-1V | 0.50 x 1.25 (12.7 x 31.8) | 0.50 (12.7) | 0.16 - 0.24 (4.0 - 6.1) | 4 Pair | 2-8 Strand | 8 AWG | 350 | | |
| TWS-2V | 1.00 x 1.25 (25.4 x 31.8) | 0.50 (12.7) | 0.16 - 0.24 (4.0 - 6.1) | 4 Pair | 2-8 Strand | 8 AWG | 250 | | |
| TWS-3V | 1.50 x 1.25 (38.1 x 31.8) | 0.50 (12.7) | 0.16 - 0.24 (4.0 - 6.1) | 4 Pair | 2-8 Strand | 8 AWG | 250 | | |
| TWS-40V | 2.00 x 1.50 (50.8 x 38.1) | 0.50 (12.7) | 0.16 - 0.32 (4.0 - 8.1) | 4 Pair | 2-18 Strand | 8-6 AWG | 250 | | |
| TWS-10V | 1.00 x 2.50 (25.4 x 63.5) | 0.75 (19.1) | 0.24 - 0.56 (6.1 - 14.2) | 25 Pair | 8-84 Strand | 6 AWG-2/0 | 100 | | |
| TWS-11V | 1.50 x 2.50 (38.1 x 63.5) | 0.75 (19.1) | 0.24 - 0.56 (6.1 - 14.2) | 25 Pair | 8-84 Strand | 6 AWG-2/0 | 100 | | |
| TWS-13V | 1.50 x 4.00 (38.1 x 101.6) | 1.00 (25.4) | 0.32 - 0.96 (8.1 - 24.3) | 25 Pair | 42-156 Strand | 4 AWG-500 MCM | 100 | | |

* Order number of rolls required in multiples of Std. Pkg. Qty.

Heat Shrink Labels for Wire and Cable

- Flattened Polyolefin Material
- Service Temperature Range: -22°F to 220°F (-30°C to 105°C)
- Shrink Ratio 3:1 @ 212°F (100°C)
- Flammability meets UL Standard 224 for flammability
- Color: White
- Print with LS6-RWBLK wax ribbon

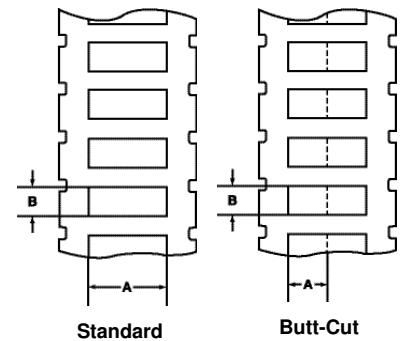

| Part Number | Tubing O.D. In. (mm) | Width x Height A x B In. (mm) | Nominal Cable Diameter Range In. (mm) | Typical UTP Cable | Typical Fiber Optic Cable | Typical Electrical (THHN) | Labels/ Roll | Std. Pkg. Qty.* | Std. Ctn. Qty. |
|-------------|-------------------------|-------------------------------------|--|-------------------|---------------------------|---------------------------|--------------|-----------------|----------------|
| THSW-1• | 0.13 (3.2) | 0.50 x 0.25 (12.7 x 6.4) | 0.04 - 0.13 (1.1 - 3.2) | — | — | 18-12 AWG | 200 | 1 Roll | 10 Rolls |
| THSW-2 | 0.13 (3.2) | 1.00 x 0.25 (25.4 x 6.4) | 0.04 - 0.13 (1.1 - 3.2) | — | — | 18-12 AWG | 100 | | |
| THSW-6• | 0.19 (4.8) | 0.50 x 0.34 (12.7 x 8.5) | 0.06 - 0.19 (1.6 - 4.8) | — | 2 Strand | 18-10 AWG | 200 | | |
| THSW-7 | 0.19 (4.8) | 1.00 x 0.34 (25.4 x 8.5) | 0.06 - 0.19 (1.6 - 4.8) | — | 2 Strand | 18-10 AWG | 100 | | |
| THSW-3• | 0.25 (6.4) | 0.50 x 0.44 (12.7 x 11.2) | 0.08 - 0.25 (2.1 - 6.4) | 4 Pair | 2-8 Strand | 18-8 AWG | 200 | | |
| THSW-4 | 0.25 (6.4) | 1.00 x 0.44 (25.4 x 11.2) | 0.08 - 0.25 (2.1 - 6.4) | 4 Pair | 2-8 Strand | 18-8 AWG | 100 | | |
| THSW-5 | 0.50 (12.7) | 1.00 x 0.84 (25.4 x 21.3) | 0.17 - 0.50 (4.2 - 12.7) | 4 Pair | 4-60 Strand | 8-1 AWG | 100 | | |

•Indicates butt-cut style label

*Order number of rolls required in multiples of Std. Pkg. Qty.