



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TY - 141P

Description:

These transformers operate in the 200 Hz to 15,000 Hz range, making them suitable for a broad application spectrum in the audio industry. These devices are used in line matching, telephone coupling, pulse trigger, driver, interstage, output, isolation and input applications.

Operating Temperature Range: 0° C to 105° C

Electrical Specifications at 25° C:

- | | |
|-------------------------------|---------------------------------|
| 1. Primary Impedance: | 10000Ω CT |
| 2. Secondary Impedance: | 10000Ω CT |
| 3. Output: | 100mW |
| 4. Primary DC Unbalance: | 4 mA |
| 5. Frequency Response: | ± 2dB from 200 to 15,000 Hz |
| 6. Impedance Matching: | 10% over full frequency range |
| 7. Longitudinal Balance | > 45dB |
| 8. Insertion Loss @ 1K Hz: | < 1.5dB |
| 9. Return Loss: | > 26dB |
| 10. Total Harmonic Distortion | < 0.5% between 275Hz and 3.5KHz |
| 11. DCR: | |
| Primary (1-3) | 820Ω Nominal |
| Secondary (4-6) | 1070Ω Nominal |
| 12. Turns Ratio: | 1 : 1 |
| 13. Dielectric Strength | 1500V Pri to Sec to Core |


Construction:

Bobbin has plug-in terminals which are spaced to provide fixed mounting centers. Pins are rugged, minimizing the incidence of bent pins from handling.

Outline Dimensions:



- A. Dimensions: As figures show
 B. PIN DIM. : .042" x .020"
 C. Weight. : 0.51 oz.

Schematic:



RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>

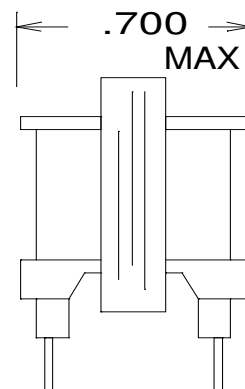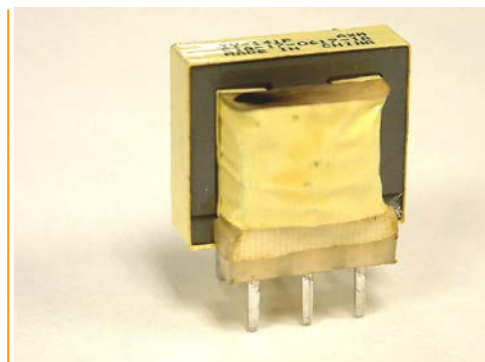

DOT ABOVE #1 PIN
ON BOBBIN FLANGE

