

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Core **U30/25/16**

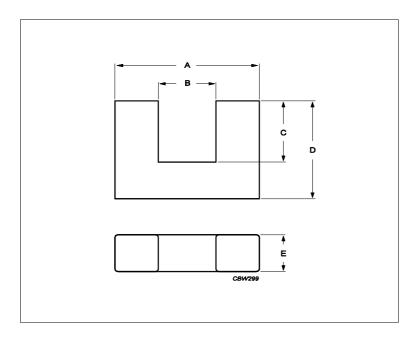

Effective parameters					
	Parameter	Value	Unit		
Σ(I/A)	Σ(I/A) core factor (C1)		mm ⁻¹		
Ve	effective volume	17900	mm³		
Le	effective length	111	mm		
Ae	effective area	161	mm²		
Amin	minimum area		mm²		
m	U30/25/16	≈ 43	g/pcs		

Dimensions for product: U30/25/16						
	Nom	Tol +	Tol -	Max	Min	Unit
Α	31.30	0.70	0.70	32.00	30.60	mm
В	10.50	0.50	0.50	11.00	10.00	mm
С	14.90	0.40	0.40	15.30	14.50	mm
D	25.30	0.20	0.20	25.50	25.10	mm
E	16.00	0.50	0.10	16.50	15.90	mm

Inductance factor						
Material	Value	Tol +	Tol -	Unit		
3C90	3700	25%	25%	nH/turns²		
3C94	3700	25%	25%	nH/turns²		

Power loss: 3C90					
Measuring conditions			Max	Unit	
25 kHz	200 mT	100 °C	2.100	W/set	
Power loss: 3C94					
Measuring conditions			Max	Unit	
100 kHz	200 mT	100 °C	8.900	W/set	

Bsat						
	Measuring conditions			Min	Unit	
25 kHz	250 A/m	100 °C	3C90	320	mT	
25 kHz	250 A/m	100 °C	3C94	320	mT	