



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# UBX-310D

## Intel® Celeron® Quad Core J1900 SoC with Multiple I/Os Fanless Box PC



### Features

- Intel Bay Trail Quad Core J1900, 2.0GHz up to 2.42GHz
- DDR3L 1333 MHz SO-DIMM memory support up to 8GB
- Display : VGA, HDMI
- Support 1 x 2.5" SATA HDD Bay and 1 x mSATA
- Multiple I/O: 5 x USB 2.0, 1 x LAN, 3 x COM, 1 x RJ11, 1 x LPT
- Support 1 x Full-size MiniPCIe
- Lockable DC jack design
- Optional VESA
- Supports WISE-PaaS/RMM and Embedded Software APIs



### Introduction


UBX-310D, an intelligent, fanless embedded system powered by Intel® Celeron™ J1900 Quad Core low power processor with multiple I/O interface. The new generation Intel® Celeron™ processor brings 300% improvement on processing power and 300% on graphics performance than previous generation Intel® Atom™ processors. These low-power platforms provide energy-efficient and environmentally responsible solutions, and serve applications targeted at factory automation, machine automation, retail, kiosks, and self-service applications.

### Specifications

Processor System	CPU	Intel Bay Trail Quad Core J1900
	Max. Speed	2.0 GHz, Turbo Boost up to 2.42GHz
	L2 Cache	2 MB
	BIOS AMI	AMI EFI 64Mbit SPI
Memory	Technology	Single channel DDR3L 1333MHz SDRAM
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Controller	Integrated Intel HD Graphics engine
	HDMI	Up to 1920 x 1080 (@60Hz)
	VGA	Up to SXGA 2560 x 1600 (@60Hz)
Ethernet	LAN1	1 x RJ45, 10/100/1000 Mbps Realtek 8111E GbE
Audio	Interface	Realtek ALC269, Line-out and Mic-in
I/O Interface	Serial Port	3 x RS-232 ports, COM3 support 5V & 12V by order
	USB	5 x USB 2.0 port
	LPT	1 x LPT
	RJ11	1 x RJ11, cash drawer, 24V default, 12V buy order
Other	Watchdog	255-level timer interval, setup by software
Expansion	Mini PCIe1	1 x Full-size Mini PCIe, supports WWAN module
Storage	HDD	1 x SATA HDD Bay for 2.5" device
	Solid State Disk	1 x mSATA
Software Support	Microsoft Windows	Windows Embedded POSReady 7, Windows 7 Pro Embedded, Windows 8.1 Pro Embedded (64-bit)
	Linux	Linux Kernel 3.13 or above (by project)
Power Requirements	Power Type	ATX mode
	Power Input Voltage	12 VDC, ± 10%
	Power Adapter	AC to DC, DC12V / 5A, 60W (Optional)
Mechanical	Construction	Steel
	Dimensions (W x H x D)	245 x 45 x 185 mm
	Weight	2.0 kg
Environment	Operating Temperature	With 2.5-inch hard disk 0 ~ 40° C (32 ~ 104° F) with 0.7 m/s air flow
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	90% @ 40° C (non-condensing)
	Vibration During Operation	With HDD: 0.5 Grms, IEC 60068-2-64, random, 5-500Hz, 3 axes, 1hr/axis
	Shock During Operation	With HDD: 10 G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CCC/BSMI/CE/FCC
	Safety	CCC/BSMI/CB/UL

## Dimensions

Unit: mm

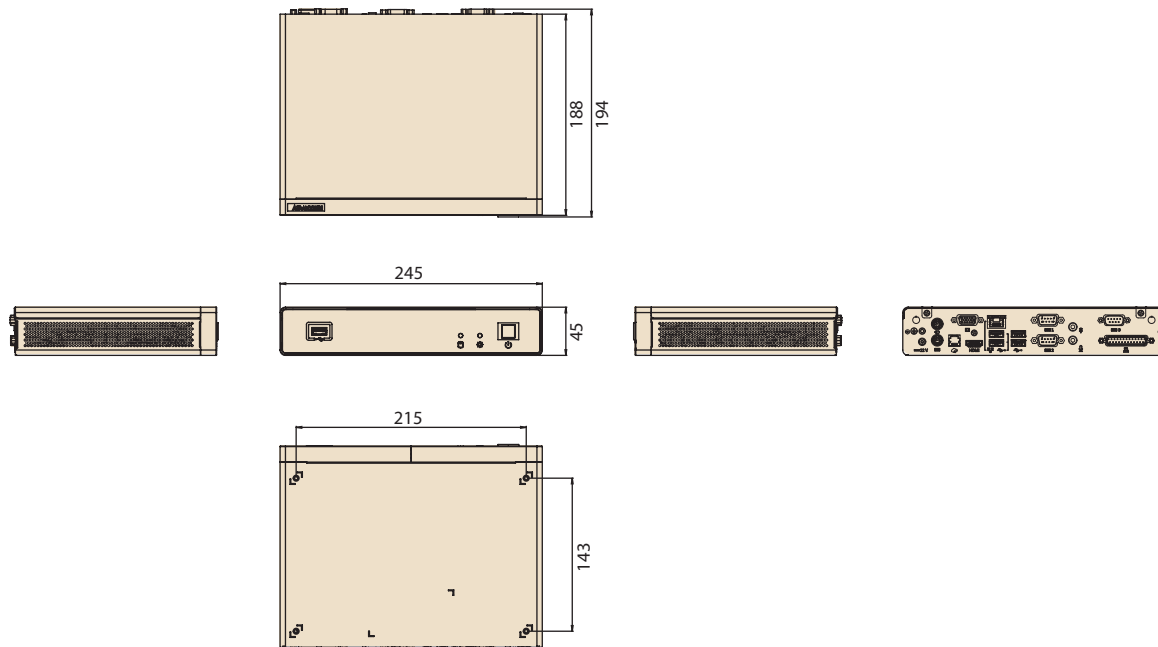


## Ordering Information

Part No.	Description
UBX-310D-LOB0E	Intel Celeron J1900, Fanless, RJ11, LPT
UBX-310D-LHB0E	Intel Celeron J1900, Fanless, RJ11, LPT with 2G RAM, 500G HDD

## Installation Accessory

Part No.	Description
HIP-33B-MOUNT1E	VESA MOUNT

## Fully- Integrated I/O

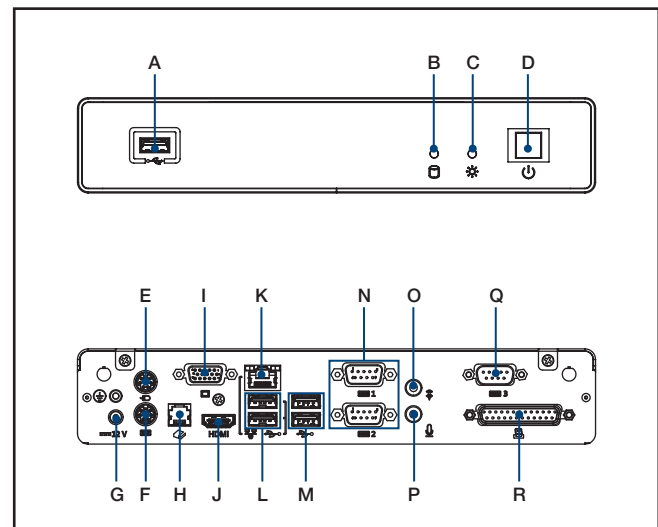

- |                 |             |
|-----------------|-------------|
| A. USB          | J. HDMI     |
| B. HDD LAMP     | K. LAN      |
| C. POWER LAMP   | L. USBx2    |
| D. POWER SWITCH | M. USBx2    |
| E. MOUSE        | N. COM 1/2  |
| F. KEYBOARD     | O. LINE OUT |
| G. DC IN        | P. MIC      |
| H. RJ11         | Q. COM 3    |
| I. VGA          | R. LPT      |