



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# ALUMINUM ELECTROLYTIC CAPACITORS


nichicon

# UCL

Chip Type, Low Impedance





- Chip type, low impedance, temperature range up to +105°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

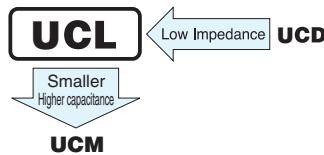

## ■ Specifications

Item	Performance Characteristics																			
Category Temperature Range	– 55 to +105°C																			
Rated Voltage Range	6.3 to 50V																			
Rated Capacitance Range	10 to 2200μF																			
Capacitance Tolerance	± 20% at 120Hz, 20°C																			
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.																			
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table>						Rated voltage (V)	6.3	10	16	25	35	50	tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10
Rated voltage (V)	6.3	10	16	25	35	50														
tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10														
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio ZT / Z20 (MAX.)</td> <td>Z–25°C / Z+20°C 3 Z–55°C / Z+20°C</td> <td>2 3 4</td> <td>2 3 4</td> <td>2 3 3</td> <td>2 3 3</td> <td>2 3 3</td> </tr> </tbody> </table>						Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio ZT / Z20 (MAX.)	Z–25°C / Z+20°C 3 Z–55°C / Z+20°C	2 3 4	2 3 4	2 3 3	2 3 3	2 3 3
Rated voltage (V)	6.3	10	16	25	35	50														
Impedance ratio ZT / Z20 (MAX.)	Z–25°C / Z+20°C 3 Z–55°C / Z+20°C	2 3 4	2 3 4	2 3 3	2 3 3	2 3 3														
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C.</p> <table border="1"> <thead> <tr> <th>Capacitance Change</th> <th>Within ± 30% of the initial capacitance value</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>						Capacitance Change	Within ± 30% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value								
Capacitance Change	Within ± 30% of the initial capacitance value																			
tan δ	200% or less than the initial specified value																			
Leakage current	Less than or equal to the initial specified value																			
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																			
Resistance to soldering heat	<p>The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.</p> <table border="1"> <thead> <tr> <th>Capacitance Change</th> <th>Within ± 10% of the initial capacitance value</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>						Capacitance Change	Within ± 10% of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value								
Capacitance Change	Within ± 10% of the initial capacitance value																			
tan δ	Less than or equal to the initial specified value																			
Leakage current	Less than or equal to the initial specified value																			
Marking	Black print on the case top.																			


## ■ Chip Type

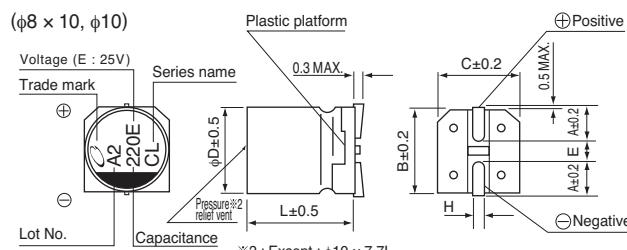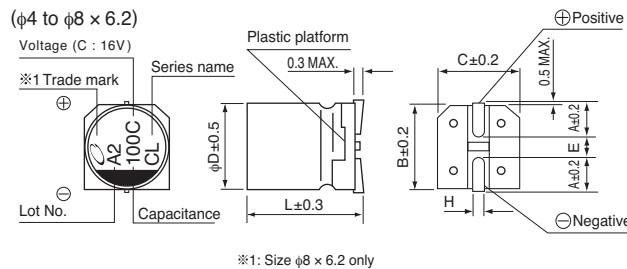

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

● Dimension table in next page.

## Type numbering system (Example : 16V 100μF)

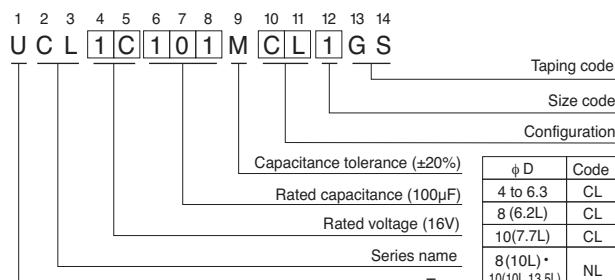

Ø D x L	4 x 5.8	5 x 5.8	6.3 x 5.8	6.3 x 7.7	8 x 6.2	8 x 10	10 x 7.7	10 x 10	10 x 13.5
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5	4.5	4.5
L	5.8	5.8	5.8	7.7	6.2	10	7.7	10	13.5
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1				

## UCL

## ■ Specifications

Cap. (μF)	V	6.3			10			16			25			35			50					
		Code	0J		1A		1C		4 x 5.8	0.85	160	4 x 5.8	0.85	160	● 4 x 5.8	0.85	160	5 x 5.8	0.36	240	1V	
10	100							4 x 5.8	0.85	160	4 x 5.8	0.85	160	● 4 x 5.8	0.85	160	5 x 5.8	0.36	240			
22	220	4 x 5.8	0.85	160	4 x 5.8	0.85	160	● 4 x 5.8	0.85	160	5 x 5.8	0.36	240	5 x 5.8	0.36	240	5 x 5.8	0.36	240			
33	330				● 4 x 5.8	0.85	160				● 5 x 5.8	0.36	240	6.3 x 5.8	0.26	300	6.3 x 5.8	0.26	300			
47	470	● 4 x 5.8	0.85	160	6.3 x 5.8	0.26	300	● 5 x 5.8	0.36	240	6.3 x 5.8	0.26	300	6.3 x 5.8	0.26	300	6.3 x 5.8	0.26	300			
68	680							6.3 x 5.8	0.26	300	6.3 x 5.8	0.26	300	6.3 x 7.7	0.16	600	● 6.3 x 7.7	0.16	600			
100	101	● 5 x 5.8	0.36	240	6.3 x 5.8	0.26	300	6.3 x 5.8	0.26	300	6.3 x 7.7	0.16	600	● 6.3 x 7.7	0.16	600	● 8 x 6.2	0.18	500	8 x 10	0.08	850
150	151				6.3 x 5.8	0.26	300	6.3 x 7.7	0.16	600	8 x 10	0.08	850	● 10 x 7.7	0.10	850	● 10 x 7.7	0.10	850			
220	221	6.3 x 5.8	0.26	300	6.3 x 7.7	0.16	600	6.3 x 7.7	0.16	600	8 x 10	0.08	850	● 10 x 7.7	0.10	850	● 10 x 7.7	0.10	850	10 x 10	0.12	900
330	331	6.3 x 7.7	0.16	600	8 x 10	0.08	850	8 x 10	0.08	850	8 x 10	0.08	850	10 x 10	0.06	1190						
390	391																			10 x 10	0.08	850
470	471	8 x 10	0.08	850	8 x 10	0.08	850	8 x 10	0.08	850	10 x 10	0.06	1190	10 x 13.5	0.06	1190						
560	561																					
680	681				8 x 10	0.08	850	10 x 10	0.06	1190	10 x 13.5	0.06	1190									
820	821										10 x 10	0.08	850									
1000	102	8 x 10	0.08	850	10 x 10	0.06	1190	10 x 13.5	0.06	1190												
1200	122				10 x 10	0.08	850															
1500	152	10 x 10	0.06	1190	10 x 13.5	0.06	1190															
1800	182	10 x 10	0.08	850																		
2200	222	10 x 13.5	0.06	1190																		

Max. Impedance (Ω) at 20°C 100kHz, Rated ripple current (mAmps) at 105°C 100kHz

●: In this case, [6] will be put at 12th digit of type numbering system.

- Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.