



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ALUMINUM ELECTROLYTIC CAPACITORS

UCX

Chip Type, High Reliability
Low temperature ESR specification



- Chip type, high temperature range, for +135°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

UCX




Specifications


| Item | Performance Characteristics | | | | | | | |
|-------------------------------|---|-----------------|------|------|------|------|---------------------------------------|---|
| Category Temperature Range | -40 to +135°C | | | | | | | |
| Rated Voltage Range | 10 to 50V | | | | | | | |
| Rated Capacitance Range | 47 to 3300μF | | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | | |
| Leakage Current | After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3(μA), whichever is greater. | | | | | | | |
| Tangent of loss angle (tan δ) | Rated voltage (V) | 10 | 16 | 25 | 35 | 50 | Measurement frequency : 120Hz at 20°C | |
| | tan δ (MAX.) | 0.30 | 0.23 | 0.18 | 0.16 | 0.16 | | |
| Stability at Low Temperature | Rated voltage (V) | 10 | 16 | 25 | 35 | 50 | Measurement frequency : 120Hz | |
| | Impedance ratio ZT / Z20 (MAX.) | Z-40°C / Z+20°C | | 12 | 8 | 6 | | 4 |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 135°C. | | | | | | Capacitance Change | Within ± 30% of the initial capacitance value |
| | | | | | | | tan δ | 300% or less than the initial specified value |
| | | | | | | | Leakage current | Less than or equal to the initial specified value |
| Shelf Life | After storing the capacitors under no load at 135°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | | | | | | | |
| Resistance to soldering heat | The capacitors shall be kept on the hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. | | | | | | Capacitance Change | Within ±10% of the initial capacitance value |
| | | | | | | | tan δ | Less than or equal to the initial specified value |
| | | | | | | | Leakage current | Less than or equal to the initial specified value |
| Marking | Black print on the case top. | | | | | | | |

Radial Lead Type


(φ 6.3) [Vibration Resistance]

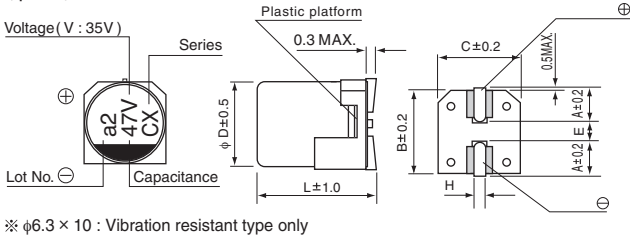


(φ 8, φ 10) [Standard]

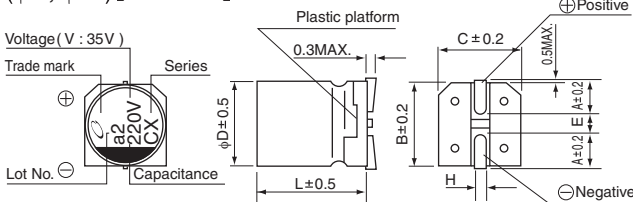


(φ 12.5 to φ 18) [Standard]

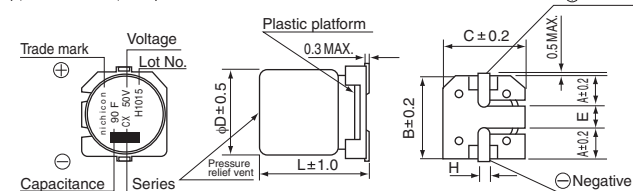


Type numbering system (Example : 35V 47μF)

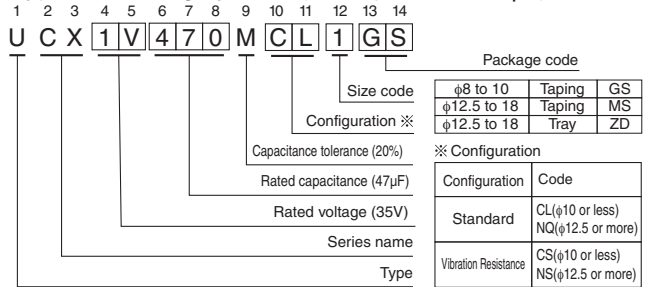

(φ 8, φ 10) [Vibration Resistance]

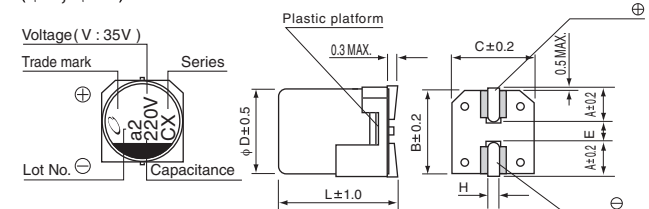

(φ 12.5 to φ 18) [Vibration Resistance]

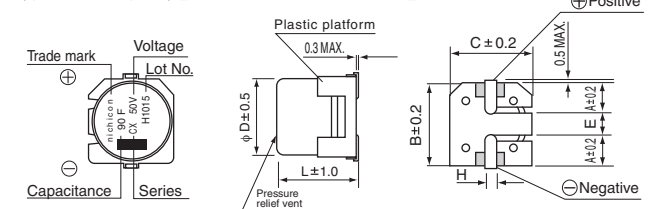

Standard

| | (mm) | | | | |
|------|------------|------------|------------|---------------|---------------|
| φDXL | 8×10 | 10×10 | 12.5×13.5 | 16×16.5, 21.5 | 18×16.5, 21.5 |
| A | 2.9 | 3.2 | 4.8 | 5.4 | 6.4 |
| B | 8.3 | 10.3 | 13.6 | 17.1 | 19.1 |
| C | 8.3 | 10.3 | 13.6 | 17.1 | 19.1 |
| E | 3.1 | 4.5 | 4 | 6.3 | 6.3 |
| L | 10 | 10 | 13.5 | 16.5, 21.5 | 16.5, 21.5 |
| H | 0.8 to 1.1 | 0.8 to 1.1 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 |

Vibration Resistance

| | (mm) | | | | | |
|------|------------|------------|------------|------------|---------------|---------------|
| φDXL | 6.3×10 | 8×10 | 10×10 | 12.5×13.5 | 16×16.5, 21.5 | 18×16.5, 21.5 |
| A | 2.4 | 2.9 | 3.2 | 4.8 | 5.4 | 6.4 |
| B | 6.6 | 8.3 | 10.3 | 13.6 | 17.1 | 19.1 |
| C | 6.6 | 8.3 | 10.3 | 13.6 | 17.1 | 19.1 |
| E | 2.2 | 3.1 | 4.5 | 4 | 6.3 | 6.3 |
| L | 10 | 10 | 10 | 13.5 | 16.5, 21.5 | 16.5, 21.5 |
| H | 0.5 to 0.8 | 1.1 to 1.5 | 1.1 to 1.5 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 |

□ Aid electrode

Rated Voltage

| | | | | | |
|------|----|----|----|----|----|
| V | 10 | 16 | 25 | 35 | 50 |
| Code | A | C | E | V | H |

● Dimension table in next page.



■ Dimensions

| Cap.(μF) | V Code | 10 | | | | 16 | | | | 25 | | | | 35 | | | | 50 | | | |
|----------|-----------|---|--|--|--|--|--|--|--|---------------------------------------|--|--|--|--|--------------------------------------|--|--|----|--|--|--|
| | | 1A | | | | 1C | | | | 1E | | | | 1V | | | | 1H | | | |
| 47 | 470 | | | | | | | | | | | | | 6.3 X 10 0.25 4 15 197 8 X 10 0.20 3 12 270 | 8 X 10 0.25 3.5 15 270 | | | | | | |
| 68 | 680 | | | | | | | | | | | | | 8 X 10 0.20 3 12 270 | | | | | | | |
| 100 | 101 | | | | | 6.3 X 10 0.25 4 15 197 8 X 10 0.20 3 12 270 | | | | 8 X 10 0.20 3 12 270 | | | | 6.3 X 10 0.25 4 15 197 8 X 10 0.20 3 12 270 | 10 X 10 0.2 2.5 12 500 | | | | | | |
| 220 | 221 | 8 X 10 0.20 3 12 270 | | | | 8 X 10 0.20 3 12 270 | | | | 10 X 10 0.15 2 10 500 | | | | 10 X 10 0.15 2 10 500 | | | | | | | |
| 330 | 331 | 8 X 10 0.20 3 12 270 10 X 10 0.15 2 10 500 | | | | 10 X 10 0.15 2 10 500 | | | | 10 X 10 0.15 2 10 500 | | | | | | | | | | | |
| 390 | 391 | | | | | | | | | | | | | | 12.5 X 13.5 0.09 1.3 6.5 750 | | | | | | |
| 470 | 471 | 10 X 10 0.15 2 10 500 | | | | 10 X 10 0.15 2 10 500 | | | | | | | | 12.5 X 13.5 0.07 1.0 5.0 750 | 16 X 16.5 0.07 0.70 3.5 1000 | | | | | | |
| 560 | 561 | | | | | | | | | | | | | 12.5 X 13.5 0.07 1.0 5.0 750 | 16 X 16.5 0.07 0.70 3.5 1000 | | | | | | |
| 680 | 681 | | | | | | | | | | | | | 12.5 X 13.5 0.07 1.0 5.0 750 | 18 X 16.5 0.07 0.70 3.5 1200 | | | | | | |
| 820 | 821 | | | | | | | | | 12.5 X 13.5 0.07 1.0 5.0 750 | | | 16 X 16.5 0.05 0.50 2.5 1200 | 18 X 16.5 0.07 0.70 3.5 1200 | | | | | | | |
| 1000 | 102 | | | | | | | | | 12.5 X 13.5 0.07 1.0 5.0 750 | | | 16 X 16.5 0.05 0.50 2.5 1200 | 16 X 21.5 0.05 0.40 2.0 1600 | | | | | | | |
| 1200 | 122 | | | | | | | | | 16 X 16.5 0.05 0.50 2.5 1200 | | | 18 X 16.5 0.05 0.50 2.5 1400 | 18 X 21.5 0.04 0.32 1.6 1900 | | | | | | | |
| 1500 | 152 | | | | | | | | | 16 X 16.5 0.05 0.50 2.5 1200 | | | 16 X 21.5 0.04 0.32 1.6 1900 18 X 16.5 0.05 0.50 2.5 1400 | | | | | | | | |
| 1800 | 182 | | | | | | | | | 16 X 16.5 0.05 0.50 2.5 1200 | | | 18 X 21.5 0.035 0.28 1.4 2200 | | | | | | | | |
| 2200 | 222 | | | | | | | | | 18 X 16.5 0.05 0.50 2.5 1400 | | | 18 X 21.5 0.035 0.28 1.4 2200 | | | | | | | | |
| 2700 | 272 | | | | | | | | | 16 X 21.5 0.04 0.32 1.6 1900 | | | | Case size φDXL (mm) Initial 20°C Initial -40°C Alter endurance test 1000hours -40°C Rated ripple ESR | | | | | | | |
| 3300 | 332 | | | | | | | | | 18 X 21.5 0.035 0.28 1.4 2200 | | | | | | | | | | | |

MAX. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple current(mArms) at 135°C 100kHz

● In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

| Frequency | 50Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
|-------------|------|-------|-------|------|---------------|
| Coefficient | 0.35 | 0.50 | 0.64 | 0.83 | 1.00 |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.