



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RECTIFIERS

High Efficiency, 50A and 70A

UES801 BYW78-50
UES802 BYW78-100
UES803 BYW78-150

FEATURES

- High Continuous Current Rating
- Very Low Forward Voltage
- Very Fast Switching Speeds
- High Surge Capability
- Low Thermal Resistance
- Mechanically Rugged DO-5 Package

DESCRIPTION

This Series is specifically designed for operation in power switching circuits operating at frequencies of at least 20KHz. The very low forward voltage and very fast recovery time make them particularly suited for switching type power supplies.

ABSOLUTE MAXIMUM RATINGS

	UES801	UES802	UES803	BYW78-50	BYW78-100	BYW78-150
Peak Inverse Voltage, V_R	50V	100V	150V	50V	100V	150V
Repetitive Peak Inverse Voltage, V_{RRM}	50V	100V	150V	50V	100V	150V
Non-Repetitive Peak Inverse Voltage, V_{RSM}	50V	100V	150V	50V	100V	150V
Maximum Average D.C. Output Current, I_o @ $T_c = 100^\circ\text{C}$	70A	70A	70A	50A	50A	50A
Non-Repetitive Sinusoidal Surge Current (8.3ms), I_{FSM}	800A	800A	800A	1500A	1500A	1500A
Thermal Resistance, Junction to Case, $R_{\theta JC}$	0.8°C/W					
Storage Temperature Range, T_{STG}	-55°C to +175°C					
Maximum Operating Junction Temperature, $T_{J MAX}$	+175°C					


ELECTRICAL SPECIFICATIONS

Type	Maximum Reverse Voltage V_R	Maximum Forward Voltage V_F		Maximum Reverse Current I_R		Maximum Reverse Recovery Time t_{RR}
		$T_c = 25^\circ\text{C}$	$T_c = 150^\circ\text{C}$	$T_c = 25^\circ\text{C}$	$T_c = 150^\circ\text{C}$	
UES801 UES802 UES803	50V 100V 150V	0.9/5V @ $I_F = 70\text{A}$	0.84V @ $I_F = 70\text{A}$	25μA @ Rated V_R	30mA @ Rated V_R	50ns ⁽¹⁾
		$T_c = 25^\circ\text{C}$	$T_c = 100^\circ\text{C}$	$T_c = 25^\circ\text{C}$	$T_c = 100^\circ\text{C}$	
BYW78-50 BYW78-100 BYW78-150	50V 100V 150V	1.1V @ $I_F = 160\text{A}$	0.85V @ $I_F = 50\text{A}$	50μA @ Rated V_R	5mA @ Rated V_R	60ns ⁽²⁾

(1) Measured in circuit $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{RJC} = 0.25\text{A}$


(2) Measured in circuit $I_F = 1\text{A}$, $V_R = 30\text{V}$, $dI_F/dt = 50\text{A}/\mu\text{s}$

MECHANICAL SPECIFICATIONS

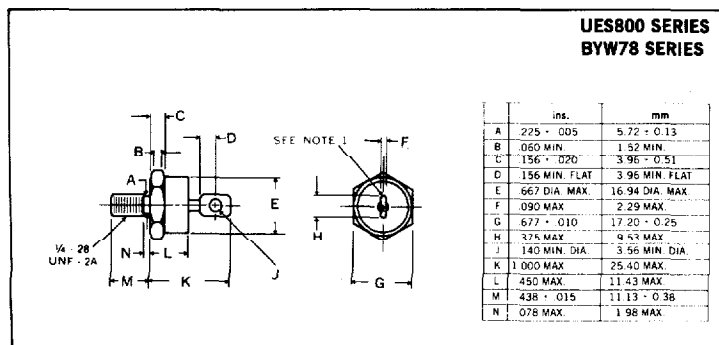


Notes:

1. Standard polarity is cathode-to-stud
2. All metal surfaces tin plated.
3. Maximum unlubricated stud torque: 20 inch pounds (20 kg. cm).
4. Angular orientation of terminal is undefined.




Microsemi Corp.
Watertown
The diode experts


Output Current vs.
Case Temperature




Forward Current
vs. Forward Voltage

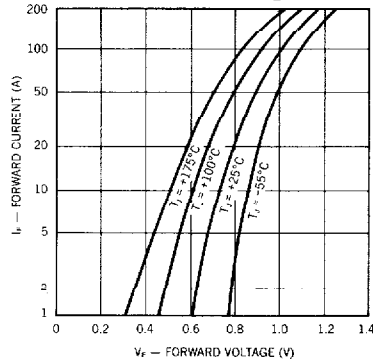


Peak Output Current vs.
Case Temperature

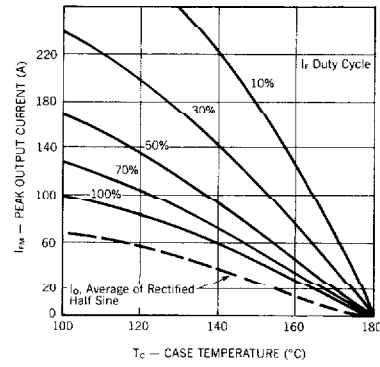


Maximum Forward Surge
vs. Number of Cycles

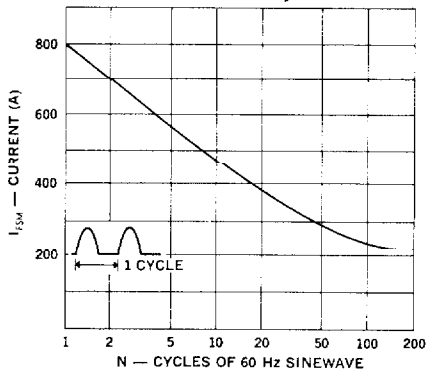


Typical Reverse Current
vs. Reverse Voltage

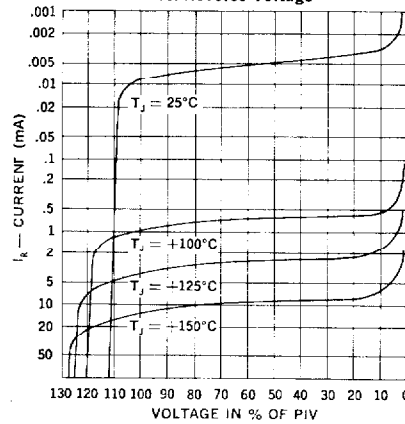

Thermal Impedance
vs. Pulse Width

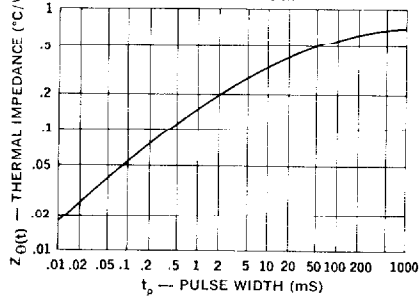

Reverse-Recovery Circuit

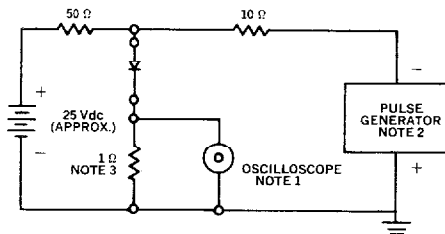

NOTES:

1. Oscilloscope: Rise time ≤ 3 ns; input impedance $\approx 50\Omega$.
2. Pulse Generator: Rise time ≤ 8 ns; source impedance 10Ω .
3. Current viewing resistor, non-inductive, coaxial recommended.