



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UL924 Enclosed 20 AMP Bypass Shunt Relay



UL924SR



PROJECT INFORMATION

Project Name _____

Catalog No. _____

Date _____

Our enclosed 20 Amp electrically held UL 924 Bypass Shunt Relays provide an isolated normally closed contact that can be used to bypass control devices to power emergency lighting directly from the emergency generator. The coil in these relays is powered by a normal power supply.

When the loss of commercial power occurs, the contact returns to its normally closed state and bypasses control to the emergency egress lighting. These fixtures will remain connected directly to generator emergency source until transfer back to normal power occurs.

Product Features

- 20 Amp 120/277VAC Relay
- N/C isolated contacts
- UL listed
- No minimum load requirement
- Five-year limited warranty
- 120-277 Vac


Dimensional Data



Ordering Information

MODEL	
UL924SR1	UL924 N/C Shunt Relay 120/277V, 20A SPST with 120VAC Coil
UL924SR2	UL924 N/C Shunt Relay 120/277V, 20A SPST with 277VAC Coil

Wiring Diagrams

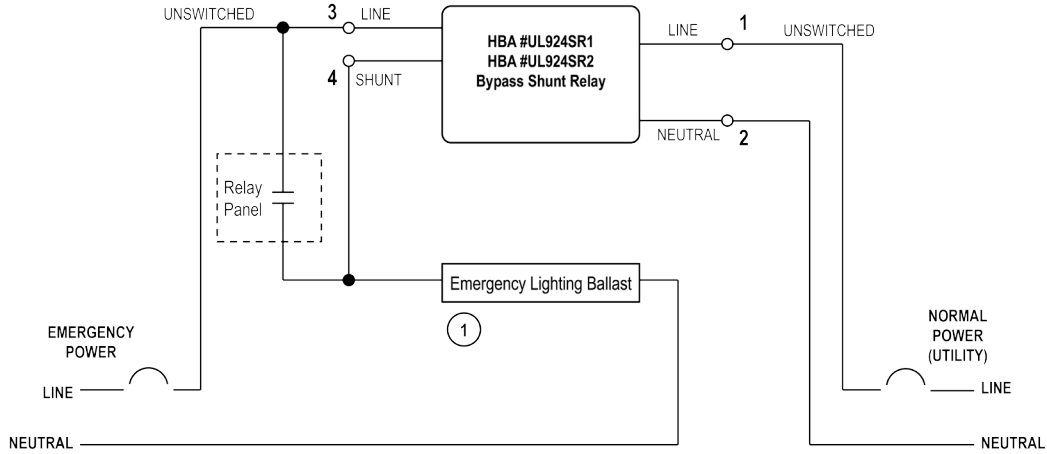

① Switched by Panel when Normal Power is available. Held ON when Normal Power is not available and Emergency Power is available

General Specifications

# Relays & Contact Type	One (1) SPST Continuous Duty Electrically Held Coil
Contact Ratings	1500 VA Tungsten @ 120VAC 20 Amp Ballast @ 120/277VAC 2 HP @ 277VAC 1 HP @ 120VAC
Coil Current	0.06 A @ 120VAC 0.06 A @ 277VAC
Coil Voltage Input	UL924SR1: 120VAC; 60Hz UL924SR2: 277VAC; 60Hz
Operating environment	Indoor use only 32° to 140°F (0° to 60°C) Relative humidity (non-condensing): 0% to 95%
Dimensions	3.75" L x 1.75" W x 1.25" D (95.3mm L x 44.5mm W x 31.8mm D) with mounting ears for 1-gang box
Housing Rating	Plenum, NEMA 1
Flame Rating	UL94V-0
Wires	7", 105° C, 600V Rated
Certifications	UL Listed, UL924
Warranty	Five-year limited