

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









APPLICATIONS / MARKETS















RoHS

SPECIFICATIONS

Electrical Rating: 3A, 250VAC

Mechanical Life: 1,000,000 cycles (momentary); 500,000

cycles (latching)

Electrical Life: 50,000 Cycles **Contact Resistance:** $50m\Omega$

Insulation Resistance: 1000 MΩ @ 500VDC

Dielectric Strength: 2,000VAC

Operating/Storage Temperature: -20°C to 55°C

Travel: 3.2mm

Moisture Protection: IP67

Contact Arrangement: SPDT or DPDT

Actuation Force: Single Pole: 2.5N; Double Pole: 3.5N

Panel Thickness: 1-10mm Hex Nut Torque: 5-14Nm


Mechanical Impact Protection: IK10

Agency Approvals: cURus

FEATURES & BENEFITS

- 25mm diameter panel cutout
- Ring illumination
- Multiple switch functions available
- · Multiple illumination voltage options
- IP67 rated
- SPDT or DPDT
- UL Certified

PART NUMBER CONFIGURATOR

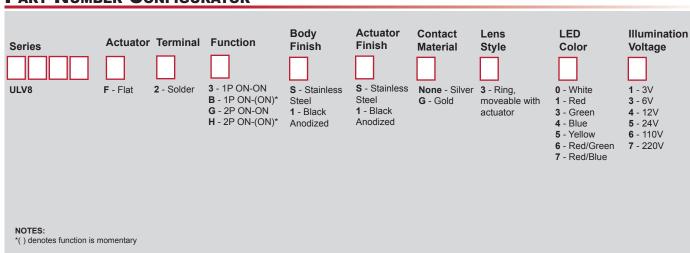

Specifications subject to change without notice

BODY DIMENSIONS

ANTI-VANDAL

SWITCHES

DETECTOR

SWITCHES

DIP

SWITCHES

KEYLOCK

SWITCHES

NAVIGATION

SWITCHES

PUSHBUTTON

SWITCHES

ROCKER

SWITCHES

ROTARY

SWITCHES

DPDT SWITCH DIMENSIONS

_ [1.102 in] -

2.00 [.079 in]

27.40 [1.079 in]

35.20 34.60 [1.386 ibj.362 in]

0

10.00 [.394 in]


5.50 [.217 in] 13.00 [.512 in]


.50 [.020 in]


5.00 [.197 in]


SLIDE

SWITCHES

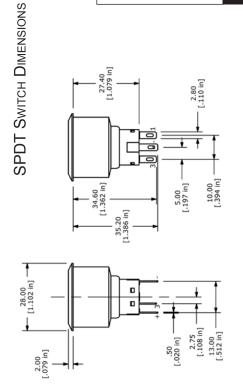







SNAP ACTION


SWITCHES

TACTILE

SWITCHES

TOGGLE

SWITCHES




800.867.2717

www.e-switch.com

DETECTOR SWITCHES ANTI-VANDAL SWITCHES

ACTUATOR OPTIONS



DIP

SWITCHES

Ring Illuminated SPDT & DPDT

NAVIGATION

SWITCHES


KEYLOCK SWITCHES

PANEL CUTOUT

ROCKER

SWITCHES

PUSHBUTTON SWITCHES



SLIDE

SWITCHES

ROTARY

SWITCHES

Panel Cutout SPDT & DPDT

SNAP ACTION

SWITCHES

TOGGLE

SWITCHES

TACTILE

SWITCHES

CAP

OPTIONS