



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

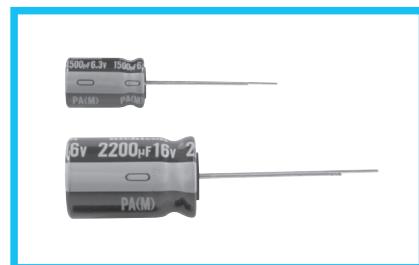
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

UPA

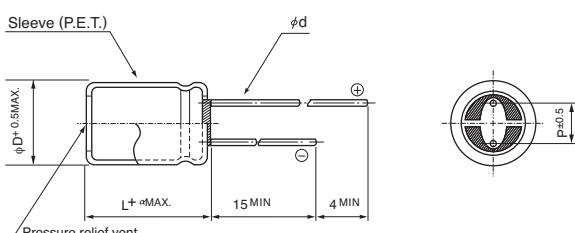
Miniature Sized, Low Impedance,
High Reliability For
Switching Power Supplies



- Lower impedance than UPW.
- Smaller case size and high ripple current.
- Compliant to the RoHS directive (2011/65/EU).

**■ Specifications**

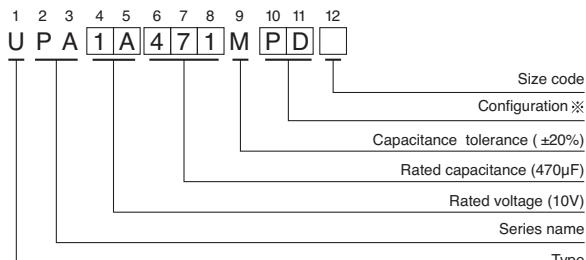
Item	Performance Characteristics									
Category Temperature Range	-55 to +105°C									
Rated Voltage Range	6.3 to 35V									
Rated Capacitance Range	180 to 10000μF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.									
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35	120Hz 20°C			
	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12				
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.										
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	120Hz			
	Impedance ratio ZT / Z20 (MAX.) [Z-55°C / Z+20°C]	3	3	3	3	3				
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 5000 hours (3000 hours for φD=8, 4000 hours for φD=10) at 105°C, the peak voltage shall not exceed the rated voltage.									
	Capacitance change		Within ±20% of the initial capacitance value (6.3V, 10V : ±30%)							
	tan δ		200% or less than the initial specified value (6.3V, 10V : 300%)							
Shelf Life	Leakage current						Less than or equal to the initial specified value			
	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.									
	Marking									
Printed with white color letter on dark brown sleeve.										

■ Radial Lead Type

α	(L < 20) 1.5
	(L ≥ 20) 2.0

	φD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5	
φd	0.6	0.6	*0.6	0.8	0.8	

※ : In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

Type numbering system (Example : 10V 470μF)**※ Configuration**

φD	Pb-free leadwire Pb-free PET sleeve
8·10	PD
12.5 to 18	HD

● Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
180 to 330	0.55	0.65	0.75	0.85	1.00	
390 to 1000	0.70	0.75	0.80	0.90	1.00	
1200 to 10000	0.80	0.85	0.90	0.95	1.00	

• Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

