



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






μPD720115 is a USB 2.0 hub controller which supports USB Battery Charging specification 1.2 and it can charge various portable devices, like smart phone and Tablet PCs. μPD720115 integrates two regulators to eliminate external regulators and this saves system costs. μPD720115 enhances operating temperature range from -40 to +85 degree and it is suitable for various markets, including consumer and industrial market.

Specifications

- ▶ Compliant with Universal Serial Bus Specification Revision 2.0, which is released by USB Implementers Forum, inc
 - Low-speed (1.5Mbps) / Full-speed (12Mbps) / High-speed (480Mbps)
 - Supporting USB2.0 Link Power Management
 - USB-IF Certified : TID(Test ID) = 30000066
- ▶ Got Windows Hardware Certification for Windows 8 and Windows 8.1 (Submission ID =1617556)
- ▶ Supports USB battery Charging Specification Revision 1.2 and other portable devices
- ▶ Configurable downstream port counts of 2,3, or 4 ports
- ▶ Supports Individual/Gang power control/over-current detection
- ▶ Supports USB 2.0 Compound (non-removal) devices by I/O pin strapping
- ▶ Single 5V power supply, on-chip LDO for 3.3 V from 5 V and 1.05 V from 3.3 V
- ▶ System clock: 24 MHz Crystal or Oscillator
- ▶ Supports 24MHz clock output from non-removal device on downstream port
- ▶ Small foot print using small QFN package (40pin QFN)

Internal Block Diagram

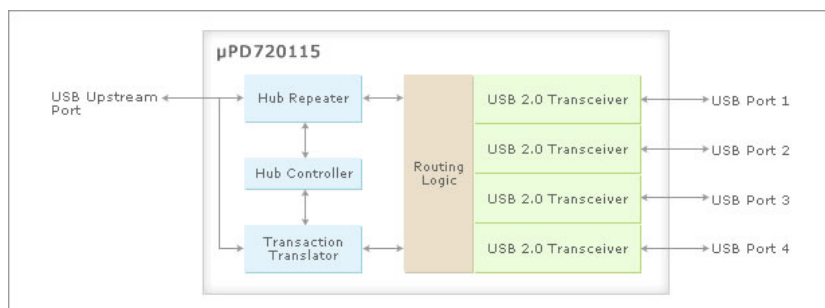

Application

- ▶ USB hub box
- ▶ Monitor
- ▶ PC, Docking station, Port replicator
- ▶ Digital TV, Set-Top-Box
- ▶ Multi function printer
- ▶ Other Industrial equipment

Order Information

| Order Name | Package | Ta |
|-----------------------|--------------------------------------|----------|
| UPD720115K8-611-BAK-A | 40-pin QFN (6mm X 6mm) Lead(Pb) Free | 0~85°C |
| UPD720115K8-711-BAK-A | 40-pin QFN (6mm X 6mm) Lead(Pb) Free | -40~85°C |