



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





NEC's L-BAND SP3T SWITCH UPG2031TQ

FEATURES

- **LOW INSERTION LOSS:**
LINS = 0.45 dB TYP. @ $V_{cont} = 2.8\text{ V/0 V}$, $f = 1.0\text{ GHz}$
LINS = 0.55 dB TYP. @ $V_{cont} = 2.8\text{ V/0 V}$, $f = 2.0\text{ GHz}$
- **HIGH ISOLATION:**
ISL = 21 dB TYP. @ $V_{cont} = 2.8\text{ V/0 V}$, $f = 2.0\text{ GHz}$
- **HIGH POWER:**
 $P_{in} (0.1\text{ dB}) = 33.0\text{ dBm TYP. @ } V_{cont} = 2.8\text{ V/0 V}$, $f = 1.0\text{ GHz}$
- **HIGH-DENSITY SURFACE MOUNTING:**
10-pin plastic TSON package ($2.30 \times 2.55 \times 0.60\text{ mm}$)

DESCRIPTION

NEC's UPG2031TQ is an L-band SP3T GaAs FET switch for CDMA/PCS/GPS triple mode digital cellular telephone applications. The device can operate from 500 MHz to above 2.0 GHz, with low insertion loss and high linearity.

APPLICATIONS

- CDMA/PCS/GPS triple mode digital cellular telephones



ORDERING INFORMATION

| Part Number | Package | Marking | Supplying Form |
|----------------|---------------------|---------|--|
| UPG2031TQ-E1-A | 10-pin plastic TSON | 2031 | <ul style="list-style-type: none">• Embossed tape 8 mm wide• Pin 5, 6 face the perforation side of the tape• Qty 3 kpcs/reel |

Remark To order evaluation samples, contact your nearby sales office.
Part number for sample order: UPG2031TQ

Caution Observe precautions when handling, because these devices are sensitive to electrostatic discharge.

PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

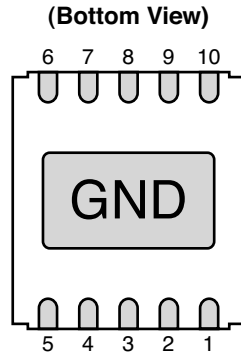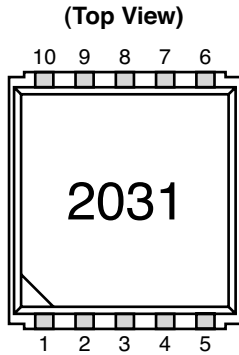

| Pin No. | Pin Name |
|---------|--------------------|
| 1 | RF1 |
| 2 | GND |
| 3 | RF2 |
| 4 | V _{cont2} |
| 5 | RF3 |
| 6 | V _{cont3} |
| 7 | GND |
| 8 | ANT |
| 9 | GND |
| 10 | V _{cont1} |

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise specified)

| Parameter | Symbol | Ratings | Unit |
|-------------------------------|-------------------|--------------|------|
| Switch Control Voltage | V _{cont} | -6.0 to +6.0 | V |
| Input Power | P _{in} | +36 | dBm |
| Operating Ambient Temperature | T _A | -45 to +85 | °C |
| Storage Temperature | T _{stg} | -55 to +150 | °C |

RECOMMENDED OPERATING RANGE (T_A = 25°C, unless otherwise specified)

| Parameter | Symbol | MIN. | TYP. | MAX. | Unit |
|-------------------------------|-----------------------|------|------|------|------|
| Switch Control Voltage (High) | V _{cont (H)} | 2.7 | 2.8 | 3.0 | V |
| Switch Control Voltage (Low) | V _{cont (L)} | -0.2 | 0 | 0.2 | V |


UPG2031TQ

ELECTRICAL CHARACTERISTICS

(T_A = +25°C, V_{cont} = 2.8 V/0 V, Z_O = 50 Ω, off chip DC blocking capacitors value: 56 pF, unless otherwise specified)

| Parameter | Symbol | ON-Pass | Test Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|--------------------------|-------------|--|------|------|------|------|
| Insertion Loss | L _{INS} | ANT-RF1/2/3 | f = 0.5 to 1.0 GHz | - | 0.45 | 0.65 | dB |
| | | | f = 1.0 to 2.0 GHz | - | 0.55 | 0.80 | dB |
| Isolation | ISL | ANT-RF1/2/3 | f = 0.5 to 1.0 GHz | 22 | 26 | - | dB |
| | | (OFF) | f = 1.0 to 2.0 GHz | 17 | 21 | - | dB |
| Input Return Loss | RL _{in} | ANT-RF1/2/3 | f = 0.5 to 2.0 GHz | 15 | 20 | - | dB |
| Output Return Loss | RL _{out} | ANT-RF1/2/3 | f = 0.5 to 2.0 GHz | 15 | 20 | - | dB |
| 0.1 dB Gain Compression Input Power | P _{in (0.1 dB)} | ANT-RF1/2/3 | f = 1.0 GHz | 31.0 | 33.0 | - | dBm |
| 2nd Harmonics | 2f ₀ | ANT-RF1/2/3 | f = 1.0 GHz, P _{in} = 27 dBm | 65 | 75 | - | dBc |
| 3rd Harmonics | 3f ₀ | ANT-RF1/2/3 | f = 1.0 GHz, P _{in} = 27 dBm | 65 | 75 | - | dBc |
| Switch Control Speed | t _{sw} | | | - | 150 | - | ns |
| Switch Control Current | I _{cont} | | RF Non | - | 1 | 50 | μA |

EVALUATION CIRCUIT

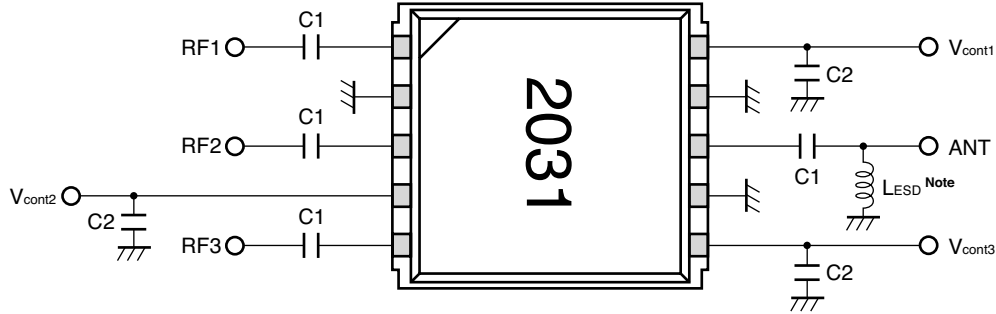


Note Recommend attached L_{ESD} to antenna port for ESD protection.

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

USING THE NEC EVALUATION BOARD

| Symbol | Values |
|--------|----------|
| C1 | 56 pF |
| C2 | 1 000 pF |


TRUTH TABLE

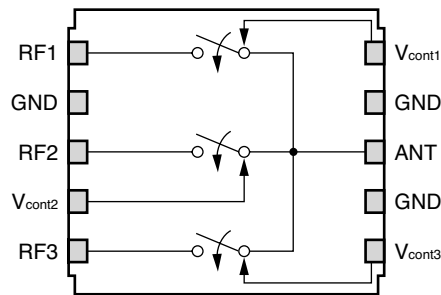

| V_{cont1} | V_{cont2} | V_{cont3} | ANT-RF1 | ANT-RF2 | ANT-RF3 |
|-------------|-------------|-------------|---------|---------|---------|
| High | Low | Low | ON | OFF | OFF |
| Low | High | Low | OFF | ON | OFF |
| Low | Low | High | OFF | OFF | ON |

PACKAGE DIMENSIONS

10-PIN PLASTIC TSON (UNIT: mm)

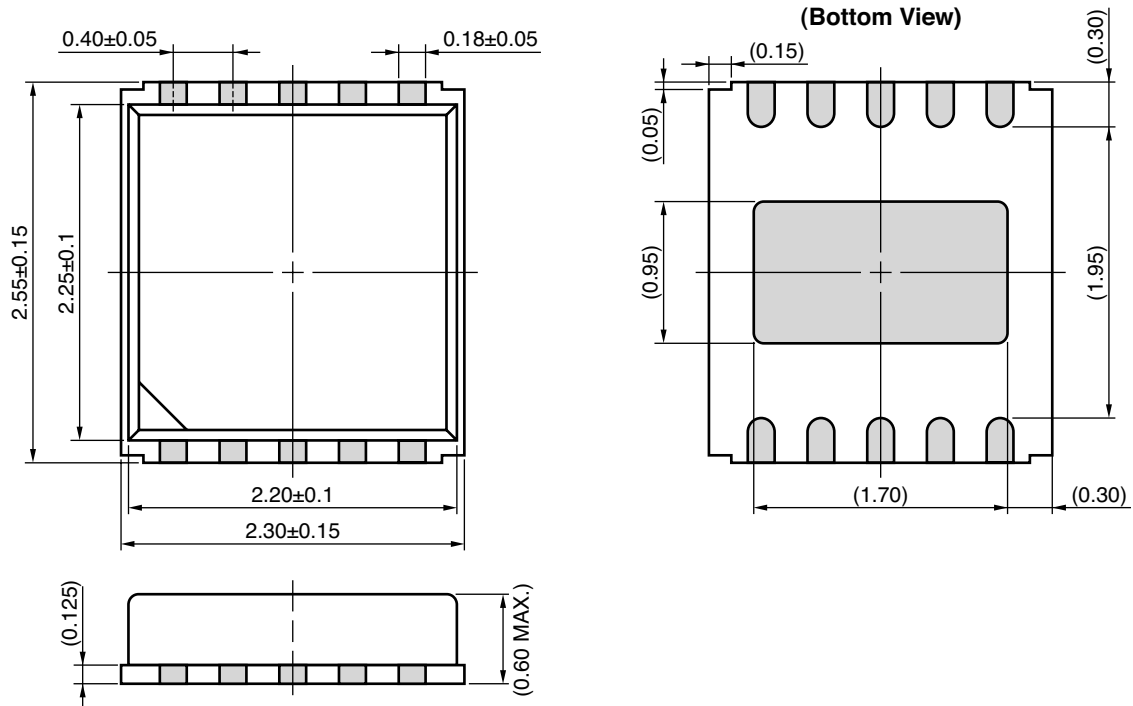

Remark (): Reference value

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

| Soldering Method | Soldering Conditions | Condition Symbol |
|------------------|---|------------------|
| Infrared Reflow | Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | IR260 |
| VPS | Peak temperature (package surface temperature) : 215°C or below Time at temperature of 200°C or higher : 25 to 40 seconds Preheating time at 120 to 150°C : 30 to 60 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | VP215 |
| Wave Soldering | Peak temperature (molten solder temperature) : 260°C or below Time at peak temperature : 10 seconds or less Preheating temperature (package surface temperature) : 120°C or below Maximum number of flow processes : 1 time Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | WS260 |
| Partial Heating | Peak temperature (pin temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | HS350 |

Caution Do not use different soldering methods together (except for partial heating).

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

CEL California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com

DATA SUBJECT TO CHANGE WITHOUT NOTICE

03/08/2004

NEC

A Business Partner of NEC Compound Semiconductor Devices, Ltd.

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

| Restricted Substance per RoHS | Concentration Limit per RoHS (values are not yet fixed) | Concentration contained in CEL devices | |
|-------------------------------|---|--|-----|
| | | -A | -AZ |
| Lead (Pb) | < 1000 PPM | Not Detected | (*) |
| Mercury | < 1000 PPM | Not Detected | |
| Cadmium | < 100 PPM | Not Detected | |
| Hexavalent Chromium | < 1000 PPM | Not Detected | |
| PBB | < 1000 PPM | Not Detected | |
| PBDE | < 1000 PPM | Not Detected | |

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.