



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



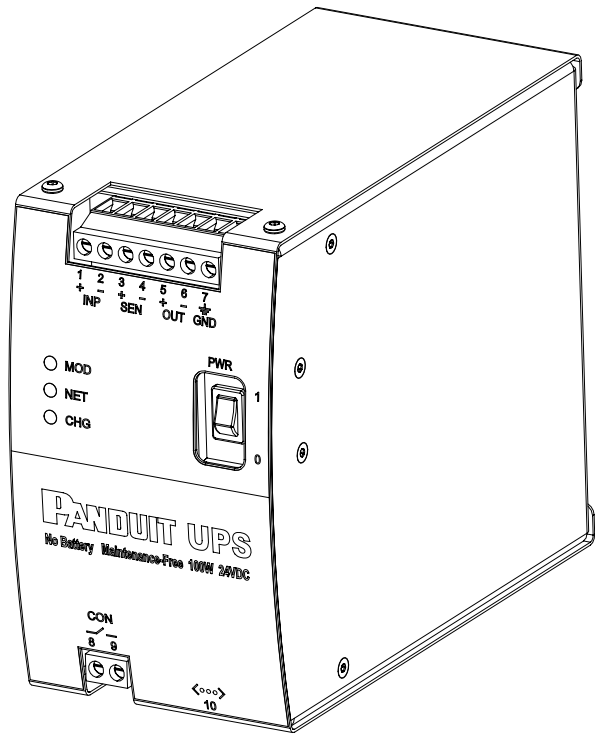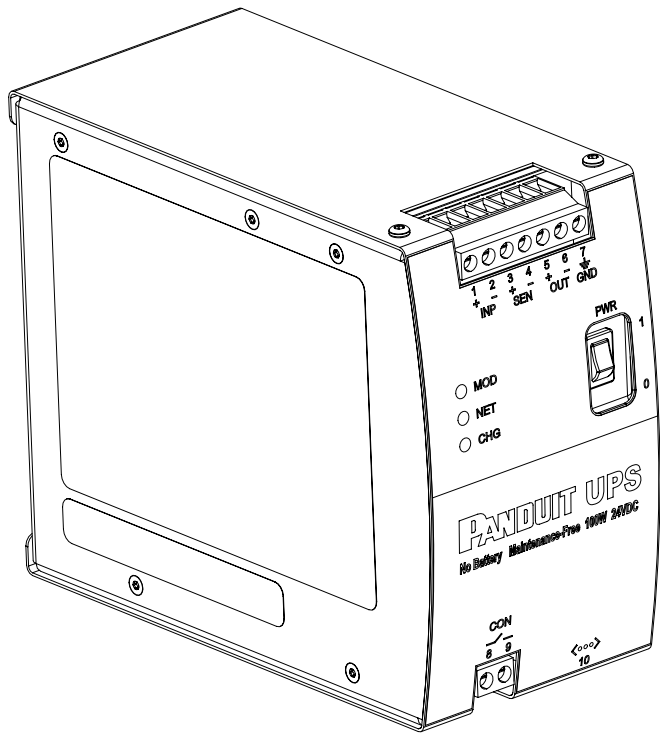

NOTES: UNLESS OTHERWISE SPECIFIED:

PANDUIT PART NO.: UPS00100DC
100W Uninterruptible Power Supply




ACCESSORIES
Load Sense Module Panduit part number UPS003LSM

UPS GENERAL SPECIFICATIONS



Input Power
Voltage: 24.0 to 28.0 VDC
Power: Fast Charge: 50 W Max.
Medium Charge: 35 W Max.
Slow Charge: 24 W Max.
Current: 6.5 A Max.
Protection: Over-voltage shut down at 32 VDC.
Maximum over-voltage is: +50 VDC at 25°C ambient
Reverse voltage maximum is: -50 VDC at 25°C ambient
Output Power
Voltage: Input present: 500 mV drop at 100 W load
Input not present: 21.0 to 23.0 VDC
Current: 4.55 A @ 22 VDC
Short circuit rating: 6.1 A to 7.7 A
Environmental
Operating Temperature: -40°C to +60°C.
Storage (non-operational) Temperature: -40°C to +70°C.
Humidity: 0 to 95% RH, noncondensing
Operational Vibration: 2G at 10 to 500 Hz
Operational Shock: 20G (11ms 3 bumps / direction, 18 bumps in total)

Weight: 2177 gr. / 4.8 lbs.

Numbers shown in parentheses [] are inches.

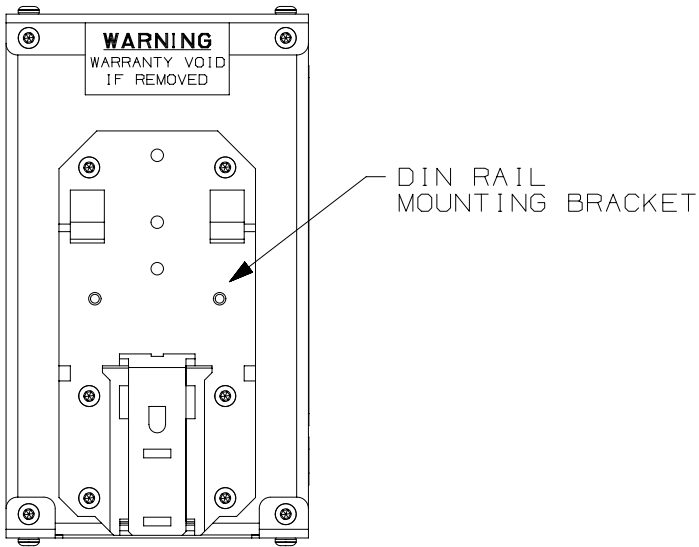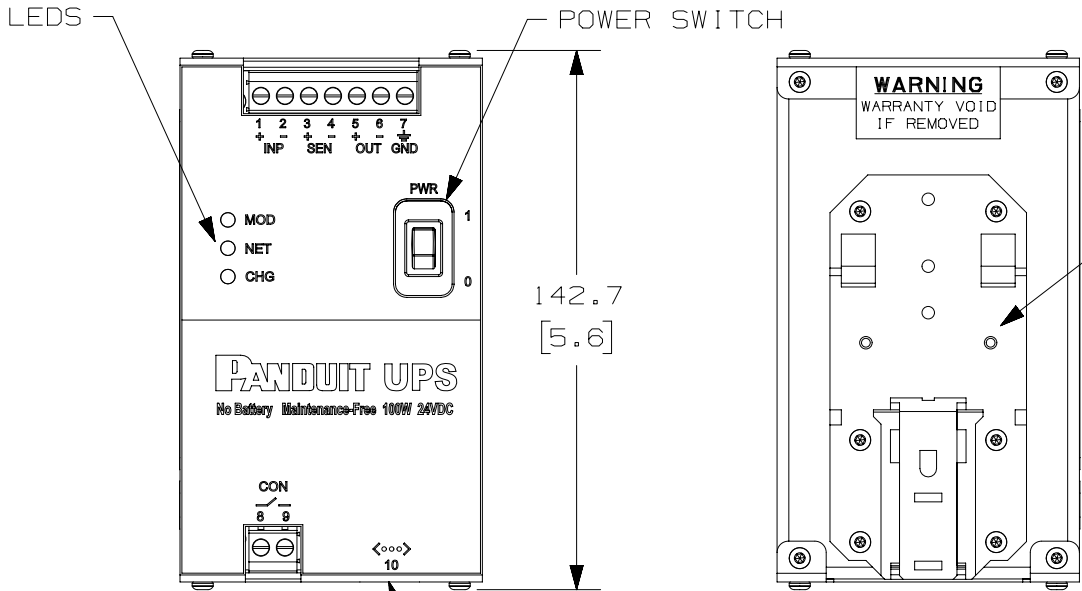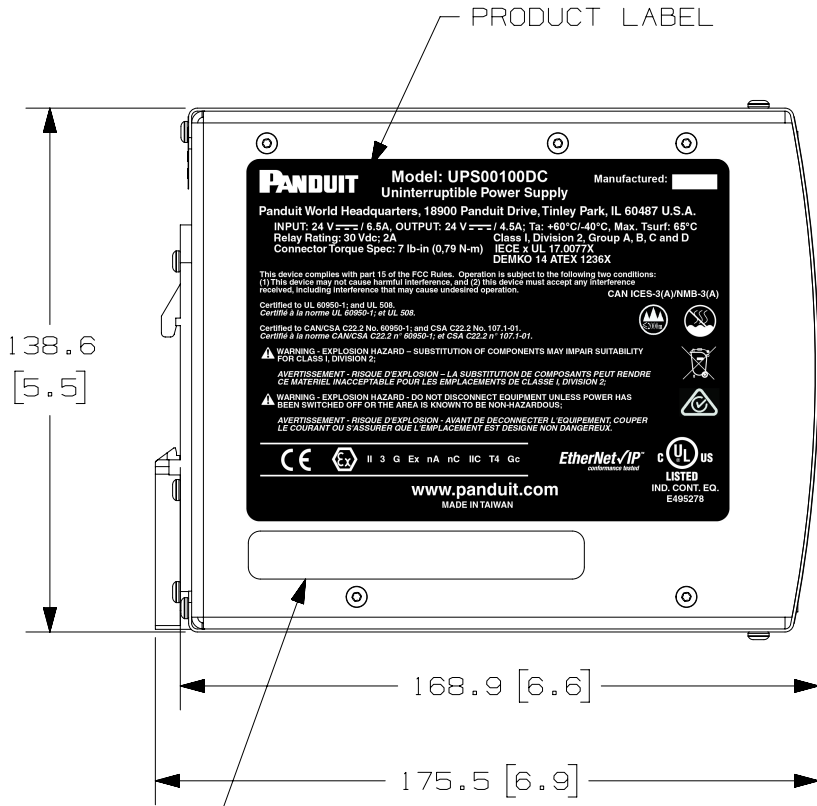

02B	1/9/18	JBO	DAJP	TIMH	RELEASED TO CUSTOMER	00074LAA_DC	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

TITLE				UPS00100DC 100W UNINTERRUPTIBLE POWER SUPPLY			
CUSTOMER DRAWING							
ITEM REVISION NAME							
00074LAA/02							
DATASET FILE NAME				<div>MATERIAL:</div> <div>N/A</div> <div>DRAWING NUMBER:</div> <div>00074LAA_DC</div>			
00074LAA_DC_02B							
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]							
<div><div>.X ± -</div><div>.XX ± -</div><div></div></div> <div><div>.XXX ± -</div><div>ANGLES ± -</div><div>THIRD ANGLE PROJECTION</div></div>							
DRAWN BY		DATE		CHK		SCALE	
JBO		6/21/17		DAJP		NONE	
SHT 1 OF 1						SIZE	
						B	