



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

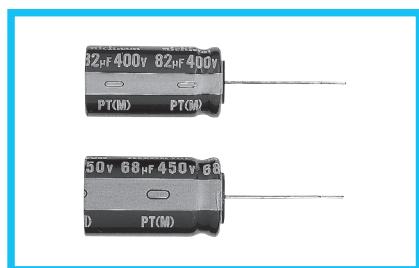

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

**UPT**

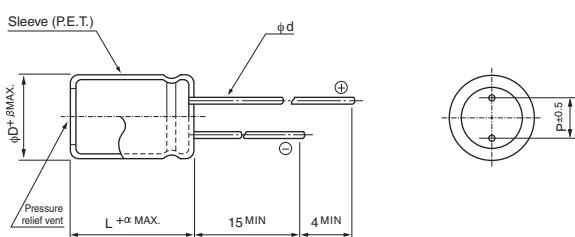
Miniature Sized, High Ripple Current, Long Life



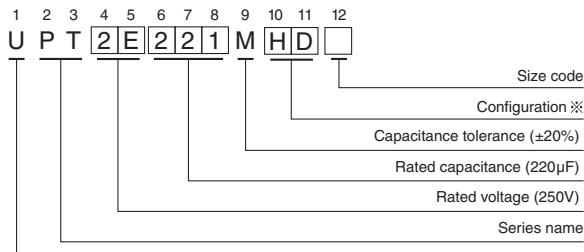
- High ripple current.
- Suited for ballast application.
- Compliant to the RoHS directive (2011/65/EU).

**■ Specifications**

Item	Performance Characteristics																															
Category Temperature Range	-25 to +105°C																															
Rated Voltage Range	200 to 450V																															
Rated Capacitance Range	15 to 820μF																															
Capacitance Tolerance	±20% at 120Hz, 20°C																															
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.06CV+10 (μA)																															
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C <table border="1"> <tr> <th>Rated voltage (V)</th> <td>200</td> <td>220</td> <td>250</td> <td>400</td> <td>420</td> <td>450</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>tan δ (MAX.)</th> <td>0.12</td> <td>0.12</td> <td>0.12</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>										Rated voltage (V)	200	220	250	400	420	450					tan δ (MAX.)	0.12	0.12	0.12	0.15	0.20	0.20				
Rated voltage (V)	200	220	250	400	420	450																										
tan δ (MAX.)	0.12	0.12	0.12	0.15	0.20	0.20																										
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <tr> <th>Rated voltage (V)</th> <td>200</td> <td>220</td> <td>250</td> <td>400</td> <td>420</td> <td>450</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>Impedance ratio ZT / Z20 (MAX.)</th> <td>Z-25°C / Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>8</td> <td>8</td> <td>8</td> <td></td> <td></td> <td></td> </tr> </table>										Rated voltage (V)	200	220	250	400	420	450					Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	3	3	3	8	8	8			
Rated voltage (V)	200	220	250	400	420	450																										
Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	3	3	3	8	8	8																									
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 5000 hours at 105°C, the peak voltage shall not exceed the rated voltage. <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>										Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																
Capacitance change	Within ±20% of the initial capacitance value																															
tan δ	200% or less than the initial specified value																															
Leakage current	Less than or equal to the initial specified value																															
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																															
Marking	Printed with white color letter on dark brown sleeve.																															

**■ Radial Lead Type**

Type numbering system (Example : 250V 220μF)



## ※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 to 18	HD
20 to 25	RD

(mm)						
φD	10	12.5	16	18	20	22
P	5.0	5.0	7.5	7.5	10.0	10.0
φd	0.6	0.6*	0.8	0.8	1.0	1.0
β	0.5	0.5	0.5	0.5	0.5	1.0

\* In case L &gt; 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

α	(φD < 20): 1.5
	(φD ≥ 20): 2.0

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

## UPT

## ■ Dimensions

Cap	Code	V	200		220		250		400		420		450		
			2D	2P	2E			2G		W6		2W			
15	150												10 × 31.5	0.15	
18	180									10 × 31.5	0.17	12.5 × 25		0.18	
22	220							10 × 31.5	0.21	12.5 × 25	0.20	12.5 × 31.5		0.22	
27	270							12.5 × 25	0.24	12.5 × 31.5	0.24	12.5 × 31.5		0.25	
33	330							12.5 × 31.5	0.29	12.5 × 31.5	0.27	12.5 × 35.5		0.28	
39	390							12.5 × 31.5	0.32	12.5 × 35.5	0.31	12.5 × 40		0.32	
47	470						10 × 31.5	0.27	12.5 × 35.5	0.37	12.5 × 40	0.36	16 × 31.5		0.38
56	560			10 × 31.5	0.29	12.5 × 25	0.31	12.5 × 40	0.42	16 × 31.5	0.43	16 × 35.5		0.44	
68	680	10 × 31.5	0.35	12.5 × 25	0.34	12.5 × 31.5	0.36	16 × 31.5	0.46	16 × 35.5	0.51	16 × 40		0.49	
										▲18 × 31.5	0.51	▲18 × 31.5		0.48	
82	820	12.5 × 25	0.41	12.5 × 31.5	0.39	12.5 × 31.5	0.40	16 × 31.5	0.50	16 × 40	0.57		18 × 35.5		0.55
										▲18 × 31.5	0.57				
100	101	12.5 × 31.5	0.48	12.5 × 31.5	0.43	12.5 × 35.5	0.46	16 × 35.5	0.58	18 × 35.5	0.61	18 × 40		0.65	
								▲18 × 31.5	0.58						
120	121	12.5 × 31.5	0.53	12.5 × 35.5	0.49	12.5 × 40	0.53	16 × 40	0.66	18 × 40	0.66	22 × 40		0.77	
								▲18 × 35.5	0.67						
150	151	12.5 × 35.5	0.62	12.5 × 40	0.58	16 × 31.5	0.62	18 × 40	0.77	22 × 40	0.80	22 × 50		0.92	
										▲25 × 40	0.92				
180	181	12.5 × 40	0.70	16 × 31.5	0.67	16 × 35.5	0.72	22 × 40	0.85	22 × 50	0.95		25 × 50		1.10
						▲18 × 31.5	0.72			▲25 × 40	0.95				
220	221	16 × 31.5	0.76	16 × 35.5	0.77	16 × 40	0.83								
		▲18 × 31.5	0.81	▲18 × 31.5	0.77	▲18 × 35.5	0.83								
270	271	16 × 35.5	0.88	16 × 40	0.88	18 × 40	0.95	22 × 50	1.30	25 × 50	1.20				
		▲18 × 31.5	0.87	▲18 × 35.5	0.88			▲25 × 40	1.30						
330	331	18 × 35.5	1.01	18 × 40	1.01	22 × 40	1.05	25 × 50	1.40						
390	391	18 × 40	1.13	22 × 40	1.15										
470	471	22 × 40	1.20			22 × 50	1.45								
						▲25 × 40	1.45								
560	561				22 × 50	1.50	25 × 50	1.55							
					▲25 × 40	1.50									
680	681	22 × 50	1.50	25 × 50	1.60										
		▲25 × 40	1.50												
820	821	25 × 50	1.60										Case size Φ D × L(mm)	※	

※ : Rated ripple current (Arms) at 105°C 120Hz

▲: In this case, ⑥ will be put at 12th digit of type numbering system.

## • Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.80	1.00	1.25	1.40	1.60