



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Part Number: US0014-001

Model Number: T/R975-US0014L353-01

Overview

The ultrasonic flow sensor is used as the core element of ultrasonic flow meters. Ultrasonic flow measurement uses the transit time principle, whereby opposite sending and receiving ultrasonic flow sensors are used to transmit signals through the flow. The signal travels faster when moving with the flow stream rather than against the flow stream. The difference between the two transit times is used to calculate the flow rate.

Appearance and Dimensions, Unit: mm

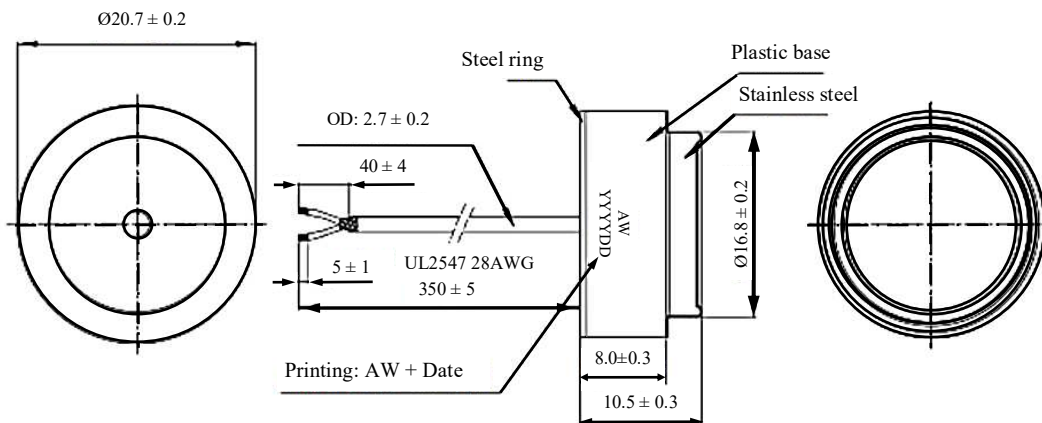

Electrical Specifications

Item	Unit	Standard	Test Condition T=25 °C
Thick Resonant frequency (Fs)	KHz	975 ± 30	Agilent 4294A
Resonant impedance (R)	Ω	≤ 110	Agilent 4294A
Static capacitance (C ₀)	pF	$1150 \pm 20\%$	Digital Bridge At 1000Hz/1V
Storage Temperature	°C	-25 ~ +55	
Operating Temperature	°C	+4 ~ +90	

TENTATIVE RELEASE:

This specification is based on design objectives and is strictly Preliminary and subject to change. Test data may exist, but this specification is subject to change based on the results of additional testing and evaluation. Application specific specifications will be produced for approval prior to production product being released.

Part No.	Rev	Title	Sheet No.
US0014-001	A5	Ultrasonic Flow Sensor	1 of 2

Notes:

1. Please take Anti interference into consideration when designing driving circuit.
2. Driving voltage is suggested to be lower than 5Vp-p.
3. Maximum pressure endurance is 2.5MPa.

Revision History:

Version	Date (MM/DD/YY)	DWN	Statement
	1/19/2013		Specifications
A5	3/17/2015		Adjust specification format

TENTATIVE RELEASE:

This specification is based on design objectives and is strictly Preliminary and subject to change. Test data may exist, but this specification is subject to change based on the results of additional testing and evaluation. Application specific specifications will be produced for approval prior to production product being released.

<u>Part No.</u>	<u>Rev</u>	<u>Title</u>	<u>Sheet No.</u>
US0014-001	A5	Ultrasonic Flow Sensor	2 of 2