



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Mercury™ T2 USB 2.0 Protocol Analyzer



Key Features

■ Portable and Affordable

Compact, bus-powered system measures 3.0" x 3.5", weighs 5 oz.

■ Supports USB 2.0

Capable of capturing all USB speeds up to 2.0 including OTG (On-the-Go)

■ 256 MB Recording Memory

Extend capture time with spool-to-disk recording

■ High Impedance probe

Non-intrusive probe preserves real-world signal and timing conditions

■ Advanced Triggering

Isolates important traffic, specific errors or patterns

■ Extensive Decodes

Mass storage, Bluetooth HCI, Hub, PTP/Still Image, Printer, Human Interface Device (HID), Audio, Video and Communication

■ Hardware Filtering

Automatically exclude non-essential traffic

■ Event Reporting

Quickly identify and track error rates, abnormal bus activity or timing conditions


The Teledyne LeCroy Mercury T2 is the industry's smallest, most affordable hardware-based USB 2.0 protocol analyzer that combines the de-facto standard CATC Trace display with the very latest USB class decoding. The Mercury T2 fits in a shirt pocket yet provides much of the same lab quality protocol analysis capabilities offered in Teledyne LeCroy's top-of-the-line USB analyzers.

View and Understand USB Protocol

Featuring the industry-leading CATC Trace™ expert analysis software, the Mercury T2 system provides an easy-to-use display that graphically decodes logical protocol events. With the Standard or Advanced edition, all protocol layers can be expanded to show the underlying transactions and packets. Tooltips help explain protocol events making it easier for non-experts to identify errors.

Real Time Triggering

Isolating specific protocol events with real time triggering is essential to capture intermittent problems. The Mercury T2 provides sophisticated triggering with drag-and-drop selections for PID type, data patterns, standard requests, errors, and bus events. The Mercury T2 features 256 MB of on-board memory and also supports spool-to-disk capture for extended recording.

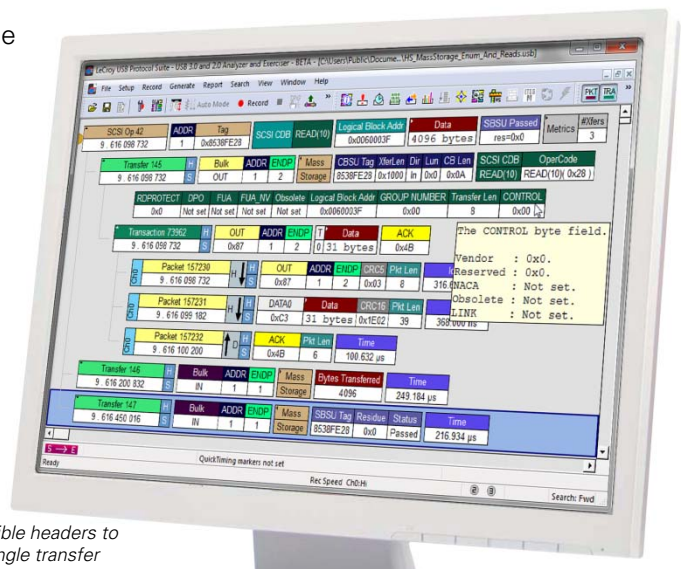

The CATC Trace display uses collapsible headers to group all packets that are part of a single transfer

USB Device Decoding

Comprehensive USB device class decoding is included in every model of the Mercury T2. This allows users to see upper-level mapped protocol events within the trace, eliminating the tedious process of manually decoding device specific commands.

Find the Issues Fast

The Mercury T2 provides many mechanisms to measure and report on USB traffic. The Bus Utilization display shows data, packet length, and bus usage by device. Using the Traffic Summary window, users can evaluate statistical reports at a glance or navigate to individual fields. Real time statistics show throughput by endpoint.

Performance monitor shows throughput in real-time

Bus Utilization graphs track throughput in real time

Traffic summaries provide detailed metrics for events within a trace

Zero-Time Search™ only shows events that occur in the trace

Tooltips provide explanations of protocol layer events

Feature Comparison	Mercury T2 Standard USB 2.0	Mercury T2 Advanced USB 2.0
USB2.0 / USB1.1 Recording	✓	✓
Spool-to-Disk Recording	✓	✓
Recording Memory	256 MB	256 MB
USB 2.0 Event Triggering	✓	✓
PID Type and Dev Address	✓	✓
Data Pattern	✓	✓
Max States per Sequence	4	7
No. of Sequences	2	2
USB Real-time Statistics (RTS)		✓
Export to .CSV		✓
Automation API		✓
Verification Script Engine (VSE)		✓

Specifications

Host Requirements	Windows 7 or Windows 8
Standard Trigger Events	Packet Identifier, Token Pattern, Frame Pattern, Device Request, Data Pattern, Bus Conditions, Errors, Transactions, Data Length, Splits
Reporting & Statistics	Packet Level, Transaction Level, Transfer Level, Error Reports
Recording Memory Size	256 MB
Power Consumption	Idle: 500 mA (typical); Active: 560 mA (typical)
Connectors	USB Standard "A" and "B" receptacles
Temperature	Operating: 0°C to 55°C (32°F to 131°F) Non-Operating: -20°C to 80°C (-4°F to 176°F)
Humidity	Operating: 10% to 90% non-condensing
Dimensions	80 x 90 x 24 mm (3.0" x 3.6" x 1")
Net Weight	158g (5.8 oz)



1-800-909-7211
teledynelecroy.com



Local sales offices are located throughout the world.
Visit our website to find the most convenient location.