



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NXP-Freescale i.MX6

MicroSoM i4x4

Quad Core SoM (System-On-Module)

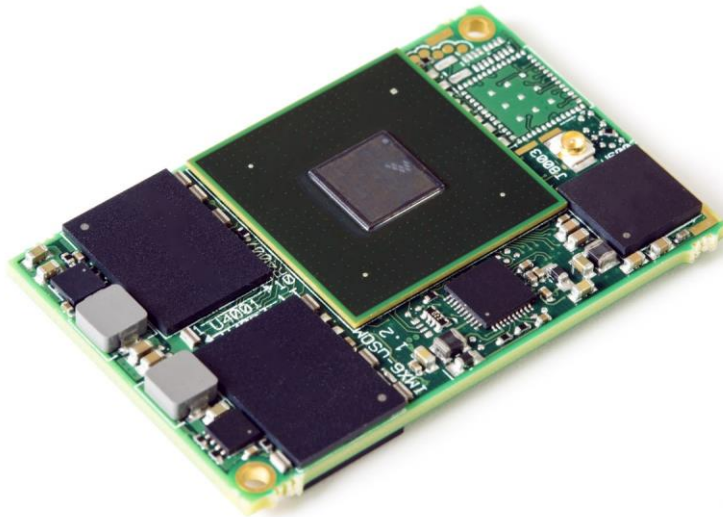

Simple. Robust. Computing Solutions

SolidRun Ltd.

3 Dolev st., 3rd floor, P.O. Box 75
Migdal Tefen 2495900, Israel.

www.solid-run.com

Overview

Expands the memory size to 4GB DRAM along with a Quad Core CPU .

The MicroSoM i4x4 Highlighted Features:

- Based on NXP's iMX6 Quad Core SoC
- 4GB DDR3
- Small size 47mmx30mm
- Variety of temperature grades:
 - Commercial 0°C...60°C
 - Extended -20°C...70°C
 - Industrial -40°C...85°C
 - Automotive -40°C...105°C
- Long longevity of 10 years
- Low power consumption

System Specifications


i.MX6 Quad	
Processor core	Quad core ARM A9
Processor speed	1GHz (up to 1.2GHz)
Floating Point	VFPv3
SIMD	NEON
Graphics Processing Unit	Vivante GC2000
3D GPU Support	OpenGL ES 1.1/2.0 OpenCL 1.1E
HW Video Dec/Enc	Multi Format
Memory	64 bit, 4GB DDR3 @ 1066Mbps
Wired Network	10/100/1000 Mbps*
Wireless Network	Optional
Bluetooth	Optional
Display Max resolution	HDMI: 1080p, LCD: WUXGA (1920×1200)
Display Interfaces	LVDS, HDMI 1.4, DSI, Parallel
Dual display support	✓
Supported External Storage	NOR-Flash, eMMC, SD/microSD, PCIe SSD
SD/MMC	3
USB 2.0 host	1
USB OTG	1
Serial ports	3
Digital audio serial interface	1
Camera interface port	4 Lane CSI
CAN bus	✓**
S-ATA	Gen II, 3Gbps
PCI-Express 2.0	×1
Second Ethernet	Via PCIe or USB NIC
I2C	3
SPI	3
PWM	4

i.MX6 Quad	
GPIO	75
JTAG	Test Point Header
S/PDIF Input	✓
S/PDIF Output	✓
1-Wire	1-Wire Transceiver on carrier board
Main Voltage	5V
IO Voltage	3.3V
SoM interface	Hirose DF40 connectors 1.5mm up to 4.0mm mating height
Dimensions (W×L)	47mm×30mm

(*) Note that due to internal i.MX6 buses the 1000Mbps interface speed is limited to 470Mbps.

(**) Will be supported on MicroSoM v1.4.

Block Diagram

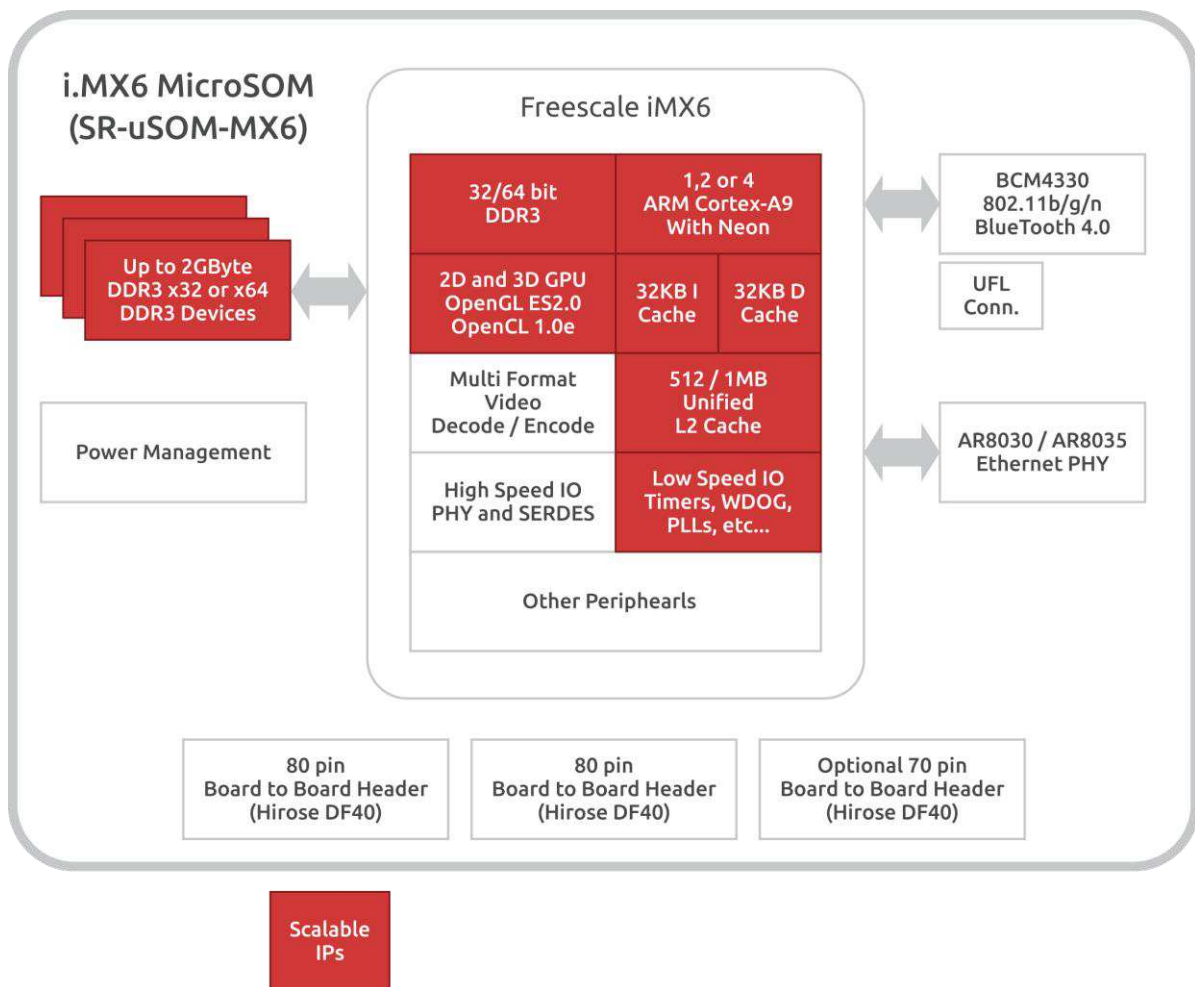

Ordering Information

SKU Format
usomxyz-3c

Legend

	Meaning	Options	Description
usom	Product Family	none	Fixed parameter- MicroSoM Family
xx	MicroSoM Type	01	MicroSoM i1
		02	MicroSoM i2
		03	MicroSoM i2eX
		04	MicroSoM i4P
		05	MicroSoM i4x4
y	Temperature Range	none	Commercial Temperature Range
		e	Extended Temperature Range
		i	Industrial Temperature Range
		a	Automotive Temperature Range
z	WiFi/BT	none	No WiFi/BT
		w	Include WiFi/BT
3c	3 Board to Board Connectors	None	Fixed parameter

Available SKUs for MicroSoM i4x4

SKU	Description
usom05-3c	MicroSoM i4x4
usom05w-3c	MicroSoM i4x4 + WiFi/BT
usom05e-3c	MicroSom i4x4- Extended Temperature
usom05ew-3c	MicroSom i4x4- Extended Temperature + WiFi/BT
usom05i-3c	MicroSom i4x4- Industrial Temperature
usom05iw-3c	MicroSom i4x4- Industrial Temperature + WiFi/BT
usom05a-3c	MicroSom i4x4- Automotive Temperature
usom05aw-3c	MicroSom i4x4- Automotive Temperature + WiFi/BT

Safety notice

- a. This device is to be used with Certified Power adaptor with output rated 5VDC, 3A. Power adapter must meet Limited power source (LPS) requirements.
- b. Power adapter must meet local safety standards and requirements based on product intended use.
- c. Power adapter must meet Operating environment conditions as specified above.

Disposal

Follow local regulations regarding disposal of the product. Dispose of your product in accordance with local regulations. In some areas, the disposal of these items in household or business trash may be prohibited.

Help us protect the environment- recycle!

IMPORTANT NOTICE – Please Read Carefully

No warranty of accuracy is given concerning the contents of the information contained in this document. To the extent permitted by law no liability (including liability to any person by reason of negligence) will be accepted by SolidRun Ltd. Or its employees for any direct or indirect loss or damage caused by omissions from or inaccuracies in this document.

SolidRun Ltd. Reserves the right to change details in this publication without notice

Product and company names herein may be the trademarks of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

Support

For technical support please visit:

Our Wiki – <http://wiki.solid-run.com/>

Our Forums - <http://forum.solid-run.com/>

For direct support please contact us at: support@solid-run.com