

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


THIS DRAWING IS UNPUBLISHED.  
RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.  
© COPYRIGHT - By -

LOC DF DIST DO  
P LTR K1  
DESCRIPTION REVISED PER ECO-11-005139  
DATE 21MAR11 DWN APVD  
REV K1 HMR

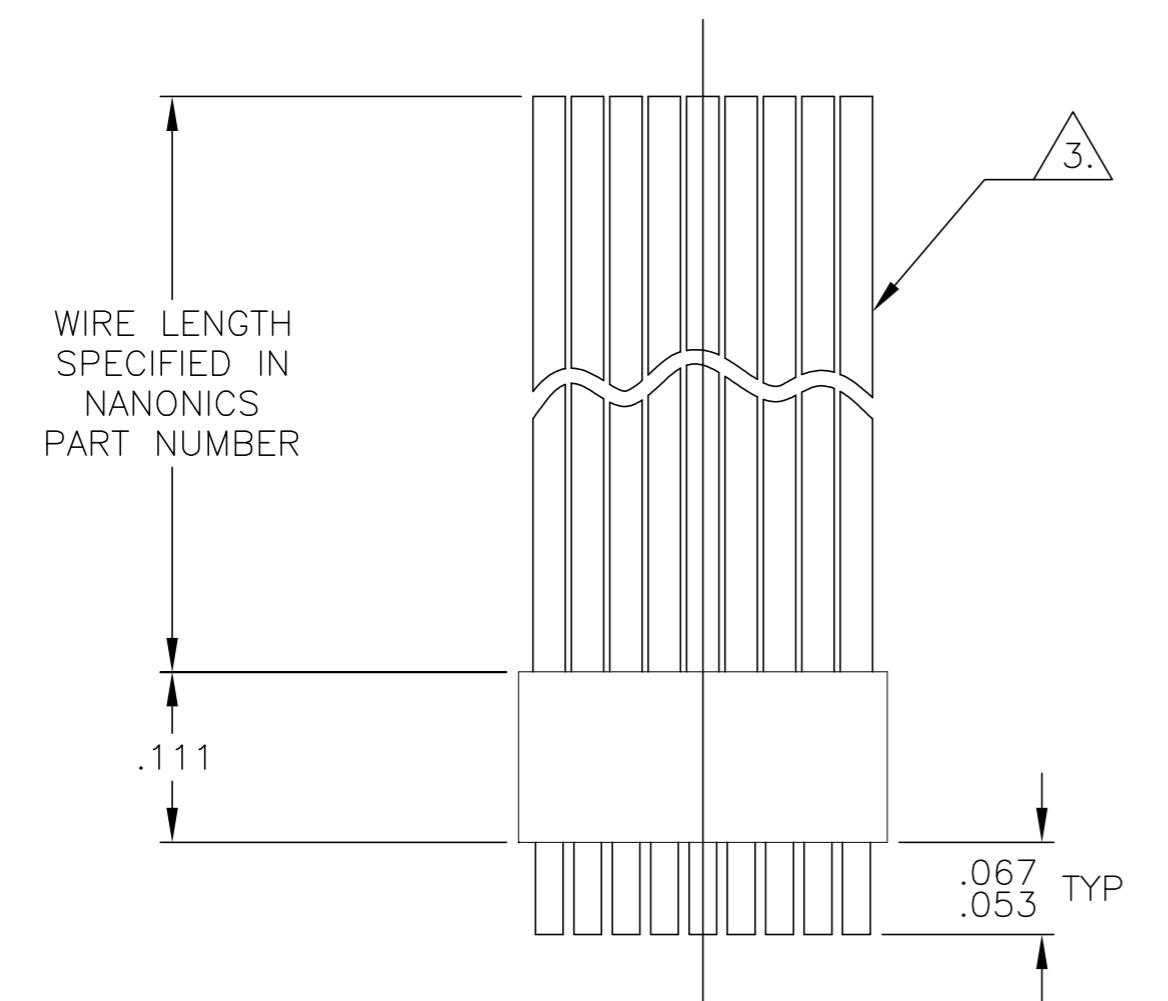


SIZE	C DIM	(L DIM)
04	.115	(.075)
09	.240	(.200)
15	.390	(.350)

4.	25	.640	(.600)
4.	37	.940	(.900)
4.	51	1.290	(1.250)

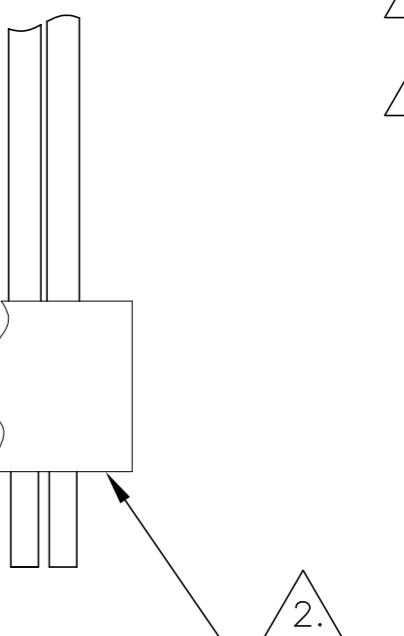

DETAIL A  
POSITION "T" SHOWN FOR  
REFERENCE

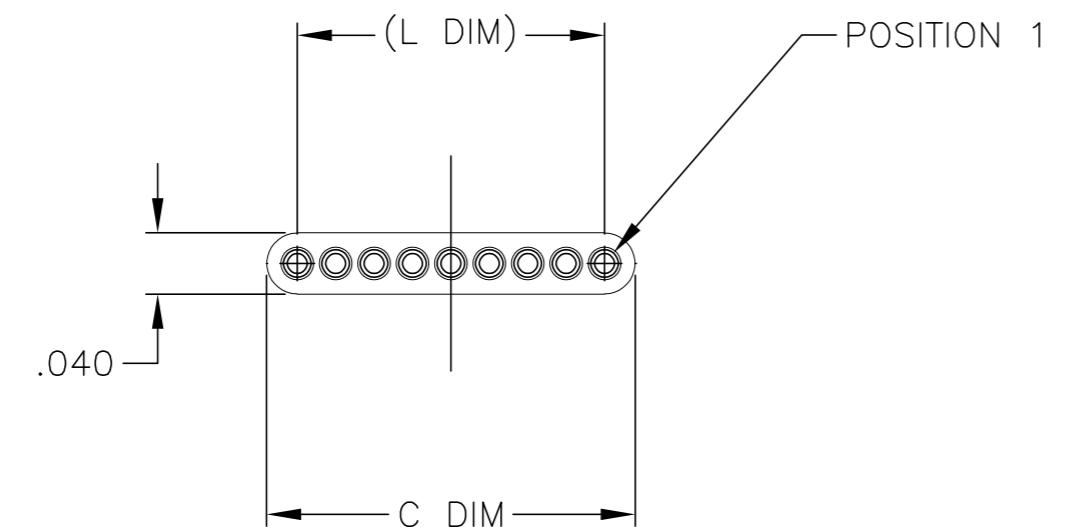

T		POSITION 1
U		POSITION 2
V		POSITION 3
W		POSITION 1, AND SECOND TO LAST POSITION
Y		POSITION 1, AND THIRD TO LAST POSITION
Z		POSITION 2, AND THIRD TO LAST POSITION

1. INSULATOR MATERIAL: LCP (LIQUID CRYSTAL POLYMER) PER ASTM D5138

2. OPTIONAL POLARIZATION POSITION SHOWN FOR REFERENCE ONLY. IF POLARIZATION GUIDE POST(S) ARE REQUIRED ON THE MATING PLUG, THE CORRESPONDING LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER. THE CONTACT CAVITY IS LEFT EMPTY FOR ACCEPTANCE OF THE PLUG GUIDE POST.

3. THIS CONFIGURATION MAY BE TERMINATED WITH 28 AWG SOLID, 30 AWG STRANDED OR SMALLER WIRE. CONDUCTOR TYPE AND LENGTH MUST BE SPECIFIED IN NANONICS PART NUMBER.

4. WHEN ORDERING THESE SIZES, FIRST CONSULT TE CONNECTIVITY/NANONICS FOR ADDITIONAL INFORMATION.

5. THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/002

THIS DRAWING IS A CONTROLLED DOCUMENT.		16 APR 1992
D RYAN		17 FEB 1993
E BURGER		APVD 25 APR 2001
M STORRY		PRODUCT SPEC
		APPLICATION SPEC
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC		ANGLES $\pm .010$ $\pm .005$ $\pm 1^\circ$
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:
		WEIGHT —
MATERIAL SEE NOTES		FINISH SEE NOTES
SEE NOTES		SEE NOTES
CUSTOMER DRAWING		RESTRICTED TO
A2 00779 C-1589449		—
SCALE 8:1		REV K1
CAGE CODE DRAWING NO		1 OF 1