



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






## Lightweight and sealed

The solution for indoor applications  
using 1 standard AWG16 contact

- |                                |   |                          |
|--------------------------------|---|--------------------------|
| Secure for indoor applications | ✓ | Flame retardant material |
| Water jet & underwater proof   | ✓ | IP68/IP69K               |
| Easy to handle                 | ✓ | Ergonomic design         |
| Wire sealing                   | ✓ | Grommet option           |
| High contact density           | ✓ | Up to 23 contacts #16    |



# SOURIAU on the railway market



Standard

*The SOURIAU solution offers a wide range of connector layouts providing a simplified process from purchasing to harnessing: 1 type of contact to order, to manage, to stock, to crimp for a wide range of connectors.*

*SOURIAU's standardisation policy is the best compromise between technology and cost.*



High Speed

*SOURIAU connectors ensure the continuity of the network with railway qualified connectors integrating new technologies: copper contacts, Quadrax and fibre optics to transfer high speed Ethernet and other data protocols.*



E & S

*SOURIAU, along with its customers is committed to the research of energy efficiency and sustainability.*

*The use of lightweight materials, fiber optics and high contact density contribute to the weight reduction of train equipments and help railway operators to save energy.*



## Technical features

- Housing: thermoplastic
- $\geq 500$  hours salt spray resistant
- Bayonet coupling
- Mating cycles: 250 mating cycles
- Vibration & shocks: sinusoidal vibrations per CEI 60512-4 from 1 to 2000Hz
- Max current per contact: 15Amps
- Insulation resistance: 5000M $\Omega$
- Withstanding voltage: 2550Vac following NFF 61030
- Flammability rating: UL94-VO, I2F3/I3F2 following NFF 16-101 / 16-102
- Sealing: IP68/69K with suitable accessories
- Operating temperature: -40°C / +105°C  
40/100/21 per NFF 61-030

**Rated insulation voltage  $U_{Nm}$  \* according to EN 50-124-1: "Railway applications - Insulation coordination".**

The rated insulation voltage  $U_{Nm}$  \* is given per layout according to:

- overvoltage level:
  - OV3 means a 2500V rated impulse voltage
- pollution degree of the environment:
  - PD2 means only non conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected
  - PD3 means conductive pollution occurs or dry non conductive pollution occurs which becomes conductive due to condensation which is to be expected
- creepage and clearance, depending on the insert and the type of the contacts used:
  - for layouts that use AWG16 contacts we recommend to use shorter female contacts (RC16M23GE7K) to reach a higher operating voltage level.

**$U_{Nm}$  \* is not the working voltage.**

**$U_{Nm}$  \* has to be chosen according to the voltage of the power supply  $U_n$ .**

\*Definition of  $U_{Nm}$  rated insulation voltage (EN 50-124-1): r.m.s. withstand voltage value assigned by the manufacturer to the equipment or to a part of it, characterizing the specified (long-term) withstand capability of its insulation. NOTE: The rated insulation voltage is not necessarily equal to the-rated voltage of equipment which is primarily related to functional performance.

Example for a battery supply system:

Power supply Voltage $U_n$	Minimum rated insulation voltage $U_{Nm}$ of the electrical circuit on:	
	Rolling stock (kV)	Fixed installations (kV)
Battery supply system (V)		
24 & 36	0.05	0.05
48 & 72	0.1	0.1
110 & 120	0.15	0.15

Extract from EN50-124-1 Appendix D

For more details please refer to UTS catalog.

## Ordering information

	UTS	0	14	12	S	N
	UTS	1	14	12	P	N
	UTS	6	14	12	P	N
	UTS	7	14	12	S	N
<b>Shell style:</b>						
0: Square flange receptacle						
1: In line receptacle						
6: Cable plug						
7: Jam nut receptacle						
<b>Shell size:</b>						
10 – 12 – 14 – 16 – 18						
<b>Contact layout:</b> see page 4						
<b>Contact type:</b>						
P: Pin						
S: Socket						
<b>Orientation:</b>						
No letter: standard version						
W,X,Y,Z: different orientations (consult factory)						



## Contact layouts

### Size 10

10-3




3Ø1.6 (#16)

$U_{Nm}$

300V - OV3 - PD2  
220V - OV3 - PD3

10-4



4Ø1.6 (#16)

$U_{Nm}$

150V - OV3 - PD2  
150V - OV3 - PD3

102W2



2Ø2.4 (#12)  
2Ø1.0 (#20)

$U_{Nm}$

300V - OV3 - PD2  
220V - OV3 - PD3

### Size 12

12-4



4Ø1.6 (#16)

$U_{Nm}$

300V - OV3 - PD2  
260V - OV3 - PD3

12-8




8Ø1.6 (#16)

$U_{Nm}$

150V - OV3 - PD2  
100V - OV3 - PD3

### Size 14

142G1




3Ø3.6 (#8)

$U_{Nm}$

300V - OV3 - PD2  
220V - OV3 - PD3

14-7




7Ø1.6 (#16)

$U_{Nm}$

300V - OV3 - PD2  
260V - OV3 - PD3

14-12




12Ø1.6 (#16)

$U_{Nm}$

150V - OV3 - PD2  
80V - OV3 - PD3

### Size 18

18-23



23Ø1.6 (#16)



$U_{Nm}$

150V - OV3 - PD2  
80V - OV3 - PD3



## Receptacle

### Square flange receptacle

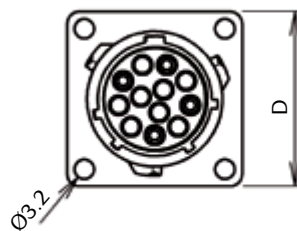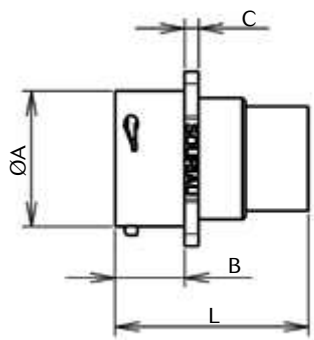

Front view


Part number	Shell size	L	ØA	B	C	D
For male contacts						
UTS0104P	10	31.7	15	11.35	2.3	23.8
UTS0124P	12		19			26.2
UTS0128P	14		22.2			28.6
UTS01412P	18		28.5		2.5	33.3
UTS01823P						

Part number	Shell size	L	ØA	B	C	D	
For female contacts							
UTS0104S	10	31.7	15	11.35	2.3	23.8	
UTS0128S	12		19			26.2	
UTS01412S	14		22.2			28.6	
UTS01823S	18		28.5			2.5	33.3

Note : all dimensions are in mm



## Jam nut receptacle

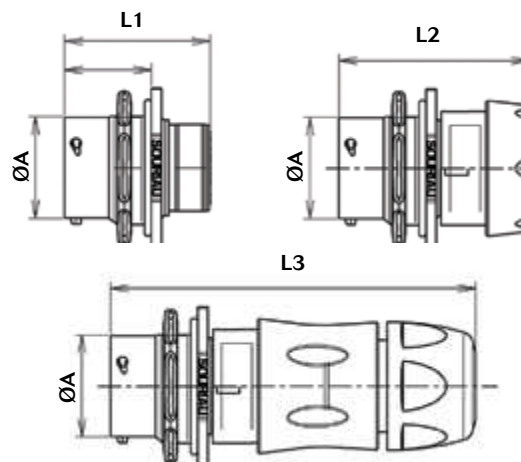

Part number	Shell size	L1	L2	L3	ØA	B	C	D	Connector type	Termination		
For male contacts												
UTS7103P	10	33.9			14.9	19.3	27	22.2	UTS standard			
UTS7104P					19		31.8	27				
UTS7102W2P					19		31.8	27				
UTS7124P	12	35.75		22.2	34.9		30.2					
UTS7127P					34.9		30.2					
UTS7142G1P	14	33.9		22.2	28.5		41.3	36.6				
UTS7147P					27		22.2					
UTS71412P					27		22.2					
UTS71823P	18				28.5		41.3	36.6			Discrete wire sealing	Nut and grommet
UTS7GN104P	10		41		14.9		27	22.2				
UTS7GN128P	12		40.7		19	31.8	27					
UTS7GN147P	14		43		22.2		34.9	30.2	Discrete wire sealing	Cable gland and grommet		
UTS7GN1412P												
UTS7GJC104P	10			70.5	14.9		27	22.2	Discrete wire sealing	Cable gland and grommet		
UTS7GJC128P	12			74	19		31.8	27				
UTS7GJC147P	14			80.5	22.2		34.9	30.2				
UTS7GJC1412P												


Part number	Shell size	L1	L2	L3	ØA	B	C	D	Connector type	
For male contacts										
UTS7103S	10	33.9			14.9	19.3	27	22.2	UTS standard	
UTS7104S					19		31.8	27		
UTS7102W2S					19		31.8	27		
UTS7124S	12	33.9	-	-	22.2		34.9	30.2		
UTS7127S					22.2		34.9	30.2		
UTS7142G1S	14	33.9			22.2		34.9	30.2		
UTS7147S					22.2		34.9	30.2		
UTS71412S					22.2		34.9	30.2		
UTS71823S	18				28.5		41.3	36.6		

Note : all dimensions are in mm




## Plug

### Plug with cable gland

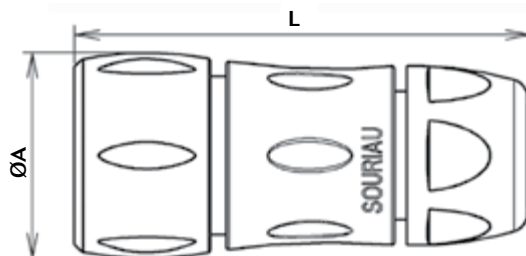

Part number		Shell size	L	ØA	Termination
For male contacts	For female contacts				
UTS6JC103P	UTS6JC103S	10	63.2	26.7	Cable gland
UTS6JC104P	UTS6JC104S				
UTS6JC102W2P	UTS6JC102W2S				
UTS6JC124P	UTS6JC124S	12	66.7	30.2	
UTS6JC128P	UTS6JC128S				
UTS6JC142G1P	UTS6JC142G1S	14	71.5	35.1	
UTS6JC147P	UTS6JC147S				
UTS6JC1412P	UTS6JC1412S				
UTS6JC1823P	UTS6JC1823S	18	81.3	42	

### Plug with grommet

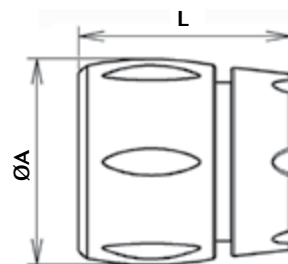

Part number		Shell size	L	ØA	Termination
Only available for female contacts					
UTS6GN104S		10	32	26.2	Nut & grommet
UTS6GN128S		12	32.3	29.7	
UTS6GN147S		14	32	34.6	
UTS6GN1412S					
UTS6GJC104S		10	61.5	26.2	Cable gland & grommet
UTS6GJC128S		12	64.5	29.7	
UTS6GJC147S		14	70	34.6	
UTS6GJC1412S					


Note : all dimensions are in mm





## In line receptacle

### In line receptacle with accessories

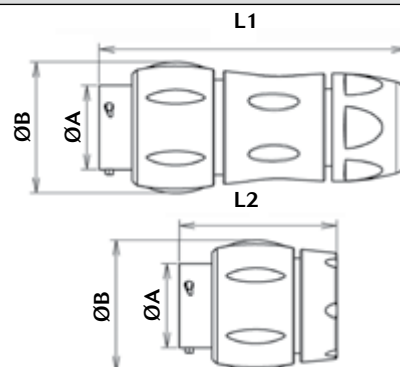

Part number	Shell size	L1	L2	ØA	ØB	Connector type	Termination
For male contacts							
UTS1JC103P	10	70		14.9	26.7	UTS standard	
UTS1JC104P				19	30.1		
UTS1JC102W2P							
UTS1JC124P	12	74		22.2	35.1		
UTS1JC127P							
UTS1JC142G1P	14	78.5		28.5	42		
UTS1JC147P				22.2	34.6		
UTS1JC1412P							
UTS1JC1823P	18	89		40.9	14.9		
UTS1GN104P	10		40.9	19	29.7		
UTS1GN128P	12		43	22.2	34.6		
UTS1GN147P	14						
UTS1GN1412P						Cable gland and grommet	
UTS1GJC104P	10	70.7	14.9	26.2			
UTS1GJC128P	12	74.5	19	29.7			
UTS1GJC147P	14	80.5	22.2	34.6			
UTS1GJC1412P							

Part number	Shell size	L1	L2	ØA	ØB	Connector type	Termination
For female contacts							
UTS1JC103S	10	70	-	14.9	26.7	UTS standard	
UTS1JC104S				19	30.1		
UTS1JC102W2S							
UTS1JC124S	12	74		22.2	35.1		
UTS1JC127S							
UTS1JC142G1S	14	78.5		28.5	42		
UTS1JC147S				22.2	34.6		
UTS1JC1412S							
UTS1JC1823S	18	89					

For further information, click here [www.railway-connectors.com](http://www.railway-connectors.com)  
Or contact us click here [contactindustry@souriau.com](mailto:contactindustry@souriau.com)

Note : all dimensions are in mm