

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SCALE 3:2

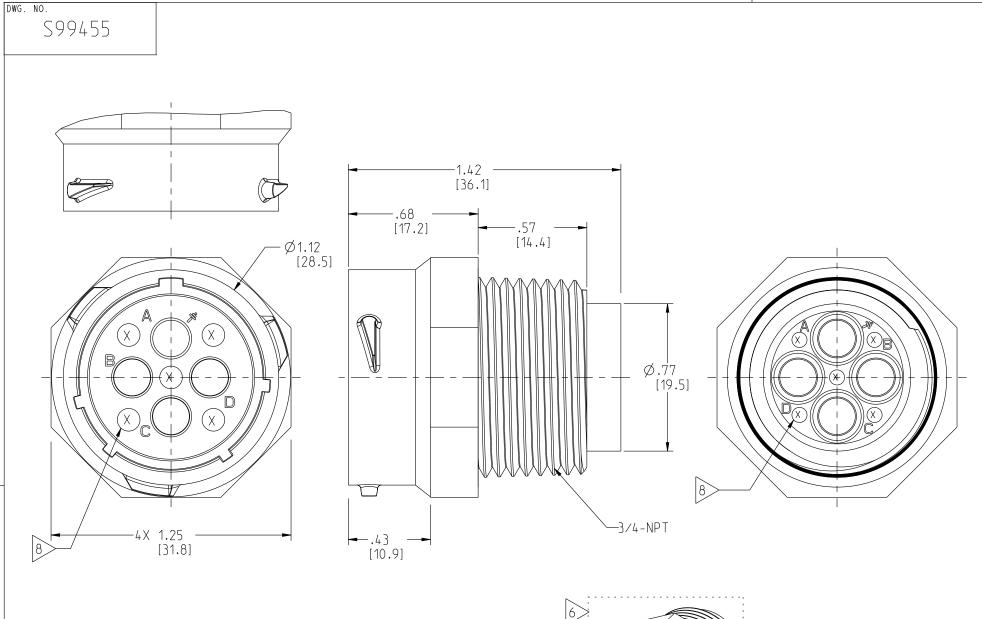

Client Drawing Approval

The signature above indicates the client's authorized representative has

herein If no signature is provided, placement of a purchase order by the

reviewed, understands, and concurrs with the requirements defined

Option

Approved with no Exceptions

Approved with Exceptions Noted

Revision/Resubmission Required

- 1. MATES WITH UTS6_ _183G1P.
- 2. USES 1-TO-4 EA. SIZE-8 SOCKET (CONTACTS ORDERED SEPARATELY) CONTACT TYPE: 829116____: REFER TO SOURIAU BSD202333002.
- 3. MATERIALS:
- 3.1 HOUSING: POLYAMIDE UL94VO, COLOR-BLACK.
 3.2 ALL MATERIALS ARE ROHS COMPLIANT.
- MECHANICAL PERFORMANCE:
- OPERATING TEMPERTURE: -40°C TO +105°C.
- CORROSION: SALT SPRAY, 500 HOURS.
- DURABILITY: 250 MATE-UNMATE CYCLES.
 SEALING: WHEN MATED TO CABLE PLUG (NOTE-1): IEC 60529-IP68: 10m WATER, 1-WEEK;
 - -IP69K: HIGH-PRESSURE WATER, DIN 40050. TYPICAL INSTALLATION: OUTLET BOX.
- RECOMMENDED TOOLS: 8-POINT 1 1/4 SOCKET; MAX. TORQUE 66 in.-Lb.
- 5. ELECTRICAL PERFORMANCE:
- DIELECTRIC WITHSTANDING VOLTAGE / INSULATION RESISTANCE. 2200 Vrms MAX. BETWEEN CIRCUITS / 5000 MOhm MIN. @ 500 VDC.
- OPERATING VOLTAGE: 600 VAC MAX.
- CIRCUIT USE:
 - B,C,D: 44 AMP MAX. A: GROUND: FIRST MATE LAST BREAK.
- PACKAGING: RUBBER WASHER IS BULK-PACKAGED.
- 7. UL1977 RECOGNIZED.
- MOLDING "VOID CORES" ARE INDICATED "X".

LABEL INCLUDES SOURIAU P/N & QTY.

- >PANEL CUTOUT IF APPLICABLE: TAP DRILL 59/64 OR .922 INCH (23.42mm) 3/4-NPT INTERNAL THREAD.
- 10. UNITED STATES PATENT 7,955,125

D	REVISED PER ECN 11721	RSK 05-16-12	NPP 05-16-12
C	REVISED PER ECN 11550	SSF 11-03-11	NPP 11-03-11
В	REVISED PER ECN 11483	RSK 08-11-11	NPP 08-11-11
А	RELEASED PER ECN 11441	SSF 5/23/2011	NPP 5/23/2011
REV	DESCRIPTION	BY Date	CHKD DATE

DRAWING TITLE

UTS RECEPTACLE, SIZE-18, NPT-3/4 CAT NO. **UTS7183G1SNPT**

CAGE NO: 09922

SCALE 1:1

INCH [mm]

±.1 [±3]

(INCH)

THIRD ANGLE PROJECTION

TOLERANCES

UNLESS OTHERWISE SPECIFIED No. OF PLACES | INCH [mm]

TWO PLACES ±0.02 [±.5]

THREE PLACES | ±0.010 [±.25]

ANGLES±1°

ONE PLACE

MEASURE:

SCALE 1:1

Authorized Signature

& Date

Company Name

SIZE: B

CUSTOMER

INTERPRET THIS DRAWING IN ACCORDANCE

SOURIAU Connection Technology	

	APPR0\	DSGN	:	NP	4/19/10		
		MFG	:	DH	4/19/10		
	∀	QC	:	BB	4/19/10		
DRAWING SCALE: 2:1							
		DRAW	REV				
	S99455				D		
			1	OL_{4}			

DRAWN:

₹ CHKD :

WITH ASME Y14.5M - 1994.

www.souriau.com

client is considered drawing acceptance.

Rejected

PRO-E

4/19/10