

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

**V3L-3339**

CQ-X2868

REPLACES X91253-V3L

**V3L-3339**



CATALOG LISTING

**M**

2

RELEASE NO.: PR-19362

REPLACES X91253-V3L

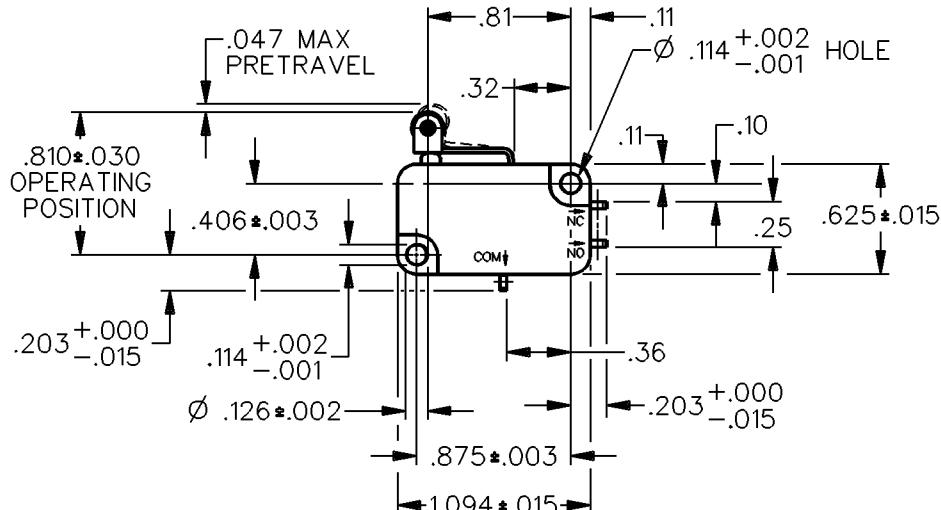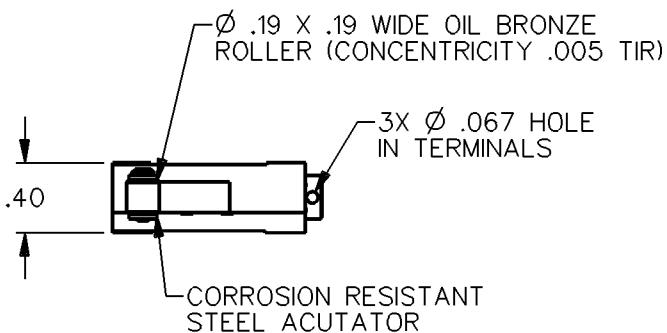

NOTES

- 1 - TERMINALS ARE SILVER PLATED FOR SOLDERING
- 2 - SWITCH MATERIAL WILL WITHSTAND TEMPERATURE OF 300°F
- 3 - HOLE IN TERMINALS MAY BREAK OUT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 15 GRAMS MIN	L83 15.1A 1/2HP 125, <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"	ONE PLACE (.0) ± .030	
DIFFERENTIAL TRAVEL — — — .002-.010		TWO PLACE (.00) ± .015	
OVERTRAVEL — — — .040 MIN		THREE PLACE (.000) ± .005	
RELEASE TRAVEL — — — .007 MIN		ANGLES ±	
		WEIGHT	

DDM / CAD

DRAWN

J A L 9 MAR 92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D

C

S

18

MAR

92

CHECK

D