



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PRODUCT NUMBER	PITCH
V7xx71x000J0G	5.00 mm

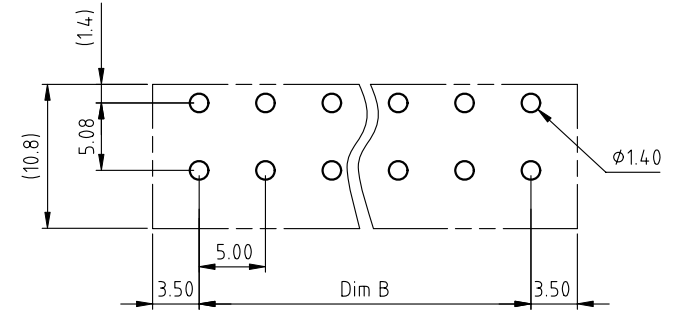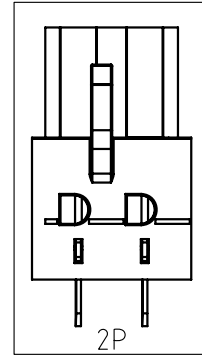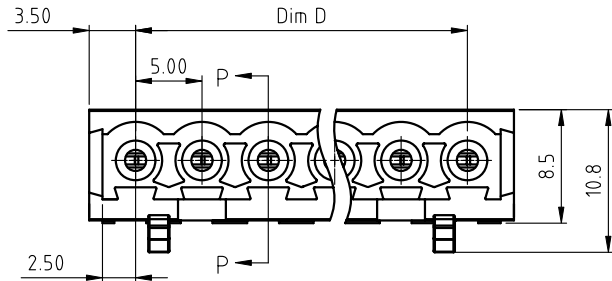

RECOMMENDED P.C.B LAYOUT
TOP VIEW

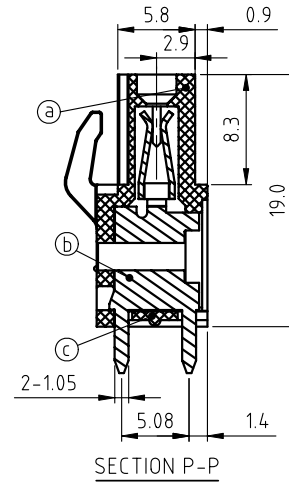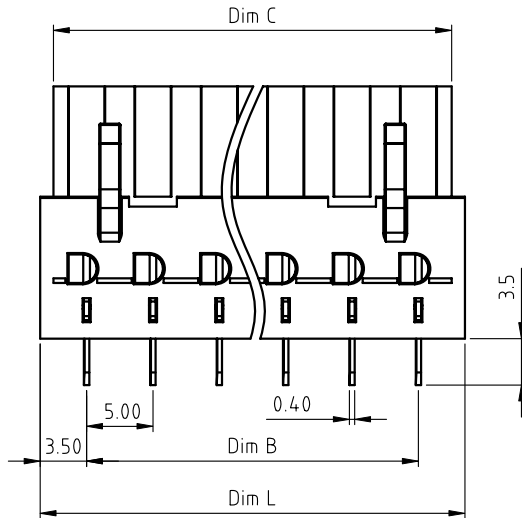

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Female contact: PhBz(CuSn), Tin plated
- Item ③ Terminal cover: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

PART NO.: V7 xx 7 1 x 0 00J0 G

DIM		TOL				
		2P-5P	6P-10P	11P-15P	16P-20P	21P-24P
Dim L	Nx5.0+2.0	±0.15	±0.20	±0.25	±0.30	±0.40
Dim B	(N-1)x5.0	±0.15	±0.20	±0.25	±0.30	±0.40
Dim C	Nx5.0	⁰ _{-0.20}			⁰ _{-0.30}	
Dim D	(N-1)x5.0	±0.15	±0.20	±0.25	±0.30	±0.40

- Solid block
No. of poles
02 2poles
03 3poles
... ..
24 24poles

- Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title TERMINAL BLOCK
				angles 	scale MM
				X*±1"	PLUGGABLE PCB PLUG,VERTICAL
dr	EVIN ZHONG	043014			dwg no V7xx71x000J0G
enrg	EVIN ZHONG	043014			sheet 1 of 1 size A4
chr	HANKE FENG	043014			type CUSTOMER Drawing
appd	SHI JUN	043014			
sheet index	revision	A			
	sheet	1			