



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



15 Watts

VCP Series



- Low Cost
- Output Voltages from 5 to 24 V
- PCB Mounting
- Open Frame & Encapsulated Versions
- IT & Medical Approvals
- Class II Construction
- No Load Input Power <0.3 W

Specification

Input

Input Voltage	• 90-264 VAC
Input Frequency	• 47-63 Hz
Input Current	• 0.5 A max at 90 VAC
Inrush Current	• 40 A max at 240 VAC, cold start at 25 °C
Power Factor	• EN61000-3-2, class A
No Load Input Power	• <0.3 W
Input Protection	• Internal T2.0A/250 V fuse in line

Output

Output Voltage	• See table
Initial Set Accuracy	• $\pm 2\%$ at 50% load
Minimum Load	• No minimum load required
Start Up Delay	• 2 s max
Start Up Rise Time	• 100 ms typical
Hold Up Time	• 5 ms typical at full load and 115 VAC
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• 2% max, 0-100% load
Transient Response	• 10% max. deviation, recovery to <1% within 500 μ s for a 50% step load change at 0.2 A/ μ s
Ripple & Noise	• See table
Overvoltage Protection	• See table
Overload Protection	• 120-280 %, auto recovery
Short Circuit Protection	• Trip and restart (hiccup mode)
Temperature Coefficient	• 0.2 %/°C

General

Efficiency	• See table
Isolation	• 4000 VAC Input to Output
Switching Frequency	• 132 kHz typical
MTBF	• 250 kHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

Operating Temperature	• 0 °C to +70 °C, derate from 100% load at 50 °C to 50% load at 70 °C
Cooling	• Natural convection
Operating Humidity	• 5-90% RH, non-condensing
Storage Temperature	• -20 °C to +80 °C
Vibration	• 10-300 Hz, 2 g 15 mins/sweep. 30 mins for each of 3 axes

EMC & Safety

Emissions	• EN55011/22, level B conducted & radiated
Harmonic Currents	• EN61000-3-2, class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, ± 4 kV indirect contact, ± 8 kV air, Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m, Perf Criteria A
EFT/Burst	• EN61000-4-4, level 2, Perf Criteria A
Surge	• EN61000-4-5 installation class 3, Perf Criteria A
Conducted Immunity	• EN61000-4-6, 3 V, Perf Criteria A
Magnetic Field	• EN61000-4-8, 1 A/m, Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms, Perf Criteria A, B, B
Safety Approvals	• EN60950-1, cUL60950-1, IEC60950-1, EN60601-1, cUL60601-1, IEC60601-1

Models and Ratings


Output Power	Output Voltage ⁽²⁾	Output Current	Ripple & Noise ⁽¹⁾	OVP Setting ⁽³⁾	Efficiency ⁽⁵⁾	Model Number ⁽⁴⁾
10 W	5.0 V	2.00 A	100 mV	10.0 V	74%	VCP15US05
15 W	12.0 V	1.25 A	100 mV	20.0 V	82%	VCP15US12
15 W	15.0 V	0.90 A	150 mV	25.0 V	83%	VCP15US15
15 W	24.0 V	0.63 A	200 mV	35.0 V	84%	VCP15US24

Notes


1. Measured at DC output connector using 20 MHz bandwidth and 0.1 μF ceramic capacitor in parallel with 10 μF electrolytic capacitor placed at connector terminals.
2. Other voltages between 5.0 V and 24 V are available, consult sales for details.
3. Typical trip point.
4. For encapsulated versions, add suffix '-E' to the model number e.g VCP15US24-E.
5. Average of efficiencies measured at 25%, 50%, 75% & 100% load and 230 VAC input.

Mechanical Details

Open Frame Version

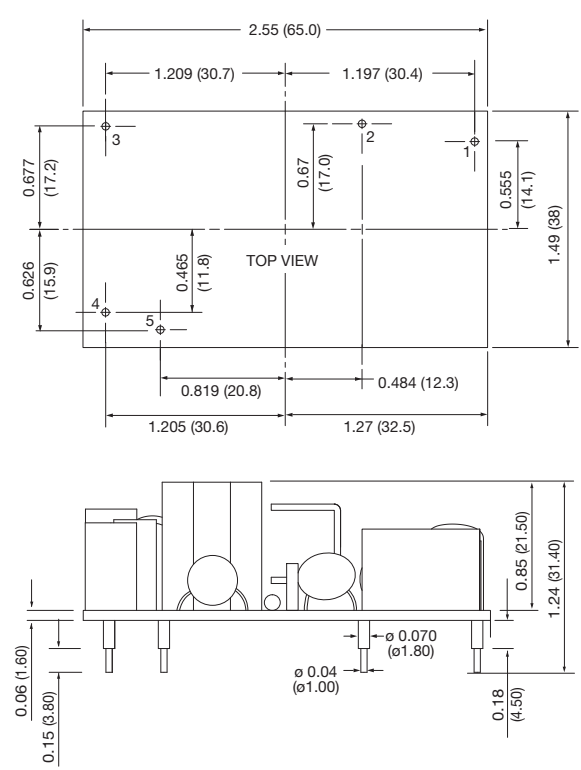

Encapsulated Version (-E)

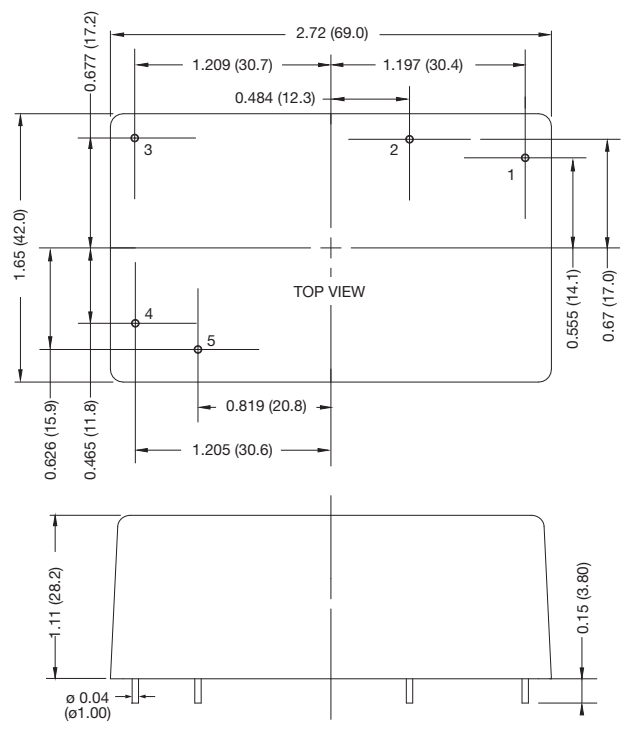

Pin	Designation
1	Live
2	Neutral
3	No connection
4	Output -VE
5	Output +VE

Notes

1. All dimensions are in inches (mm).
2. Weight: Open frame versions: 0.09 lbs (40 g) approx.
Encapsulated versions: 0.22 lbs (100 g) approx.
3. Tolerance: x.xx = ±0.04 (x.x = ±0.1); x.xxx = ±0.2 (x.xx = ±0.5)

