



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Conductive Sensors Hanging Probes Types VH1, VH2, A94-10

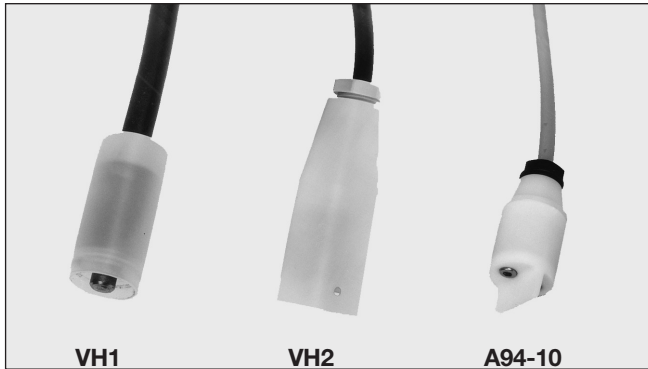

- VH1 and VH2: Hanging electrodes with Neoprene cable
- A94-10: Hanging probe for (swimming) pool level control



Product Description

The sensors VH1 and VH2 (swimming) pool level control. For use with amplifier (please refer to separate data sheets). The sensor A94-10 is a hanging probe for

Ordering Key

VH 1

Type

Type Selection

Electrode isolation	Ordering no. 1 electrode	Ordering no. 2 electrodes
No	VH 1	A 94-10
Yes	VH 2	

Specifications

Electrodes	
Isolation	
VH2	Nylon 6
Material	Stainless steel AISI316/DIN1.4401
Housing	
Material	
VH1, VH2	Nylon 6
A94-10	Polyester
Dimensions	
VH1	Ø 18 x 36,5 mm
VH2	Ø 32 x 75,5 mm
A94-10	Ø 22 x 75,0 mm
Connection	
VH1, VH2	Cable (Neoprene), 5 m, 1 x 2.5 mm ²
A94-10	Cable (PVC), 5 m, 2 x 0.5 mm ²
Environment	
Degree of protection	IP 67
Operating temperature	
VH1, VH2	0 to +90°C (+32° to +194°F)
A94-10	0 to +60°C (+32° to +140°F)
Storage temperature	-25° to +100°C (-13° to +212°F)
CE marking	IEC 529

Dimensions

