



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HiPerFET™ Power MOSFET

H-Bridge Topology in ECO-PAC 2

N-Channel Enhancement Mode


High dv/dt, Low t_{rr} , HDMOS™ Family

$$I_{D25} = 75 \text{ A}$$

$$V_{DSS} = 100 \text{ V}$$

$$R_{DS(on)} = 25 \text{ m}\Omega$$

$$t_{rr} \leq 200 \text{ ns}$$



Pin arrangement see outlines

MOSFETs				
Symbol	Conditions	Maximum Ratings		
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	100		V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 1 \text{ M}\Omega$	100		V
V_{GS}	Continuous	± 20		V
V_{GSM}	Transient	± 30		V
I_{D25}	$T_C = 25^\circ\text{C}$	75		A
I_{DM}	$T_C = 25^\circ\text{C}$, pulse width limited by T_{JM}	300		A
I_{AR}	$T_C = 25^\circ\text{C}$	75		A
E_{AR}	$T_C = 25^\circ\text{C}$	30		mJ
dv/dt	$I_S \leq I_{DM}$, $di/dt \leq 100 \text{ A}/\mu\text{s}$, $V_{DD} \leq V_{DSS}$, $T_J \leq 150^\circ\text{C}$, $R_G = 2 \Omega$	5		V/ns
P_D	$T_C = 25^\circ\text{C}$	300		W
Symbol	Conditions	Characteristic Values		
		$(T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_{DSS}	$V_{GS} = 0 \text{ V}$, $I_D = 250 \mu\text{A}$	100		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 4 \text{ mA}$	2.0		4 V
I_{GSS}	$V_{GS} = \pm 20 \text{ V}_{DC}$, $V_{DS} = 0$			$\pm 100 \text{ nA}$
I_{DSS}	$V_{DS} = 0.8 \cdot V_{DSS}$; $T_J = 25^\circ\text{C}$ $V_{GS} = 0 \text{ V}$; $T_J = 125^\circ\text{C}$			250 μA 1 mA
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$, $I_D = 0.5 I_{D25}$ Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$			25 m Ω
g_{fs}	$V_{DS} = 10 \text{ V}$; $I_D = I_{D25}$, pulse test	25	30	S
C_{iss}	$V_{GS} = 0 \text{ V}$, $V_{DS} = 25 \text{ V}$, $f = 1 \text{ MHz}$		4500	pF
C_{oss}			1600	pF
C_{rss}			800	pF
$t_{d(on)}$	$V_{GS} = 10 \text{ V}$, $V_{DS} = 0.5 \cdot V_{DSS}$, $I_D = 0.5 I_{D25}$ $R_G = 2 \Omega$, (External)		20	30 ns
t_r			60	110 ns
$t_{d(off)}$			80	110 ns
t_f			60	90 ns
$Q_{g(on)}$	$V_{GS} = 10 \text{ V}$, $V_{DS} = 0.5 \cdot V_{DSS}$, $I_D = 0.5 I_{D25}$		180	260 nC
Q_{gs}			36	70 nC
Q_{gd}			85	160 nC
R_{thJC}	with heatsink compound (0.42 K/m.K; 50 μm)			0.5 K/W
R_{thCK}		0.25		K/W

Features

- HiPerFET™ technology
 - low $R_{DS(on)}$
 - low gate charge for high frequency operation
 - unclamped inductive switching (UIS) capability
 - dv/dt ruggedness
 - fast intrinsic reverse diode
- ECO-PAC 2 package
 - isolated back surface
 - enlarged creepage towards heatsink
 - application friendly pinout
 - low inductive current path
 - high reliability
 - solderable pins for PCB mounting

Applications

- drives and power supplies
- battery or fuel cell powered
- automotive, industrial vehicle etc.
- secondary side of mains power supplies

IXYS reserves the right to change limits, test conditions and dimensions.

515

Source-Drain Diode

Characteristic Values

(T_J = 25°C, unless otherwise specified)

Symbol	Conditions	min.	typ.	max.	
I _S	V _{GS} = 0 V			75	A
I _{SM}	Repetitive;			300	A
V _{SD}	I _F = I _{D25} , V _{GS} = 0 V, Pulse test, t ≤ 300 μs, duty cycle d ≤ 2%			1.75	V
t _{rr}	I _F = 25 A, -di/dt = 100 A/μs, T _J = 25°C V _R = 25 V T _J = 125°C		300	200	ns ns

Temperature Sensor NTC

Symbol	Conditions	min.	typ.	max.	
R ₂₅	T = 25°C	4.75	5.0	5.25	kΩ
B _{25/50}			3375		K


Module

Symbol	Conditions	Maximum Ratings	
T _{VJ}		-40...+150	°C
T _{stg}		-40...+125	°C
V _{ISOL}	I _{ISOL} ≤ 1 mA; 50/60 Hz; t = 1 s	3600	V~
M _d	mounting torque (M4)	1.5 - 2.0 14 - 18	Nm lb.in.
a	Max. allowable acceleration	50	m/s ²

Symbol	Conditions	min.	typ.	max.	
d _s	Creepage distance on surface (Pin to heatsink)	11.2			mm
d _A	Strike distance in air (Pin to heatsink)	11.2			mm
Weight		24			g

Data according to IEC 60747 refer to a single diode or transistor unless otherwise stated

Dimensions in mm (1 mm = 0.0394")

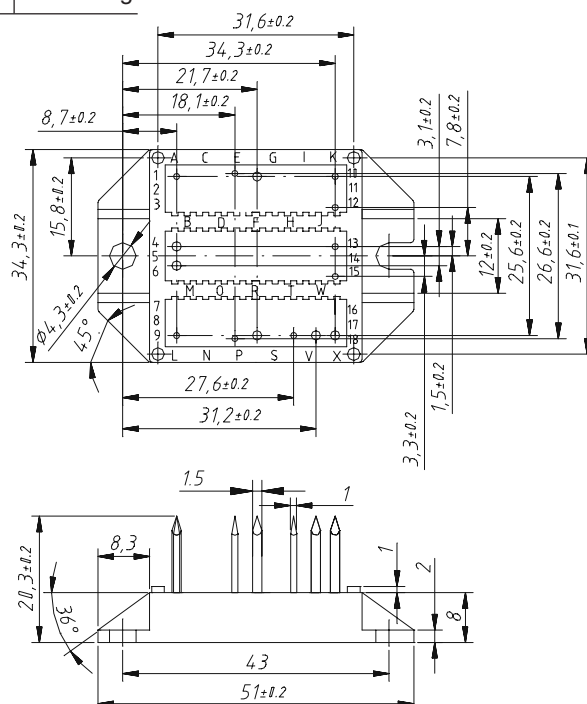

IXYS reserves the right to change limits, test conditions and dimensions.

© 2005 IXYS All rights reserved

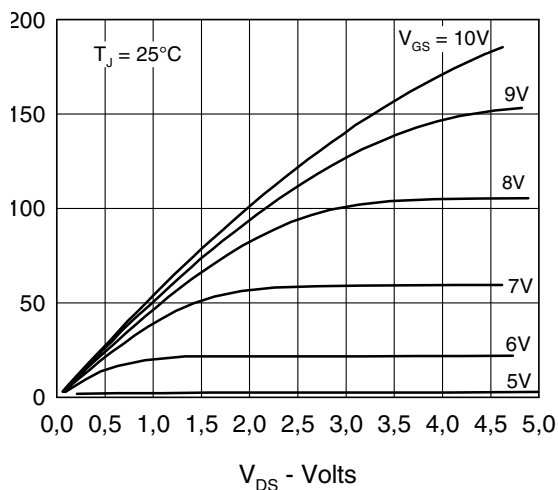


Fig. 1 Output Characteristics

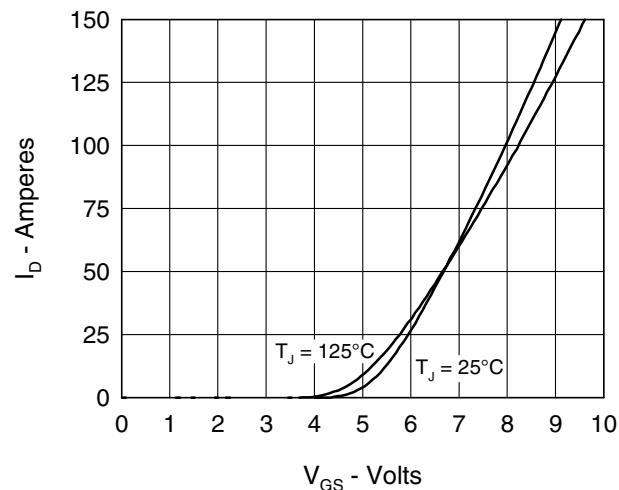


Fig. 2 Input Admittance

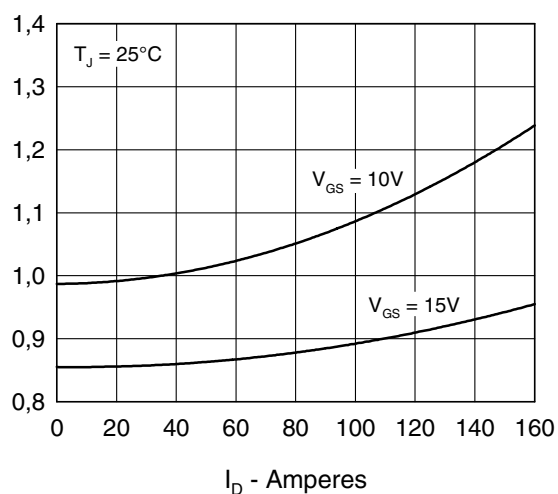


Fig. 3 $R_{DS(on)}$ vs. Drain Current

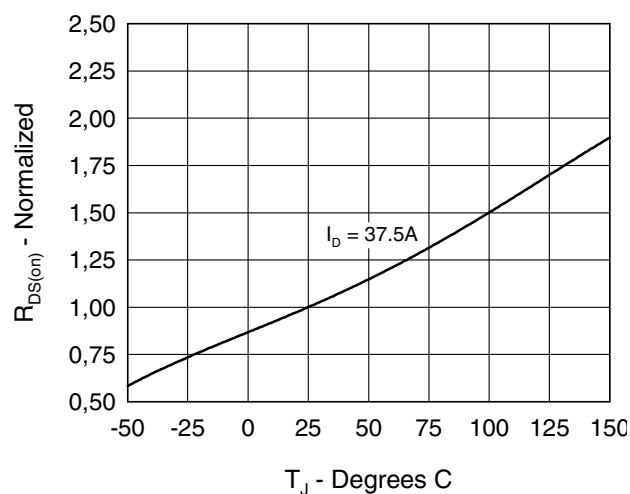


Fig. 4 Temperature Dependence of Drain to Source Resistance

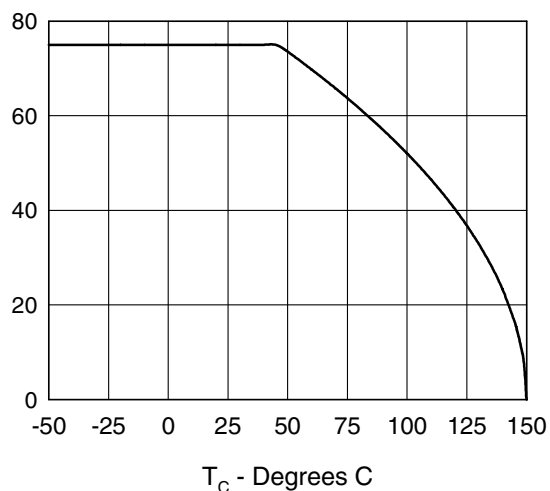


Fig. 5 Drain Current vs. Case Temperature

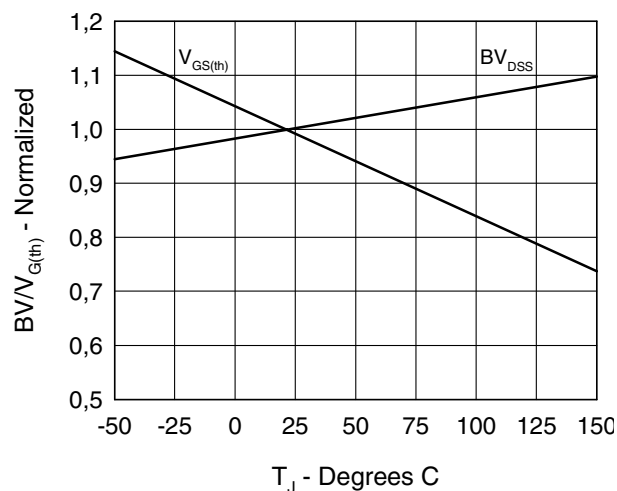


Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage

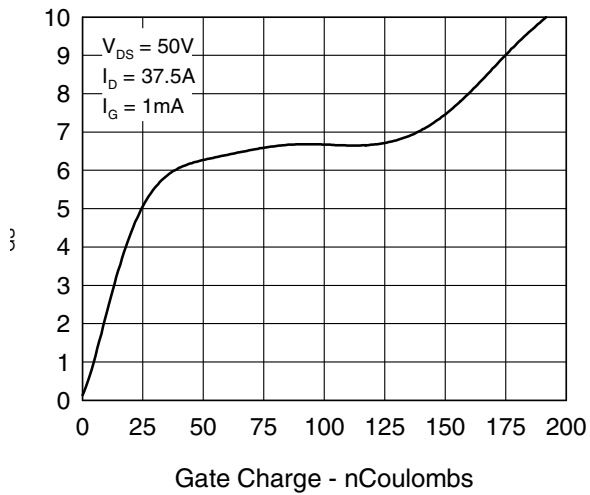


Fig.7 Gate Charge Characteristic Curve

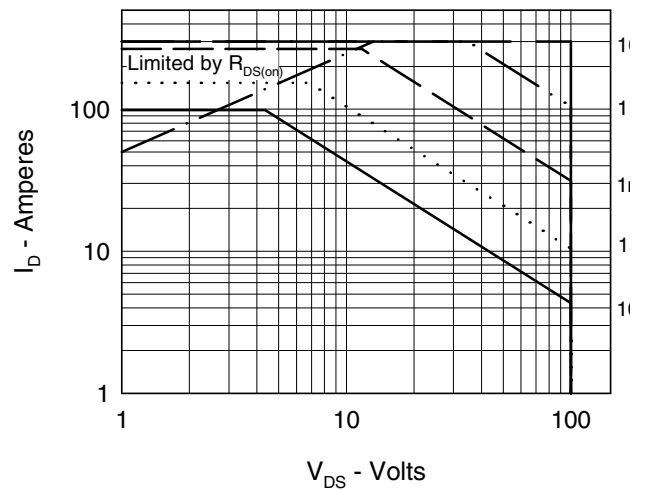


Fig.8 Forward Bias Safe Operating Area

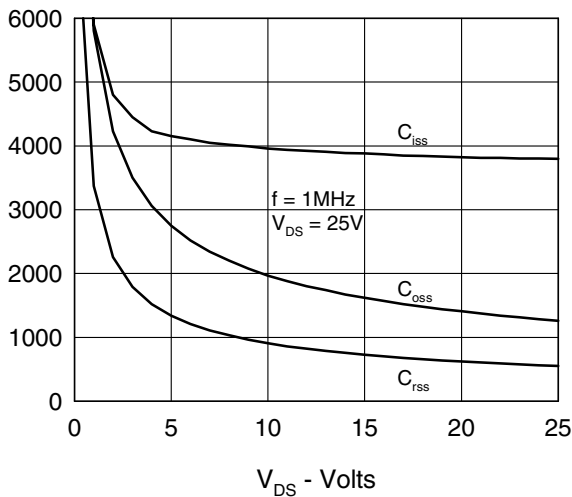


Fig.9 Capacitance Curves

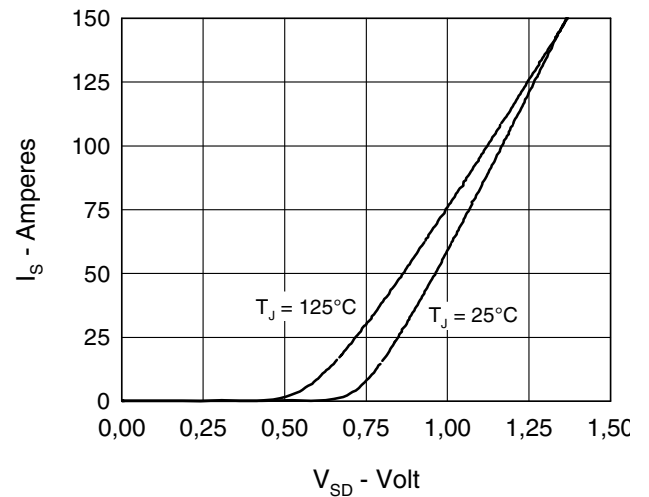


Fig.10 Source Current vs. Source to Drain Voltage

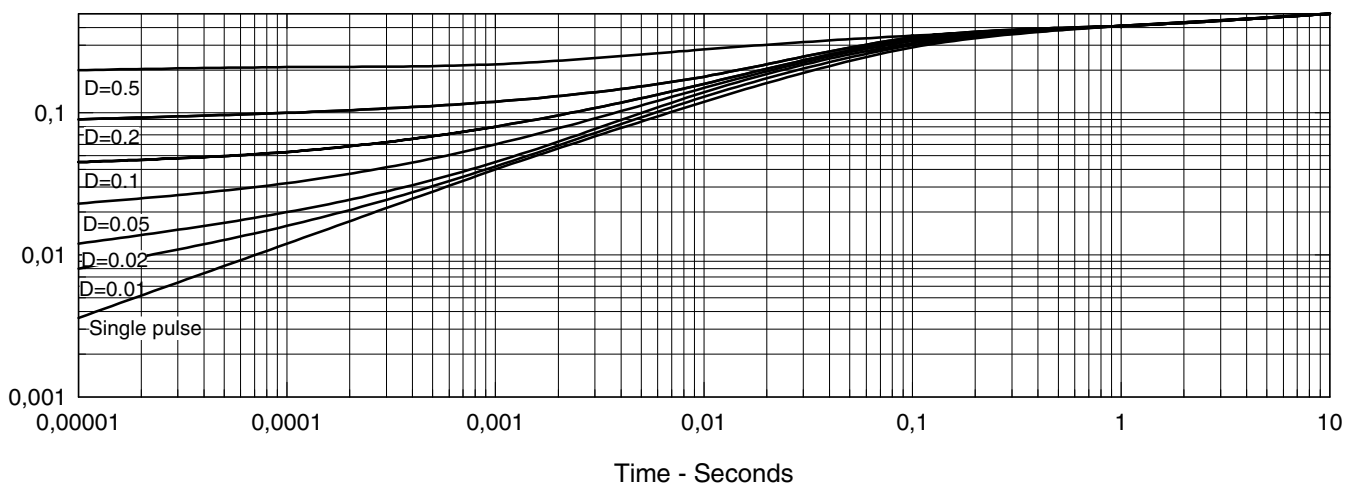


Fig.11 Transient Thermal Impedance