



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Anaconda

## EBX Single Board Computer

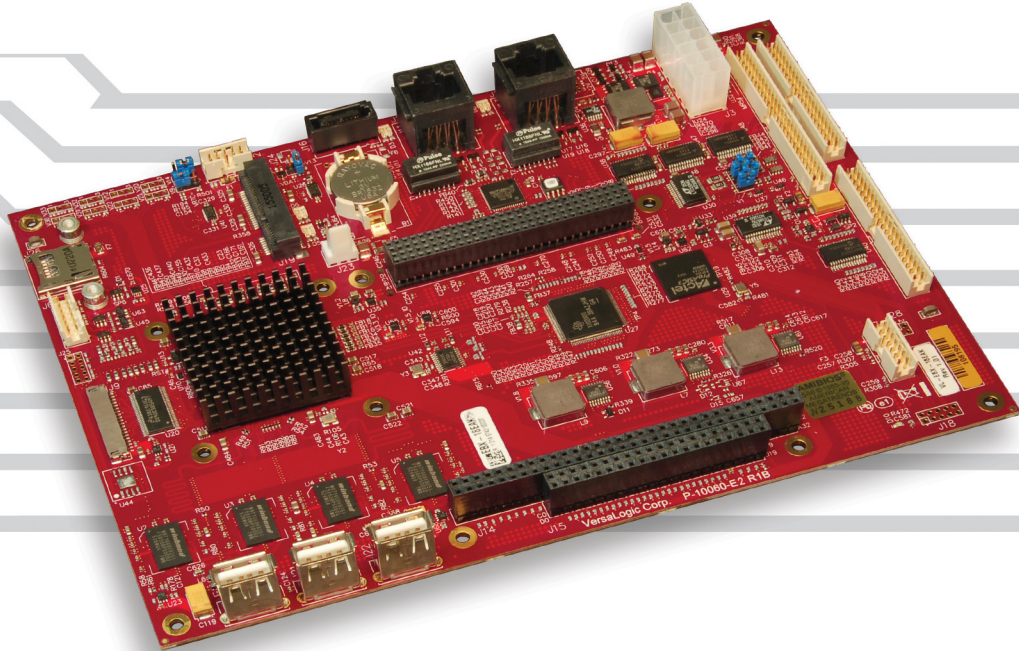

### Overview

The Anaconda is a moderate performance, low power embedded computer designed on a standard EBX form factor. It is powered by a DMP Vortex86DX2 processor that enables the entire board to use less than 7W (typ.). Several I/O interfaces, multiple expansions buses, and thermal management options provide systems designers with flexibility and lower overall system cost.

Anaconda was designed with no moving parts, soldered-on RAM, and ready to withstand high shock and vibration. Industrial temperature versions are available. This Single Board Computer is an ideal choice for applications that require high quality, low-power, and long product life.

As with all VersaLogic products, the Anaconda is backed by a five-year warranty, 5+ year off-the-shelf availability guarantee, and expert US-based technical support. Product Life Extension options support availability through the year 2025.

### Highlights


- Industrial temp. (-40° to +85°C) versions
- Shock & vibration per MIL-STD-202G
- EBX™ form factor
- Low power draw
- Fanless Operation
- DMP Vortex DX2 CPU
- Up to 2 GB soldered-on RAM
- PC/104-Plus expansion
- Dual 10/100 Ethernet
- VGA and LVDS video
- Mini PCIe / mSATA socket
- USB 2.0 ports (5)
- Serial I/O (RS-232/422/485)
- SATA port
- Digital I/O (32 lines)
- Analog Input (8 chan.)
- VersaAPI software support

# Features

- 1 DMP Vortex86DX2 32-bit Processor**  
Vortex86DX2 x86 low power processor with integrated I/O and 2D graphics engine.
- 2 Video Output**  
LVDS video output for flat panel displays. Standard analog VGA output. Simultaneous output from both ports.
- 3 Network Support**  
Dual Ethernet interfaces, autotdetect 10BaseT / 100BaseTX with network boot capability.
- 4 RAM**  
Up to 2 GB soldered-on memory.
- 5 SATA**  
One SATA 1.5 Gb/s port supports high-capacity storage (solid-state drives or rotating media).
- 6 Device I/O**  
Five USB 2.0 ports support keyboard, mouse, and other devices (6a). Two RS-232/422/485 and two RS-232 serial ports, and three 8254 timer/counters (6b).
- 7 Analog + Digital I/O**  
On-board data acquisition support. Eight analog inputs (7a) and thirty-two digital I/O lines (7b).
- 8 MicroSD Socket**  
Supports removable microSD card solid-state drives.
- 9 Mini PCIe/mSATA Socket**  
Supports Wi-Fi modems, Ethernet, Analog I/O, Serial ports, GPS, MIL-STD-1553, Ethernet, solid-state mSATA drives, and other plug-in devices.

- 10 SPI Interface**  
Supports SPI and SPX devices, including low cost analog and digital modules.
- 11 PC/104 Expansion**  
Industry-standard PC/104-Plus expansion site.
- 12 Power Input**  
Wide input 9 to 15V or 5V. Jumper selectable.

- Industrial Temperature Versions**  
-40° to +85°C operation for harsh environments.
- MIL-STD-202G**  
Qualified for high shock and vibration environments.
- Software Support**  
Compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, and Linux.  
Linux support includes VersaAPI software for onboard I/O devices.

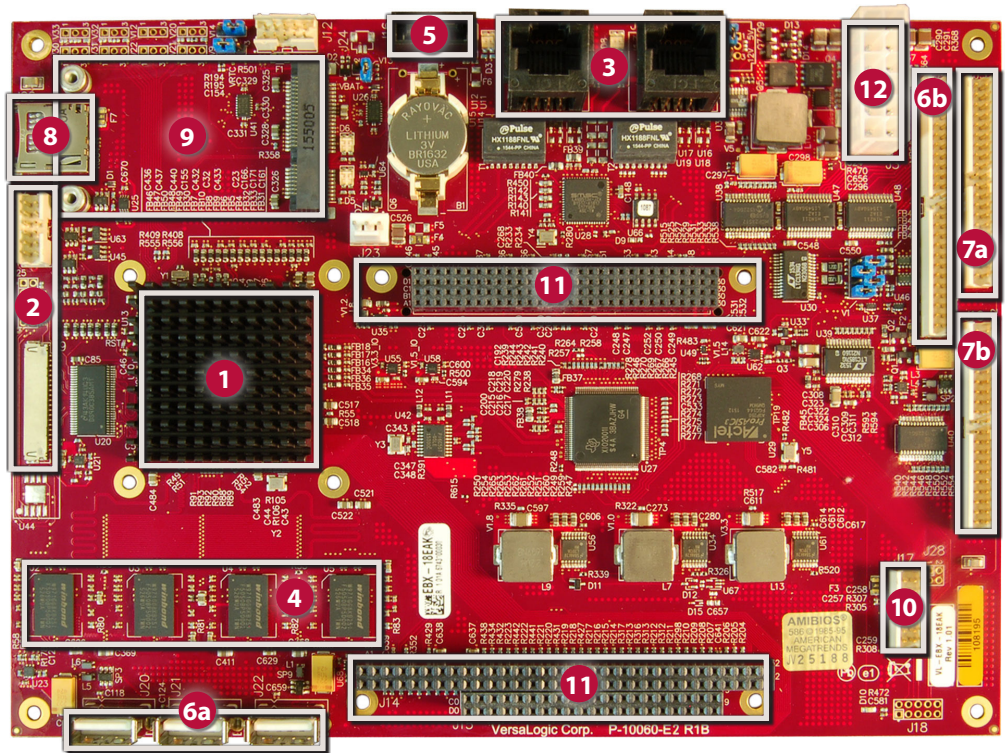

## Tailor Anaconda to Your Exact Requirements

Customization options are available in quantities as low as 100 pieces.

- Conformal Coating
- Custom Labeling
- Custom Screening
- Custom Cabling
- BGA Underfill
- Application-Specific Testing
- Connector & I/O Changes
- BIOS Modifications
- Software and Drivers
- And more –
- Custom Testing
- Revision Locks

## Specifications

General				
<b>Board Size</b>	EBX standard: 5.75" x 8" (146 mm x 203 mm)			
<b>Processor</b>	DMP Vortex86DX2 32-bit			
<b>Input Voltage</b>	5V +/- 5% or wide input: 9 to 15V (12V nominal). Jumper selectable.			
Power Requirements §	Model	Idle	Typical	Max.
	VL-EBX-18SAK	5.5W	5.8W	6.0W
	VL-EBX-18SBK	6.0W	6.5W	7.0W
	VL-EBX-18SCK	6.0W	6.8W	7.5W
	VL-EBX-18EAK	5.5W	5.8W	6.0W
	VL-EBX-18EBK	6.0W	6.5W	7.0W
	VL-EBX-18ECK	6.0W	6.3W	6.5W
<b>System Reset &amp; Hardware Monitors</b>	All voltage rails monitored. Watchdog timer with programmable timeout. CPU temperature monitoring. Push-button reset.			
<b>Stackable Bus</b>	PC/104-Plus expansion site			
Manufacturing Standards	Standard	IPC-A-610 Class 2 modified		
	Special Order	IPC-A-610 Class 3 modified		
<b>RoHS</b>	Compliant			

Environmental		
<b>Operating Temperature</b> ◊	0° to +60°C or -40° to +85°C <i>See Ordering Information for Specific Models</i>	
<b>Storage Temperature</b>	-40° to +85°C	
Altitude	Operating *	To 4,570m (15,000 ft.)
	Storage	To 12,000m (40,000 ft.)
Airflow Requirements	Temp. Range	Airflow Requirements
	Standard 0° to +60°C	0.5 Linear Meters per Second (100 Linear Feet per Minute)
	Extended -40° to +85°C	0.5 Linear Meters per Second (100 Linear Feet per Minute)
<b>Thermal Shock</b>	5°C/min. over operating temperature	
<b>Humidity</b>	Less than 95%, noncondensing	
<b>Vibration, Sinusoidal Sweep</b> □	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis	
<b>Vibration, Random</b> □	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis	
<b>Mechanical Shock</b> □	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis	

Memory	
<b>System RAM</b>	Up to 2 GB DDR2 soldered-on memory.

§ Represents operation at +25°C and +12V running Windows 7 with on-board, VGA display, SATA, Ethernet, COM, and USB keyboard/mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power measured with 95% CPU utilization.

‡ TVS protected port (enhanced ESD protection)

# Power pins are overload protected

◊ Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)

\* For extended altitude information contact VersaLogic Sales Dept.

□ MIL-STD-202G shock and vibrate levels were used to illustrate the overall ruggedness of this product. Certification at higher levels or different types of shock or vibration methods per the specific requirements of the application is available. Contact a VersaLogic Sales Engineer for further information.

Specifications are subject to change without notification. EBX and PC/104-Plus are trademarks of the PC/104 Consortium. All other trademarks are the property of their respective owners.

Video	
<b>General</b>	Integrated video controller.
<b>VRAM</b>	Up to 64 MB shared DRAM frame buffer.
<b>Desktop Display Interface</b> ‡	Standard analog output (VGA). Up to 1920 x 1440 (60 Hz). 32-bit. 2 mm IDC connector.
<b>OEM Flat Panel Interface</b> #	LVDS interface. 18/24-bit. Up to 1024 x 768 (60 Hz). 8 bpp. CMOS-selectable TFT panel types. Support for FPD power control.

Mass Storage	
<b>Rotating Drives / Flash / Solid-State Drives</b>	One SATA 1.5 Gb/s port with latching connector. One Mini PCIe / mSATA socket (SATA signaling, bootable) One microSD socket. Supports up to 32 GB. Bootable.

Network Interface	
<b>Ethernet</b> ‡	Two autodetect 10BaseT/100BaseTX ports with RJ45 connectors.
<b>Network Boot Option</b>	Via BIOS extension

Device I/O	
<b>USB</b> # ‡	Five USB 2.0 host ports.
<b>COM 1 / 2</b> ‡	RS-232 16C550 compatible.
<b>COM 3 / 4</b> ‡	RS-232/422/485 selectable. 16C550 compatible.
<b>Analog Input</b>	Eight channels. 12-bit. Single-ended and/or differential pairs. 100 Ksps. 0 to 5V, ±5V, 0 to +10V, and ±10V
<b>Digital I/O</b>	Thirty-two TTL I/O lines 3.3V. Independently configurable.
<b>Audio</b>	Optional. Use VL-ADR-01 audio interface.
<b>Counter/Timers</b>	Three 8254 16-bit timers
<b>AT Peripherals</b> #	PS/2 Keyboard and mouse port.

Other I/O	
<b>Mini PCIe / mSATA Socket</b>	Full-size Mini PCIe / mSATA socket. Supports Wi-Fi modems, GPS receivers, solid state mSATA drives, and other plug-in modules.
<b>SPI Interface</b>	Supports SPI and SPX devices. Supports up to four SPX modules.

Software	
<b>BIOS</b>	AMI BIOS. Support for USB keyboard/mouse and USB boot.
<b>VersaAPI</b>	VersaLogic Application Programming Interface to support on-board I/O devices (Linux only).
<b>Sleep Mode</b>	None
<b>Operating Systems</b>	Compatible with most x86 operating systems including Windows, Windows Embedded, and Linux. Refer to the detailed software compatibility section on the VersaLogic website for complete operating system information. <b>Constraints for Windows 7 and Windows Embedded 7 operating systems require a platform with a minimum of 1 GB RAM.</b>

## Ordering Information

Model	Nominal Speed	Memory Size	Operating Temp. †	Cooling
VL-EBX-18SAK	933 MHz	512 MB	0° to +60°C	Heat Sink
VL-EBX-18SBK	933 MHz	1 GB	0° to +60°C	Heat Sink
VL-EBX-18SCK	933 MHz	2 GB	0° to +60°C	Heat Sink
VL-EBX-18EAK	800 MHz	512 MB	-40° to +85°C	Heat Sink
VL-EBX-18EBK	800 MHz	1 GB	-40° to +85°C	Heat Sink
VL-EBX-18ECK	800 MHz	2 GB	-40° to +85°C	Heat Sink

† Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)


## Accessories

Part Number	Description
<b>Cable Kit</b>	
VL-CKR-ANACON	Development Cable kit for EBX-18. Includes: VL-CBR-5009, 4004 (x2), 2022, 1201, 0702, and HDW-105 (x2)
VL-CBR-5009	Primary Breakout Cable: 18" 2mm Latching 50-pin to 50-pin
VL-CBR-4004	12" 2mm 40 pin to 40 pin IDC cable
VL-CBR-2022	12" ATX to 10-pin power adapter cable
VL-CBR-1201	12-pin to 15-pin VGA
VL-CBR-0702	20" SATA cable – rugged latching
VL-HDW-105	0.6" standoff package (metric thread)
<b>Cables</b>	
VL-CBR-0401	6.25" ATX to SATA power cable
VL-CBR-1203	12" ATX 12V power adapter cable (12-pins)
VL-CBR-1401	6" 14-pin cable assembly for (2) SPX modules
VL-CBR-1402	12" 14-pin cable assembly for (4) SPX modules
VL-CBR-2014	LVDS to VGA Adapter board
VL-CBR-2015	20" 24-bit LVDS flat panel cable (Hirose)
VL-CBR-2016	20" 18-bit LVDS flat panel cable (JAE)
VL-CBR-2017	20" 24-bit LVDS 20-pin 1mm (Hirose) to 1.25mm (Hirose)
<b>Audio</b>	
VL-ADR-01	USB to Audio Adapter
<b>Solid-State Storage (flash memory)</b>	
VL-F41-xxxx	microSD card (SDIO), SLC, industrial temp.
<b>Drives</b>	
VL-HDS35-xxx	3.5" hard drive (SATA)
<b>Hardware</b>	
VL-PS-ATX12-300A	Bench-top / development power supply
VL-HDW-106	0.6" standoffs, English thread (four per kit)
VL-HDW-108	Mini PCIe / mSATA hardware kit (metric thread) 2.5 mm
<b>Miscellaneous</b>	
VL-HDW-111	Half to Full Size Mini PCIe Adapter kit. Metal adapter and screws (2)
VL-HDW-203	PC/104 extractor tool (metal)

Other configurations are possible. Please contact VersaLogic Sales at (503) 747-2261 to discuss requirements!

## Expansion Modules

Part Number	Description	Form Factor
<b>Network</b>		
VL-MPEe-W2E	Wi-Fi 802.11 a/b/g/n	Mini PCIe
VL-MPEe-E3E	Gigabit Ethernet adapter	Mini PCIe
<b>Serial I/O</b>		
VL-MPEe-U2E	Quad serial plus twelve GPIOs	Mini PCIe
<b>Analog &amp; Digital I/O</b>		
VL-MPEe-A1E	Analog input (12-bit resolution)	Mini PCIe
VL-MPEe-A2E	Analog input (16-bit resolution)	Mini PCIe
VL-SPX-1	Analog Input Module 8-Channels	SPX
VL-SPX-2	Digital I/O Module 16-lines	SPX
VL-SPX-4	Analog Output Module 4-channels 12-bit	SPX
VL-SPX-5	Solid State Switch Module 8-channel	SPX
<b>GPS</b>		
VL-MPEu-G2E	GPS receiver	Mini PCIe
<b>Video</b>		
VL-EPM-V7E	Video Expansion Module: VGA and LVDS	PC/104-Plus
VL-MPEe-V5E	VGA and LVDS Interface	Mini PCIe
<b>Solid-State Storage (flash memory)</b>		
VL-MPEs-F1Exx	mSATA module (4/16/32 GB) (SATA)	Mini PCIe
<b>Adapters</b>		
VL-MPEs-S3E	SATA adapter	Mini PCIe

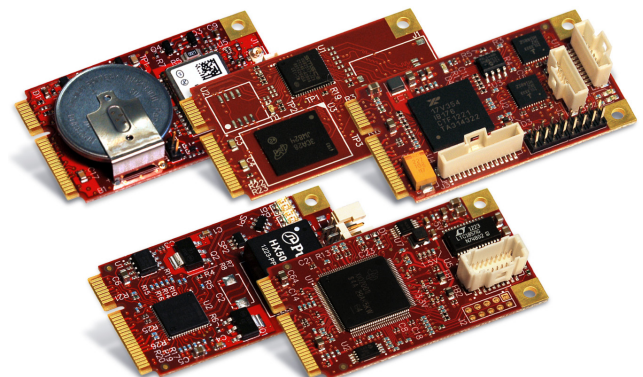

Mini PCIe Modules

## Take the Risk out of Embedded Computing

Whether it's selecting the optimum solution for your application, lending expertise during development, or on-time delivery of defect-free products, VersaLogic is here to make sure your project goes smoothly from initial concept through the extended life of your program. Contact us today to learn more.

ISO 9001:2008 Certified 

