



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



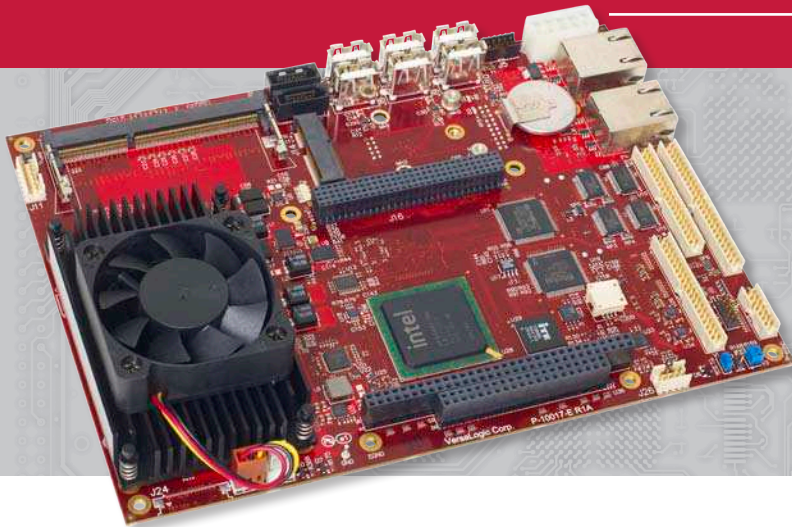

- Intel® Core™2 Duo processor (2.26 GHz)
- High-performance video
- Dual gigabit Ethernet
- DDR3 RAM (up to 8 GB)
- USB 2.0 (6 ports)
- Serial I/O (4 ports)
- SATA (2 ports)
- Analog + Digital I/O
- HD audio
- PCIe Mini Card socket
- Industrial temp. version
- SPX™ I/O expansion

Highlights

EBX Form Factor

Industry-standard format with PC/104-Plus™ expansion.

Intel Core 2 Duo Processor

Very high performance.

High-performance Video

3D video acceleration (Gen 5.0). Analog and LVDS flat panel outputs.

Network Support

Dual gigabit Ethernet with remote boot support.

System RAM

Up to 8 GB DDR3 RAM.

USB I/O

Six USB 2.0 ports support keyboard, mouse, and other devices.

Device I/O

Four serial ports, two SATA ports, and HD audio.

Analog + Digital I/O

On-board data acquisition support. Eight analog inputs + four analog outputs + thirty-two digital I/O on standard models. Additional analog channels in custom configurations.

Mini Card Socket

Supports plug-in Wi-Fi modems, GPS receivers, flash data storage, and other cards.

Flash Memory

eUSB interface for plug-in flash storage. Other flash options available in custom configurations.

Industrial Temperature Version

-40° to +85°C operation for harsh environments.

MIL-STD-202G

Qualified for high shock/vibration environments.

SPX Expansion

Add additional analog, digital, or CANbus modules.

Overview

The Mamba is an embedded single board computer (SBC) featuring a high-performance Intel Core 2 Duo processor. Based on the EBX industry-standard form factor, the Mamba supports PC/104-Plus stackable expansion boards. With its combination of very high performance (up to 2.26 GHz), mid-range power consumption (18.5W typ.), and extensive on-board I/O capabilities, the Mamba is an ideal embedded computer solution for medical, security, defense, transportation, and industrial applications that rely on fast on-board processing of large amounts of data.

Like all VersaLogic products, the Mamba is designed to support OEM applications where high reliability and long-term availability are required. From application design-in support, to its 5+ year production life guarantee, the Mamba provides a durable embedded computer solution with an excellent cost of ownership. The Mamba is manufactured and tested to the highest quality standards and is fully RoHS compliant. Customization is available, even in low OEM quantities.

Details

Driven by a 2nd generation Intel Core 2 Duo processor designed specifically for embedded applications, the Mamba runs at up to 2.26 GHz. Enhanced Intel SpeedStep® technology provides dynamic processor frequency scaling to meet instantaneous performance needs while minimizing power draw and heat dissipation. This allows users to fine-tune the balance between power conservation and performance to suit their application needs.

Intel's GM45 + ICH9M chipset offers graphics core speeds up to 533 MHz for high-end graphics, advanced 3D rendering, high-definition video playback, and media acceleration for video CODECs. A dual-channel LVDS flat panel interface and an analog VGA video interface support a wide range of display configurations.

Mamba's standard on-board features include dual gigabit Ethernet, two SO-DIMM sockets for up to 8 GB DDR3 RAM, six USB 2.0 ports, four serial ports, two SATA ports, HD audio, and eUSB flash storage. On-board data acquisition features include up to sixteen analog inputs, up to eight analog outputs, and thirty-two digital I/O lines. The PC/104-Plus expansion site provides plug-in access to industry-standard expansion modules. Additional system expansion and communications flexibility is available via the on-board PCI Express Mini Card socket which can accommodate plug-in Wi-Fi modems, GPS receivers, and more. VersaLogic's SPX expansion interface creates additional access to cost-effective plug-in I/O including analog, digital, and CANbus solutions.

Available in both industrial (-40° to +85°C) and commercial (0° to +60°C) temperature versions; the Mamba meets MIL-STD-202G specifications for shock and vibration. Transient voltage suppression

(TVS) devices on critical I/O ports provide enhanced electrostatic discharge (ESD) protection for the system.

The Mamba features an embedded BIOS with OEM enhancements from Phoenix Technologies. The field-reprogrammable BIOS supports custom defaults and the addition of firmware applications for security processes, remote booting, and other pre-OS software functions. The Mamba is compatible with a variety of popular operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX.

Ordering Information

Model	Processor	Speed	Operating Temp.
VL-EBX-37A	Intel Core 2 Duo	2.26 GHz	0° to +60°C
VL-EBX-37F	Intel Core 2 Duo	1.2 GHz	-40° to +85°C

Accessories

Part Number	Description
VL-CKR-MAMBA	Development cable kit. <i>Includes bold items below.</i>
VL-CBR-0401	6.25" ATX to SATA power adapter cable
VL-CBR-0701	19.75" SATA cable
VL-CBR-0803	12" 8-pin latching / two 3.5 mm stereo line in / out cable
VL-CBR-1201	12-pin 2 mm latching / 15-pin VGA adapter cable
VL-CBR-2022	ATX to 10-pin power cable
VL-CBR-4004	I/O cable and paddleboard
VL-CBR-5009	Primary breakout cable and paddleboard
VL-HDW-105	0.6" standoff package (metric thread)
VL-CBR-0201	Wi-Fi antenna adapter cable
VL-CBR-0702	19.75" SATA cable, latching
VL-CBR-1401	Cable assembly for two SPX modules
VL-CBR-1402	Cable assembly for four SPX modules
VL-CBR-2010	20" 18-bit LVDS flat panel cable (Hirose)
VL-CBR-2011	20" 18-bit LVDS flat panel cable (JAE)
VL-CBR-2012	20" 24-bit LVDS flat panel cable (Hirose)
VL-CBR-2014	LVDS to VGA adapter board
VL-CBR-ANT01	Wi-Fi (802.11n) antenna
VL-CFA-2A	CompactFlash adapter (SATA)
VL-ENCL-5C	Development enclosure
VL-F15-xxxx	eUSB module (USB)
VL-F23-xxxx	MiniBlade™ module (USB)
VL-TBD-xxxx	Disk on Module (SATA)
VL-HDS35-xxx	3.5" hard drive (SATA)
VL-HDW-106	0.6" standoff package (English thread)
VL-HDW-107	PCI Express Mini Card mounting hardware kit
VL-MM7-xxxx	DDR3 SDRAM module
VL-PS200-ATX	Development power supply
VL-SPX-x	SPX expansion modules
VL-WD10-CBN	PCI Express Mini Card: 802.11g/n wireless

* Power specifications represent operation at +25°C with +5V supply running Windows XP with 1 GB RAM, dual Ethernet, keyboard, and mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power is measured with 95% CPU utilization.

† TVS protected port (enhanced ESD protection)

‡ Power pins on this port are overload protected

Specifications are subject to change without notification. Intel, Intel Core, and SpeedStep are trademarks of Intel Corp. MiniBlade is a trademark of the SFF-SIG. SPX is a trademark of VersaLogic Corp. All other trademarks are the property of their respective owners.

02/15/13

Specifications

General	Board Size	EBX standard: 5.75" x 8" (146 mm x 203 mm)			
	Processor	Intel Core 2 Duo (P8400). Up to 1066 MHz FSB. 3 MB L2 cache. Temperature protected.			
	Chipset	GM45 + ICH9M			
	Power Requirements *	Model	Idle	Typical	Max
		VL-EBX-37A	2.4A (12.0W)	3.7A (18.5W)	5.0A (25.0W)
		VL-EBX-37F	2.2A (11.0W)	2.9A (14.3W)	3.5A (17.5W)
	System Reset & Hardware Monitors	Major voltage rails monitored. Watchdog timer with 20 ms resolution.			
	Stackable Bus	PC/104-Plus: PCI, ISA			
	Other I/O Expansion	PCI Express Mini Card socket. SPX interface.			
	RoHS	RoHS (2002/95/CE) compliant			
Environmental	Operating Temperature	Model	Operating Temperature		
		VL-EBX-37A	0° to +60°C		
		VL-EBX-37F	-40° to +85°C		
	Storage Temperature	-40° to +85°C			
	Airflow Requirements	Free air from -40° to +85°C			
	Thermal Shock	5°C/min. over operating temperature			
	Humidity	Less than 95%, noncondensing			
	Vibration, Sinusoidal Sweep	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 minutes per axis			
	Vibration, Random	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 minutes per axis			
	Mechanical Shock	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis			
Memory	System RAM	Two SO-DIMM sockets. Up to 8 GB DDR3 SDRAM.			
Video	General	Integrated high-performance video. Intel GMA 4500 MHD graphics core. Optional video adapter card converts LVDS output to VGA for dual VGA operation.			
	VRAM	Up to 512 MB shared DRAM			
	Desktop Display Interface †	Standard analog output (VGA)			
	OEM Flat Panel Interface	Dual-channel LVDS interface. 18/24-bit. CMOS-selectable TFT panel types. Up to 1920 x 1200 (24 bits).			
	Mass Storage	Hard Drive	Two SATA (Revision 2.0) ports		
Flash	Standard	eUSB (USB signaling)			
	Custom	MiniBlade (USB or SATA signaling)			
		SATA DOM (SATA signaling)			
Network Interface	Ethernet †	Two autodetect 10BaseT/100BaseTX/1000BaseT ports			
	Network Boot Option	Intel boot agent (downloadable) supports PXE protocol. Argon Managed Boot Agent (optional with royalty fee) supports PXE, RPL, NetWare, TCP/IP (DHCP, BOOTP) remote boot protocols.			
Device I/O	USB †‡	Six USB 2.0/1.1 ports			
	COM 1/2 Interface †	RS-232. 16C550 compatible. 115 Kbps.			
	COM 3/4 Interface †	RS-232/422/485 selectable. 16C550 compatible. 460 Kbps.			
	Analog Input	Standard	Eight channels		
		Custom	Sixteen channels		
			12-bit. Single-ended. 100 Ksps. Per-channel input ranges of 0 to +5V, ±5V, 0 to +10V, and ±10V.		
	Analog Output	Standard	Four channels		
		Custom	Eight channels		
		12-bit. Single-ended. 100 Ksps. 0 to +4.096V.			
	Digital I/O	Thirty-two TTL I/O lines (3.3V). Independently configurable.			
Audio †	Digital HD audio in/out				
Counter/ Timers	Three general-purpose timer inputs				
Other	PS/2 keyboard and mouse				
Software	BIOS	Phoenix Technologies Embedded BIOS with OEM enhancements. Field reprogrammable. User-configurable CMOS defaults.			
	Operating Systems	Compatible with most x86 operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX			