



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



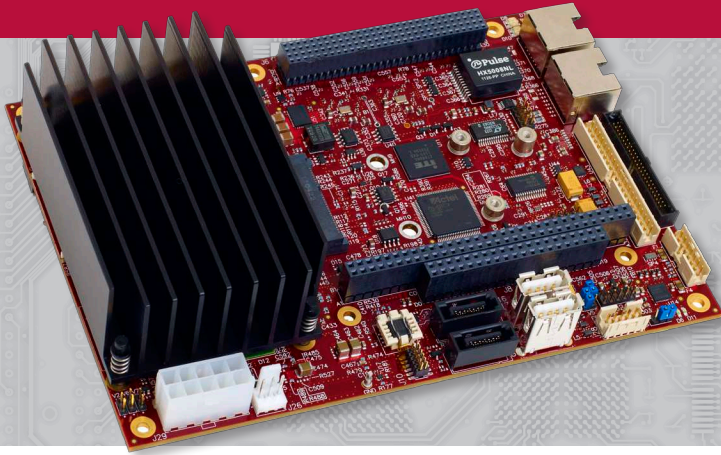

- Intel® Atom™ processor
 - D425 (single core) or
 - D525 (dual core)
- Industrial temp. versions
- Shock & vibrate per MIL-STD-202G
- Fanless versions
- High-performance video
- Gigabit Ethernet (2 ports)
- DDR3 RAM (up to 4 GB)
- USB 2.0 (6 ports)
- Serial I/O (4 ports)
- SATA (2 ports)
- Analog input (8 chan.)
- Analog output (4 chan.)
- Digital I/O (16 lines)
- PCIe Mini Card socket
- CompactFlash socket

Highlights

EPIC™ Form Factor

Industry-standard format with PC/104-Plus expansion.

Intel Atom D525 or D425 Processor

1.8 GHz performance. Single or dual core options. Low power consumption.

Industrial Temperature Version

-40° to +85°C operation for harsh environments.

MIL-STD-202G

Qualified for high shock/vibration environments.

High-performance Video

Graphics core supports DirectX 9c, OpenGL 1.5, and MPEG-2 decoding. Analog and LVDS flat panel outputs.

Network

Dual GbE with remote boot support.

Analog + Digital I/O

On-board data acquisition. Eight analog inputs, four analog outputs, sixteen digital I/O lines, two timers.

RAM

Up to 4 GB DDR3 RAM.

USB

Six USB ports support keyboard, mouse, and other devices.

SATA

Supports bootable SATA hard drive and mSATA flash storage options.

PCIe Mini Card Socket

Supports Wi-Fi modems, GPS receivers, MIL-STD-1553, solid-state storage, and other plug-in devices.

Flash Memory

CompactFlash socket, eUSB interface, and PCIe Mini Card socket with mSATA support for plug-in flash storage.

Device I/O

Four serial ports and HD audio.

SPX Expansion

Add low cost analog, digital, and CANbus modules.

Overview

The Iguana is a low-power / high-performance single board computer (SBC) with extensive on-board I/O. Driven by an Intel Atom D525 or D425 processor, the Iguana provides 1.8 GHz performance with dual- and single-core options. Based on the industry-standard EPIC form factor (4.5 x 6.5 inches), this SBC is an excellent solution for embedded applications with substantial I/O requirements.

As with all VersaLogic products, the Iguana is designed to support OEM applications where high reliability and long-term availability are required. From application design-in support, to its 5+ year production life guarantee, the Iguana provides a durable embedded computer solution with an excellent cost of ownership. The Iguana is manufactured to IPC-A-610 Class 2 standards and is fully RoHS compliant.

Details

Driven by an Intel Atom D525 (dual core) or D425 (single core) processor, the Iguana provides 1.8 GHz performance with low power consumption (9–13W typical). Enhanced low-power states allow designers to further minimize overall power consumption.

The integrated Intel GMA 3150 graphics core supports DirectX 9c, OpenGL 1.5, MPEG-2 decoding, and adaptive interlacing. A single-channel LVDS flat panel interface and an analog VGA video interface support Extended Desktop, Clone, and Twin display modes. An optional adapter converts LVDS output to VGA for dual VGA operation.

Basic on-board features include dual Gigabit Ethernet with network boot capability, up to 4 GB DDR3 RAM, six USB host ports, four serial ports, SATA interface with support for two devices, and HD audio. Removable flash storage is provided via CompactFlash socket, eUSB interface, and a PCI Express Mini Card socket with mSATA support.

On-board data acquisition features include eight analog inputs, four analog outputs, sixteen digital I/O lines, and two general purpose timers. An industry-standard PC/104-Plus expansion site provides plug-in access to off-the-shelf expansion modules from numerous vendors. The PCI Express Mini Card socket accommodates plug-in Wi-Fi modems, GPS receivers, MIL-STD-1553, solid-state storage, and other plug-in devices. The SPX expansion interface provides low-cost plug-in expansion for additional analog, digital, and CANbus I/O.

Available in both standard (0° to +60°C) and full industrial temperature (-40° to +85°C) versions, the rugged Iguana board meets MIL-STD-202G specifications for mechanical shock and vibration. Optional latching Ethernet connectors provide additional ruggedization for use in extremely harsh environments. Transient voltage suppression (TVS) devices on critical I/O ports provide enhanced electrostatic discharge (ESD) protection for the system.

The Iguana features an American Megatrends (AMI) UEFI BIOS with OEM enhancements. The field-reprogrammable BIOS supports custom defaults, USB booting, and other application functions. Iguana is compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX.

Product customization is available, even in low OEM quantities. Customization options include latching Ethernet headers, pass-through PCI and ISA connectors, three 8254 Programmable Interval Timers, conformal coating, revision locks, custom labeling, customized testing and screening, etc.

Ordering Information

Model	Processor	Cores	Speed	Operating Temp.	Cooling
VL-EPIC-25SA	Atom D425	Single	1.8 GHz	0° to +60°C	Heatsink (fanless)
VL-EPIC-25SB	Atom D525	Dual	1.8 GHz	0° to +60°C	Heatsink (fanless)
VL-EPIC-25EA	Atom D425	Single	1.8 GHz	-40° to +85°C	Fan
VL-EPIC-25EAR [^]	Atom D425	Single	1.8 GHz	-40° to +85°C	Fan
VL-EPIC-25RA [*]	Atom D425	Single	1.8 GHz	-40° to +85°C	Fan
VL-EPIC-25RB [*]	Atom D525	Dual	1.8 GHz	-40° to +85°C	Fan

[^] Conformal coated - Urethane

^{*} Special order. Ruggedized Ethernet connectors.

Accessories

Part Number	Description
Cable Kit	
VL-CKR-IGUA	Development cable kit
VL-CBR-5013	System I/O paddleboard
VL-CBR-4004	Paddleboards for analog and digital I/O
VL-CBR-2022	ATX power adapter cable
VL-CBR-1201	12-pin 2 mm (latching) / 15-pin VGA adapter
VL-CBR-0702	19.75" SATA cable (latching)
VL-CBR-0401	6.25" ATX to SATA power adapter
VL-HDW-105 (x2)	0.6" standoff package (metric thread)
Cables	
VL-CBR-0701	19.75" SATA cable
VL-CBR-0804	12" Ethernet adapter (latching)
VL-CBR-1401	Cable assembly for (2) SPX modules
VL-CBR-1402	Cable assembly for (4) SPX modules
VL-CBR-2010	20" 18-bit LVDS flat panel (Hirose)
VL-CBR-2011	20" 18-bit LVDS flat panel (JAE)
VL-CBR-2014	LVDS to VGA adapter board
Memory	
VL-MM7-xxxx	DDR3 SDRAM module
SSD	
VL-CFM-xxx	CompactFlash module (IDE)
VL-F15-xxxx	eUSB module (USB)
VL-F29-xxxx	mSATA module (SATA)
Expansion Modules	
VL-SPX-x	SPX expansion module
Development	
VL-ENCL-5x	Development enclosure
VL-PS200-ATX	200W ATX-style development power supply
Hardware	
VL-HDW-106	0.6" standoff package (English thread)
VL-HDW-107	PCIe Mini Card / mSATA hardware kit (metric thread)
VL-HDW-109	eUSB hardware kit
Miscellaneous	
VL-CF-CLIP1	CompactFlash retention clip
VL-HDW-201	PC/104™ board extraction tool

[†] Power specifications represent operation at +25°C with +5V supply running Windows XP with 2 GB RAM, LVDS display, SATA, GbE, and USB keyboard/mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power is measured with 95% CPU utilization.

[‡] TVS protected port (enhanced ESD protection)

[§] Power pins on this port are overload protected

Specifications are subject to change without notification. Intel and Atom are trademarks of Intel Corp. EPIC and PC/104-Plus are trademarks of the PC/104 Consortium. PCI Express is a registered trademark of PCI-SIG. SATA and mSATA are trademarks of the Serial ATA International Organization. SPX is a trademark of VersaLogic Corp. All other trademarks are the property of their respective owners.

Specifications

General	Board Size	EPIC standard: 115 mm x 165 mm (4.5" x 6.5")				
	Processor	Intel Atom D425 (single core) or D525 (dual core). 512K L2 cache per core.				
	Chipset	Intel 82801HBM ICH8 Mobile (ICH8M)				
	Power Requirements (+5V) [†]	Model	Idle	Typical	Max.	S3
		VL-EPIC-25SA	8.4W	9.1W	9.7W	0.8W
		VL-EPIC-25SB	10.4W	11.7W	12.9W	0.8W
		VL-EPIC-25EA / RA	9.4W	10.1W	10.7W	0.8W
		VL-EPIC-25RB	11.4W	12.7W	13.9W	0.8W
	System Reset & Hardware Monitors	Major voltage rails monitored. Watchdog timer with programmable timeout. CPU temperature and fan speed monitoring. Push-button reset and power.				
	Stackable Bus	PC/104-Plus: PCI, ISA				
Manufacturing Standards	IPC-A-610 Class 2 compliant					
RoHS	RoHS (2002/95/CE) compliant					
Environmental	Operating Temperature	<i>See Ordering Information</i>				
	Storage Temperature	-40° to +85°C				
	Cooling	<i>See Ordering Information</i>				
	Airflow Requirements	None (free air within operating temperature range)				
	Thermal Shock	5°C/min. over operating temperature				
	Humidity	Less than 95%, noncondensing				
	Vibration, Sinusoidal Sweep	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 minutes per axis				
	Vibration, Random	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 minutes per axis				
	Mechanical Shock	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis				
	Memory	System RAM	One SO-DIMM socket. Up to 4 GB DDR3 SDRAM. 800 MT/s (400 MHz clock).			
Video		General	Integrated high-performance video. Intel GMA 3150 graphics core supports DirectX 9c, OpenGL 1.5, MPEG-2 decode, and adaptive interlacing. Analog and LVDS flat panel video interfaces support Extended Desktop, Clone, and Twin display modes. Optional video adapter card converts LVDS output to VGA for dual VGA operation.			
	VRAM	Up to 224 MB shared DRAM				
	Desktop Display Interface [‡]	Standard analog output (VGA). 24-bit. Up to 2048 x 1536 (60 Hz).				
	OEM Flat Panel Interface [§]	Single-channel LVDS interface. 18-bit. Up to 1366 x 768 (60 Hz). CMOS-selectable TFT panel types.				
Mass Storage	Rotating Drive	Two SATA (Revision 2.0) ports. Latching SATA connectors.				
	Flash/SSD	eUSB (USB signaling)				
		CompactFlash (IDE signaling) mSATA (SATA signaling)				
Network Interface	Ethernet [‡]	Two autodetect 10BaseT/100BaseTX/1000BaseT ports. On-board status LEDs and external LED header. IEEE 1588 Precision Time Protocol (PTP) compatible.				
		Standard	RJ45 connectors			
		Special Order	Latching headers			
	Network Boot Option	Via BIOS extension				
Device I/O	USB ^{‡§}	Six host USB 2.0 ports				
	COM 1/2/3/4 Interface [‡]	RS-232/422/485 selectable. 16C550 compatible. 460 Kbps.				
	Analog Input	Eight channels. 12-bit. Single-ended. 100 Ksps. Per-channel input ranges of 0 to +5V, ±5V, 0 to +10V, and ±10V.				
	Analog Output	Four channels. 12-bit. Single-ended. 100 Ksps. 0 to +4.096V.				
	Digital I/O	Sixteen TTL I/O lines (3.3V). Independently configurable.				
	Audio	Intel High-Definition Audio (HDA)				
	Counter/Timers	Standard	Two general-purpose 16-bit timers			
		Custom	Three 8254 Programmable Interval Timers			
Other I/O	PCIe Mini Card Socket	Supports Wi-Fi modems, GPS receivers, non-volatile flash data storage with auto-detect mSATA support, and other plug-in modules				
	VersaLogic SPX Interface	Add low cost analog, digital, and CANbus modules				
Software	BIOS	American Megatrends (AMI) UEFI BIOS with OEM enhancements. Field reprogrammable. Support for USB keyboard/mouse and USB boot. User-configurable CMOS defaults.				
	Sleep Mode	ACPI 3.0. Support for S0, S3 and S4 suspend states and C1 processor state.				
	Operating Systems	Compatible with most x86 operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX				