



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



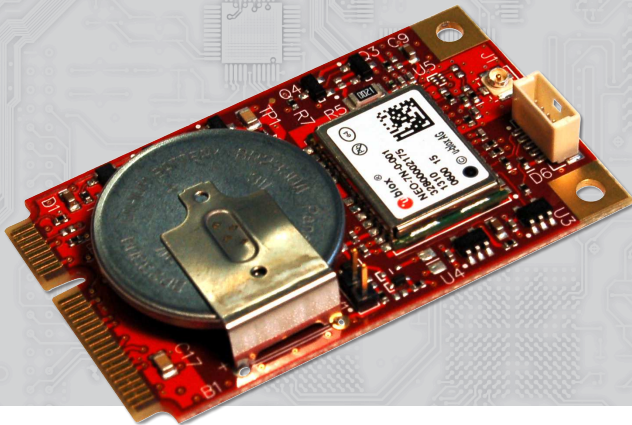

- Extremely small Mini PCIe module format
- GPS receiver
- Precision time reference
- Industrial temp. (-40° to +85°C) operation
- MIL-STD-202G shock/vibe
- Latching connectors

Highlights

Mini PCIe Module Format

Small and flexible.

GPS Receiver

Supports GPS, GLONASS, Galileo, and QZSS. NMEA, UBX, and RTCM protocols.

Precision Time Reference

GPS/atomic clock precision pulse output.

Industrial Temperature Operation

-40° to +85°C operation for harsh environments.

MIL-STD-202G

Qualified for high shock/vibration environments.

Latching Connectors

Prevents detachment failures.

Class 3 Manufacturing (optional)

IPC-A-610 Class 3 for applications requiring extreme reliability.

Overview

The VL-MPEu-G2 is an extremely small and rugged GPS module based on the industry-standard Mini PCIe module format. Unlike typical I/O expansion boards, Mini PCIe allows additional I/O functions to be added to a system with almost no increase in overall system / package size. Mini PCIe modules provide a simple, economical, and standardized way to add I/O functions to embedded computer products.

Details

In a very small package, this GPS receiver board provides global positioning and time-stamp information in embedded systems.

This GPS receiver module delivers complete position, velocity, and time (PVT) data for use in host applications. The GPS receiver provides simultaneous 56-channel operation for stable satellite tracking and aided GPS startup for fast initial signal acquisition. Support for GPS (United States), GLONASS (Russian), Galileo, and QZSS systems provide complementary coverage to enable reliable tracking in difficult environments such as cityscape / building canyons. GPS data is available in NMEA, UBX, and RTCM protocols. The GPS data is accessed via USB.

In addition to positioning and navigation applications, GPS/GNSS signals are widely used as accurate and low-cost precision time or frequency references used by remote or distributed wireless communication, industrial, financial, and power-distribution equipment. The TIMEPULSE output generates a precision time reference via a pulse train synchronized with the GPS or UTC time grid. Linked to the satellites' atomic clocks, this output produces intervals configurable from 0.25 Hz to 10 MHz. The high precision time reference may be used as a low frequency time synchronization pulse or as a high frequency reference signal. By default, the time pulse signal is configured to 1 pulse per second.

The standard model includes an on-board battery to retain satellite position data and support fast restart of the GPS chip. Connection to an external 3.0V battery is also supported.

This rugged product is designed and tested for full industrial temperature operation (-40° to +85°C). It also meets MIL-STD-202G specifications for shock and vibration. Latching connectors provide additional ruggedization, making it at home in harsh environments.

This GPS receiver board is compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, and Linux.

The module utilizes USB signaling and can be used in any system that supports USB signaling at the Mini PCIe socket.

It is manufactured to IPC-A-610 Class 2 standards. Class 3 versions are available for extremely-high-reliability applications.

Product customization is available, even in low quantities. Options include conformal coating, application-specific testing, BOM revision locks, special labeling, etc.



Ordering Information

| Model | Function | Operating Temp. |
|---------------|----------------------------------|-----------------|
| VL-MPEu-G2E | GPS receiver with backup battery | -40° to +85°C |
| VL-MPEu-G2E-Z | GPS receiver, no battery | -40° to +85°C |

Accessories

| Part Number | Description |
|-----------------|--|
| Cables | |
| VL-CBR-0202 | 12" U.FL to RP-SMA female bulkhead – antenna cable |
| VL-CBR-0502 | 12" 5-wire timing and battery cable |
| VL-CBR-ANT02 | GPS antenna with SMA connector - supports GPS signals |
| VL-CBR-ANT03 | Active antenna with SMA connector - supports GPS and GLONASS signals |
| Hardware | |
| VL-HDW-108 | Mini PCIe module hold-down screws (10) for use with 2.5 mm standoffs |
| VL-HDW-110 | Mini PCIe module hold-down screws (10) for use with 2.0 mm standoffs |

Specifications


| General | | |
|-------------------------------|---|----------------------------------|
| Board Size | Mini PCIe module (full size): 30 mm x 50.95 mm x 6.32 mm | |
| Power Requirements | 3.3V @ 0.22W (supplied from the Mini PCIe socket) | |
| Manufacturing Standards | Standard | IPC-A-610 Class 2 modified |
| | Optional | IPC-A-610 Class 3 modified |
| Regulatory Compliance | RoHS | |
| Mini PCIe Signal Type | USB 2.0 | |
| Environmental | | |
| Operating Temperature | -40° to +85°C | |
| Storage Temperature | -40° to +85°C | |
| Altitude * | Operating | To 15,000 ft. (4,570m) |
| | Storage | To 40,000 ft. (12,000m) |
| Cooling | None (fanless) | |
| Airflow Requirements | None (free air) | |
| Thermal Shock | 5°C/min. over operating temperature | |
| Humidity | Less than 95%, noncondensing | |
| Vibration, Sinusoidal Sweep † | MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis | |
| Vibration, Random ‡ | MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis | |
| Mechanical Shock ‡ | MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 msec. duration per axis | |
| Device I/O | | |
| GPS/GLONASS | On-board GPS/GLONASS module | |
| Accuracy | Autonomous Position | 2.5m |
| | SBAS Position | 2.0m |
| | Velocity | 0.01 m/s |
| Startup Time | Aided Start | 5 sec. |
| | Hot Start | 1 sec. |
| | Cold Start | 29 sec. |
| Timing Output | The TIMEPULSE output generates pulse trains synchronized with the GPS time grid. The default time pulse signal is 1 pulse per second. Latching connector. | |
| | Frequency Range | 0.25 Hz to 10 MHz (configurable) |
| | Interface | 3.3V TTL |
| Sensitivity | Tracking | -162 dBm |
| | Reacquisition | -160 dBm |
| Antenna ‡ | U.FL antenna connector. Compatible with active antennas only. Latching connector. | |
| Host Communication | Interface | Mini PCIe – USB signaling |
| | Protocol | NMEA, UBX, RTCM |
| Battery – On-board | On-board battery facilitates faster startup times | |
| Battery – External | Supports external 3.0V battery to facilitate faster startup times | |
| Software | | |
| Operating Systems | Compatible with most x86 operating systems including Windows, Windows Embedded, and Linux | |

* Extended altitude specifications available upon request

† MIL-STD-202G shock and vibrate levels are used to illustrate the ruggedness of this product in general. Testing to higher levels and/or different types of shock or vibration methods can be accommodated per the specific requirements of the application. Contact a VersaLogic Sales Engineer for further information.

‡ Short circuit protection

Specifications are subject to change without notification. PCI Express is a registered trademark of the PCI-SIG. All other trademarks are the property of their respective owners.

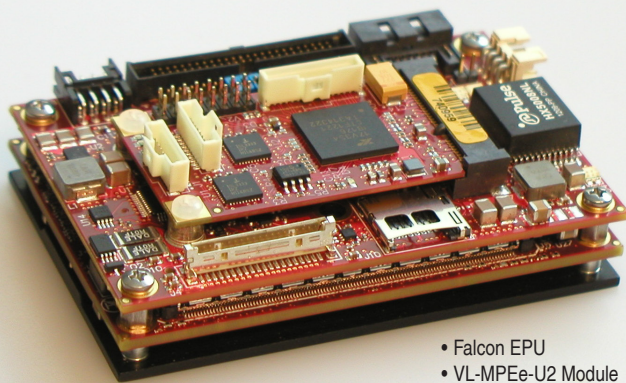

- Falcon EPU
- VL-MPEe-U2 Module

Other VersaLogic Mini PCIe Modules

| Model | Function | Signaling |
|-------------|--|-----------|
| VL-MPEe-A1E | Analog input (12-bit resolution) | PCIe |
| VL-MPEe-A2E | Analog input (16-bit resolution) | PCIe |
| VL-MPEe-FW1 | 1394 Firewire Module, Industrial Temp. | PCIe |
| VL-MPEe-E3E | Gigabit Ethernet adapter | PCIe |
| VL-MPEe-U2E | Quad serial plus twelve GPIOs | PCIe |
| VL-MPEe-W2E | Wi-Fi 802.11 a/b/g/n | PCIe |
| VL-MPEs-F1E | mSATA drive (4/16/32 GB) | SATA |
| VL-MPEs-S3E | SATA adapter | SATA |