

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










VLM-520-02 Series

OUTLINE DIMENSIONS (UNITS: mm)

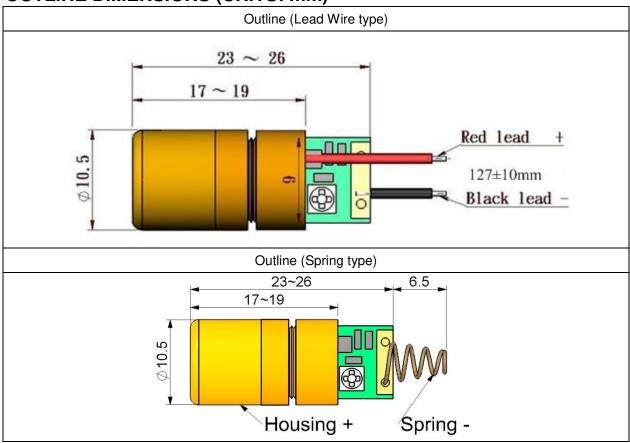

SPECIFICATIONS

or con to Artono		
SPECIFICATIONS	520-02	
	LPT	LPA
Dimensions	Ф10.5 x 26 mm (Ф0.413" x 1.023")	
Operating voltage (Vop)	7V~10V	
Operating current (lop)	<80mA	<100mA
Continuous wave output power (Po)	<1mW	<4mW
Wavelength at peak emission (λp)	505~530mm	
Collimating lens	Aspherical plastic lens(ø7)	
Focus Range	100mm ~ Infinity	
Spot size at 5M		
Divergence (Half Angle)	0.5 mrad	
Operating temp. range	+10°C ~+40°C	
Storage temp. range	-20°C ~+65°C	
Housing	Brass	
Mean time to failure (MTTF) 25℃	5000hrs	10000hrs
	Dimensions Operating voltage (Vop) Operating current (Iop) Continuous wave output power (Po) Wavelength at peak emission (λp) Collimating lens Focus Range Spot size at 5M Divergence (Half Angle) Operating temp. range Storage temp. range Housing	LPTDimensionsΦ10.5 x 26 mm (eOperating voltage (Vop)7V~Operating current (Iop)<80mA

Note: Laser module housing is an electrical positive surface, it is imperative that contact between the laser module and the machine be avoided. This is to prevent damage from the machine electrical leakage. Surge protected power